



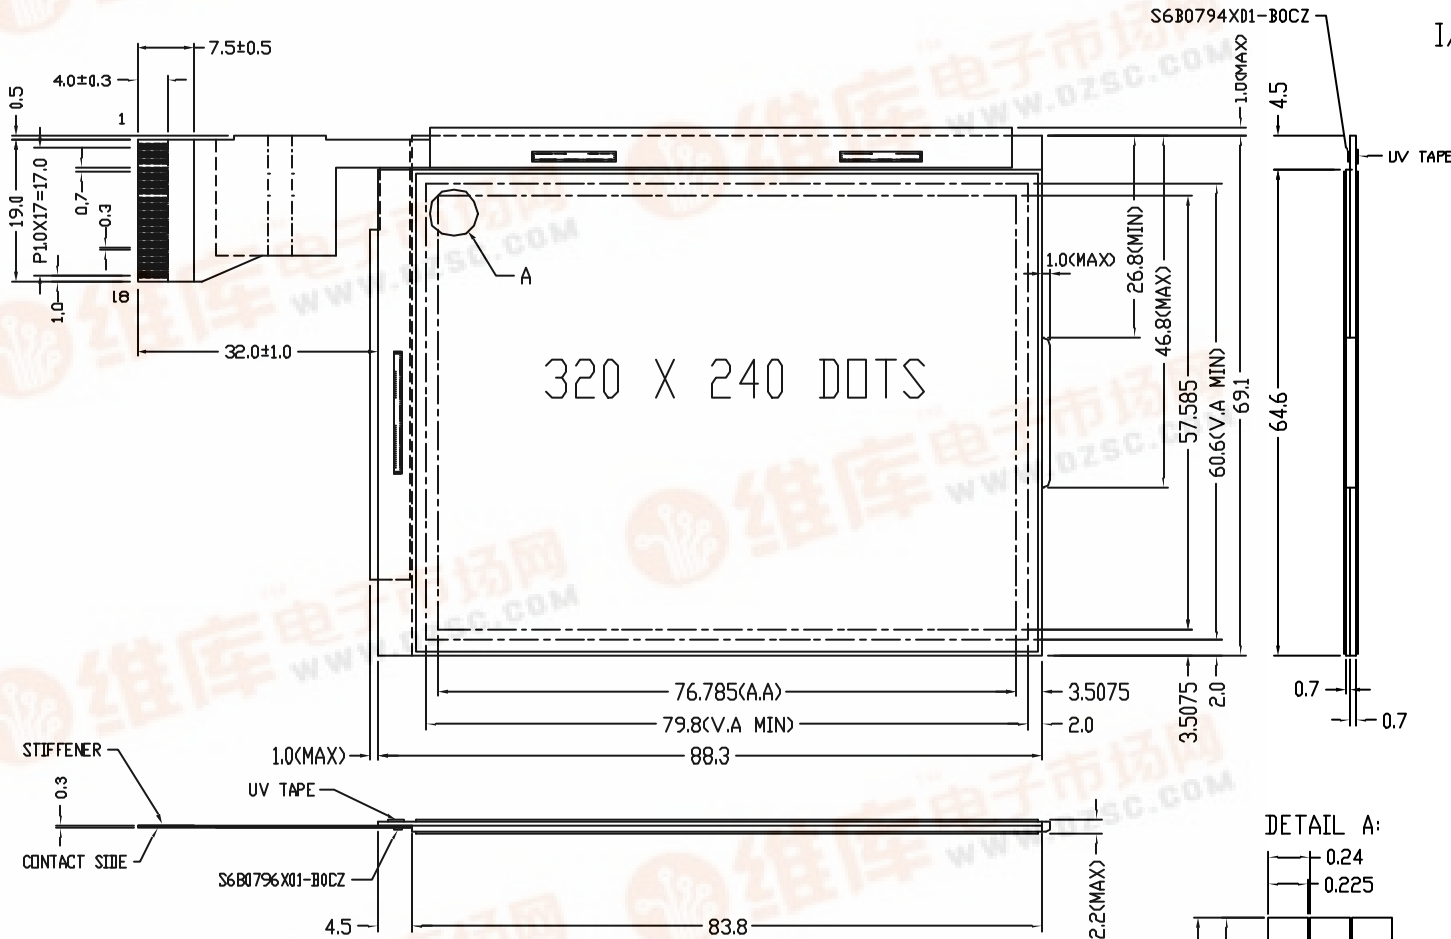

I/O PORTS

NO.	SYMBOL
1	VLCD
2	V2
3	V3
4	V4
5	V5
6	VSS
7	GND
8	VDD
9	FRM
10	CP
11	DF
12	LOAD
13	D.OFF
14	GND
15	D3
16	D2
17	D1
18	D0

DETAIL A:



NOTES:

1. DISPLAY TYPE: FSTN
2. VIEWING DIRECTION: 9:00
3. POLARIZER MODE: TRANFLECTIVE/POSITIVE
4. DRIVE METHOD: 1/240 DUTY 1/12 BIAS
5. LCD OPERATING VOLTAGE: 15.2V VDD=3.0V
6. OPERATING TEMP: -10°C~+60°C
7. STORAGE TEMP: -20°C~+70°C
8. CONNECTOR: FPC
9. DRIVER: S6B0794X01-B0CZ(2)+S6B0796X01-B0CZ(1)
10. BACKLIGHT TYPE: NONE
11. UNMARKED TOLERANCES: ±0.3mm



TIAN-MA MICROELECTRONICS CO.

6/F., CASTEC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:

BY:

CHECKED BY:


BY:

APPROVED BY:

BY:

TITLE: TM320240ACIWLG

DWG NO: G-1



SCALE:

UNIT: mm