

TRIAC(Through Hole / Isolated)

TMG25C60J


SanRex Triac **TMG25C60J** is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

Features

- $I_{T(RMS)}=25A$
- High Surge Current
- Low Voltage Drop
- Lead-Free Package

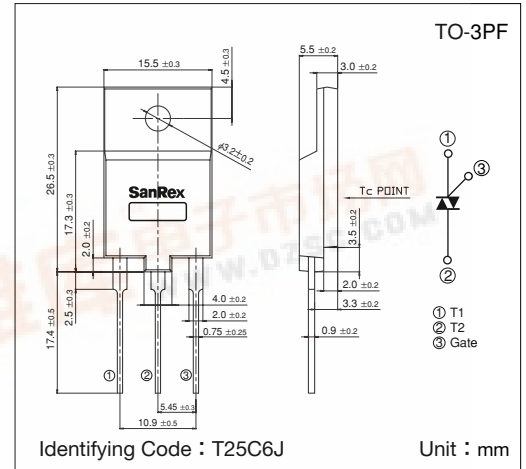

Maximum Ratings


(T_j=25°C unless otherwise specified)

Symbol	Item	Reference	Ratings	Unit
V _{DRM}	Repetitive Peak Off-State Voltage		600	V
I _{T(RMS)}	R.M.S. On-State Current	T _c =83°C	25	A
I _{TSM}	Surge On-State Current	One cycle, 50Hz/60Hz, Peak value non-repetitive	225/250	A
I _t	I _t (for fusing)		260	A ² S
P _{GM}	Peak Gate Power Dissipation		5	W
P _{G(AV)}	Average Gate Power Dissipation		0.5	W
I _{GM}	Peak Gate Current		2	A
V _{GM}	Peak Gate Voltage		10	V
V _{ISO}	Isolation Breakdown Voltage (R.M.S.)	A.C. 1minute	1500	V
T _j	Operating Junction Temperature		-40~+125	°C
T _{stg}	Storage Temperature		-40~+150	°C
	Mass		5.6	g

Electrical Characteristics


Symbol	Item		Reference	Ratings			Unit
				Min.	Typ.	Max.	
IDRM	Repetitive Peak Off-State Current		VD=VDRM, Single phase, half wave, Tj=125℃			5	mA
VTM	Peak On-State Voltage		IT=35A, Inst. measurement			1.4	V
IGT1 ⁺	1	Gate Trigger Current	VD=6V, RL=10Ω			30	mA
IGT1 ⁻	2					30	
IGT3 ⁺	3					—	
IGT3 ⁻	4					30	
VGT1 ⁺	1	Gate Trigger Voltage				1.5	V
VGT1 ⁻	2					1.5	
VGT3 ⁺	3					—	
VGT3 ⁻	4					1.5	
VGD	Non-Trigger Gate Voltage		Tj=125℃, VD=½VDRM	0.2			V
(dv/dt)c	Critical Rate of Rise of Off-State Voltage at Commutation		Tj=125℃, [di/dt]c=—12.5A/ms, VD=⅔VDRM	10			V/μs
IH	Holding Current				35		mA
Rth	Thermal Resistance		Junction to case			1.4	℃/W

Trigger mode of the triac

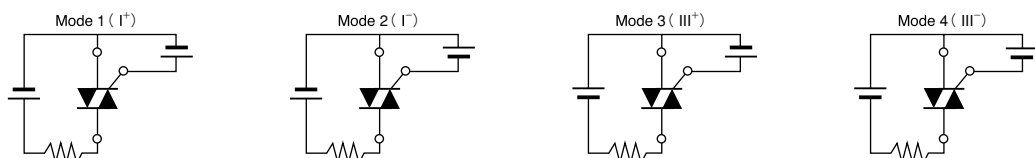


TMG25C60J


Gate Characteristics

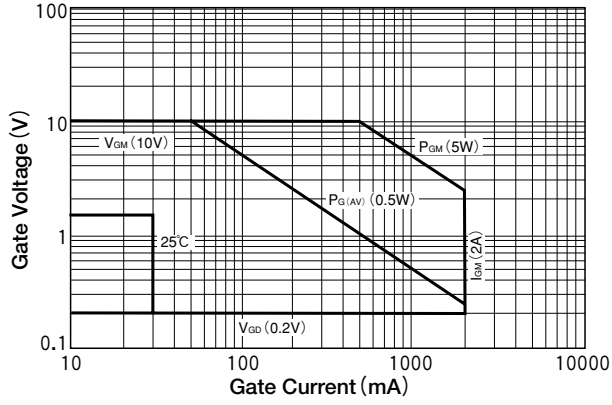


On-State Characteristics (MAX)

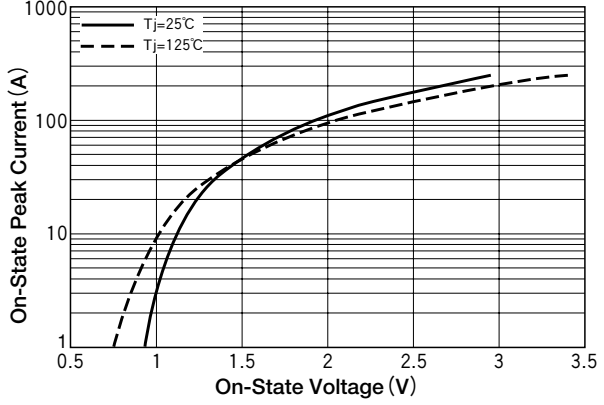


RMS On-State Current vs Maximum Power Dissipation

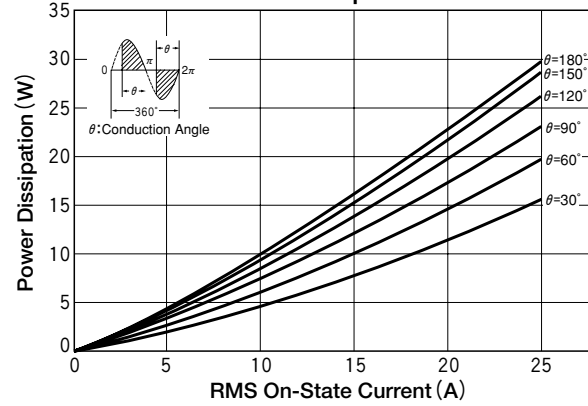


RMS On-State vs Allowable Case Temperature

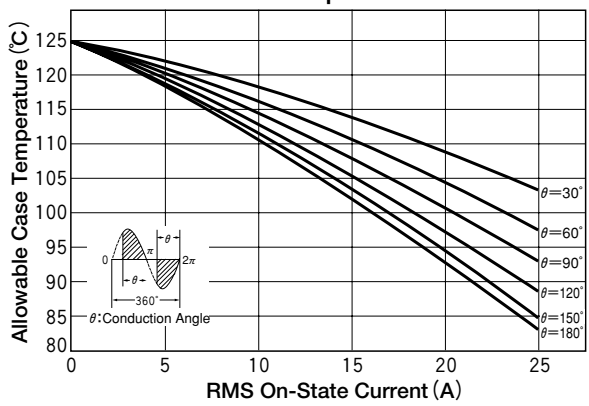


Surge On-State Current Rating (Non-Repetitive)

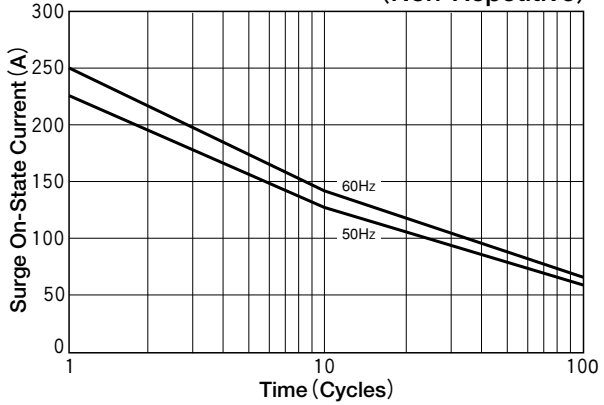

Transient Thermal Impedance

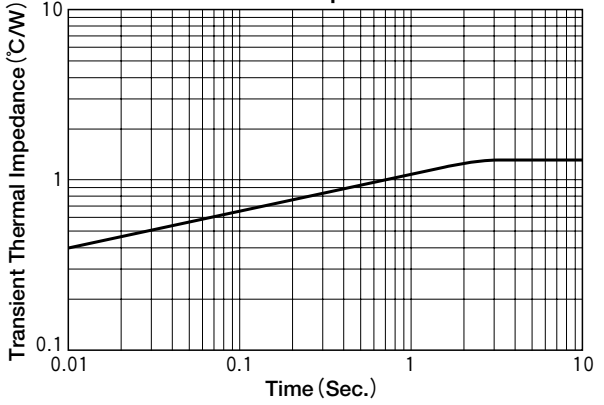

$I_{GT} - T_J$ (Typical)

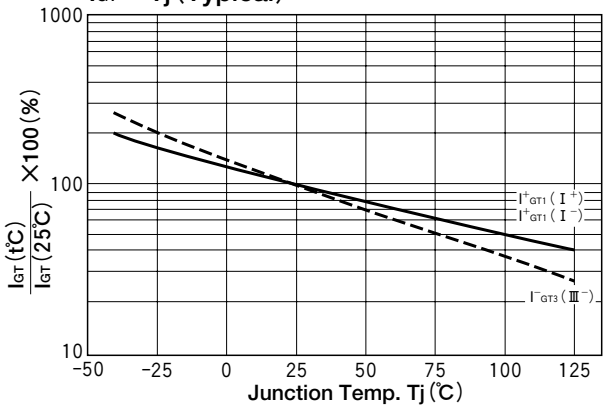

$V_{GT} - T_J$ (Typical)

