

TRIAC(Through Hole/Non-isolated)

TMG3CQ60C

(T_j=150°C)


SanRex Triac **TMG3CQ60C** is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

Features

- I_{T(RMS)}=3A
- High Surge Current
- Low Voltage Drop
- Lead-Free Package

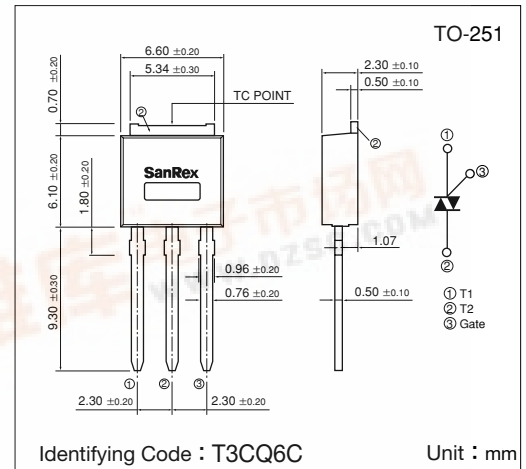

Maximum Ratings


(T_j=25°C unless otherwise specified)

Symbol	Item	Reference	Ratings	Unit
V _{DRM}	Repetitive Peak Off-State Voltage		600	V
I _{T(RMS)}	R.M.S. On-State Current	T _c =136°C	3	A
I _{TSM}	Surge On-State Current	One cycle, 50Hz/60Hz, Peak value non-repetitive	27/30	A
I _{ft}	I _{ft} (for fusing)		3.7	A ² S
P _{GM}	Peak Gate Power Dissipation		1.5	W
P _{G(AV)}	Average Gate Power Dissipation		0.1	W
I _{GM}	Peak Gate Current		1	A
V _{GM}	Peak Gate Voltage		7	V
T _j	Operating Junction Temperature		-40~+150	°C
T _{stg}	Storage Temperature		-40~+150	°C
	Mass		0.39	g


Electrical Characteristics

Symbol	Item	Reference	Ratings			Unit	
			Min.	Typ.	Max.		
I _{DRM}	Repetitive Peak Off-State Current	V _D =V _{DRM} , Single phase, half wave, T _J =150°C			1	mA	
V _{TM}	Peak On-State Voltage	I _T =4.5A, Inst. measurement			1.4	V	
I _{GT1} ⁺	1Gate Trigger Current	V _D =6V, R _L =10Ω			15	mA	
I _{GT1} ⁻			2				15
I _{GT3} ⁺			3				—
I _{GT3} ⁻			4				15
V _{GT1} ⁺	1Gate Trigger Voltage				1.5	V	
V _{GT1} ⁻			2				1.5
V _{GT3} ⁺			3				—
V _{GT3} ⁻			4				1.5
V _{GD}	Non-Trigger Gate Voltage	T _J =150°C, V _D =½V _{DRM}	0.1			V	
[dv/dt] _c	Critical Rate of Rise of Off-State Voltage at Commutation	T _J =150°C, [di/dt] _c =-1.5A/ms, V _D =⅔V _{DRM}	1			V/μs	
I _H	Holding Current			2		mA	
R _{th(j-c)}	Thermal Resistance	Junction to case			3.8	°C/W	
R _{th(j-a)}		Junction to ambient			60		


Trigger mode of the triac

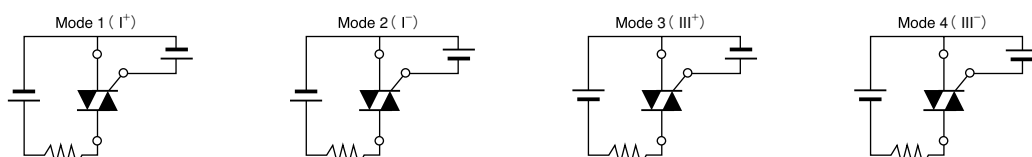


Gate Characteristics

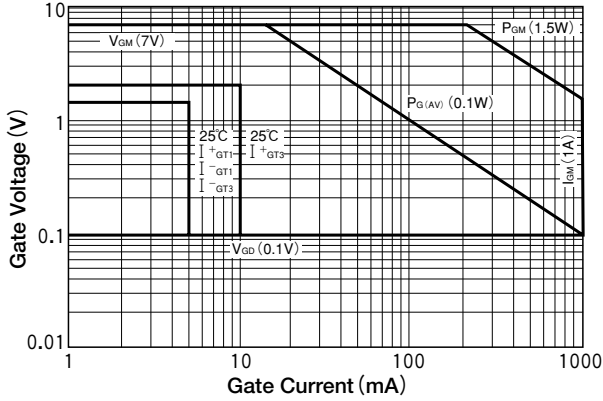


On-State Characteristics (MAX)

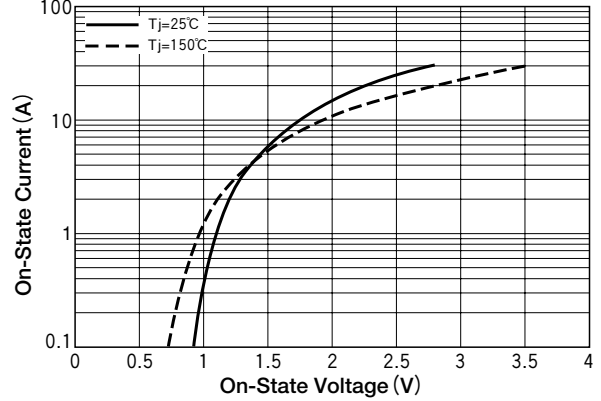


RMS On-State Current vs Maximum Power Dissipation

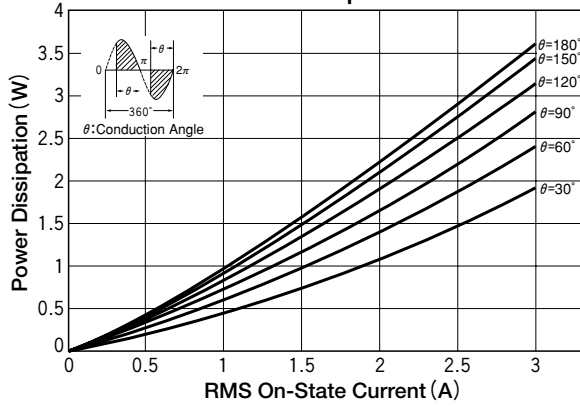


RMS On-State vs Allowable Case Temperature

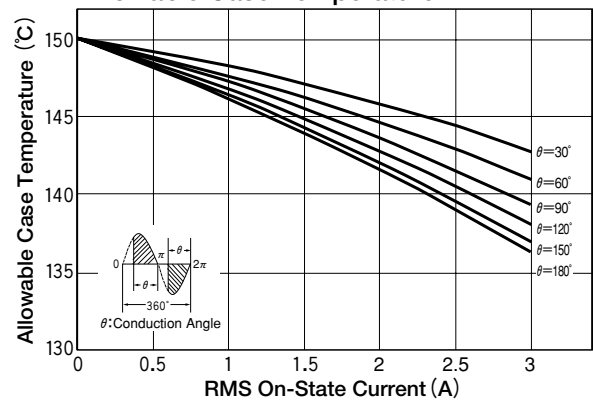


Surge On-State Current Rating (Non-Repetitive)

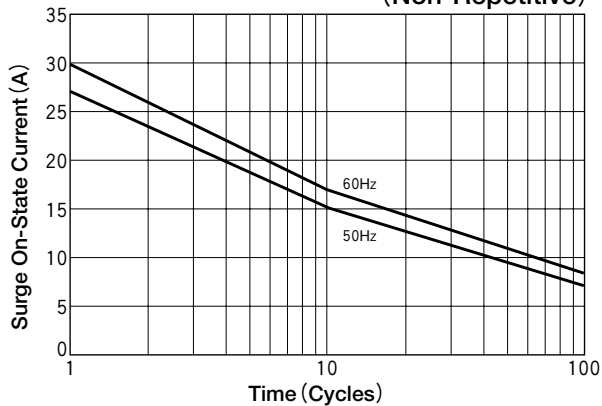

Transient Thermal Impedance

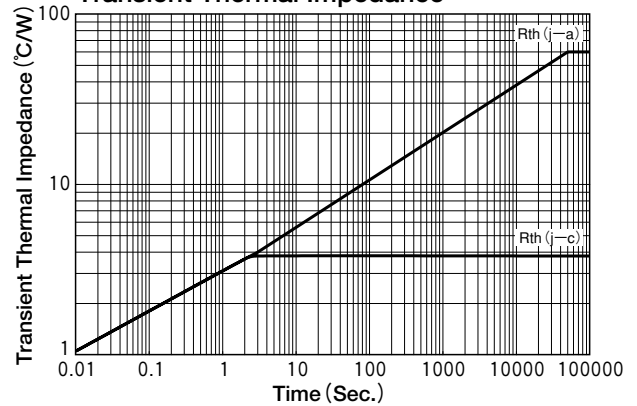

IGT — Tj (Typical)

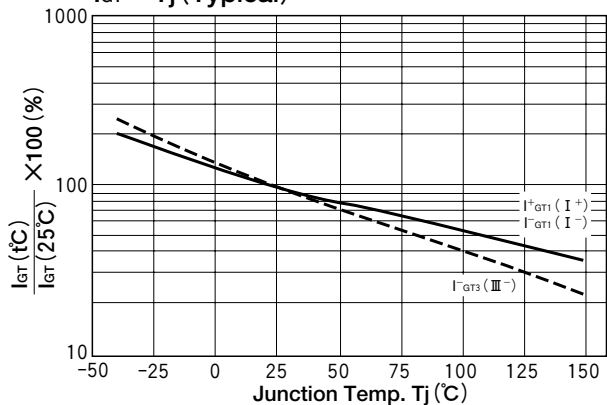

VGT — Tj (Typical)

