

TRIAC(Surface Mount Device / Non-isolated)

TMG5D60H

(Sensitive Gate)


SanRex Triac **TMG5D60H** is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

Features

- $I_T(RMS)=5A$
- High Surge Current
- Low Voltage Drop
- Lead-Free Package

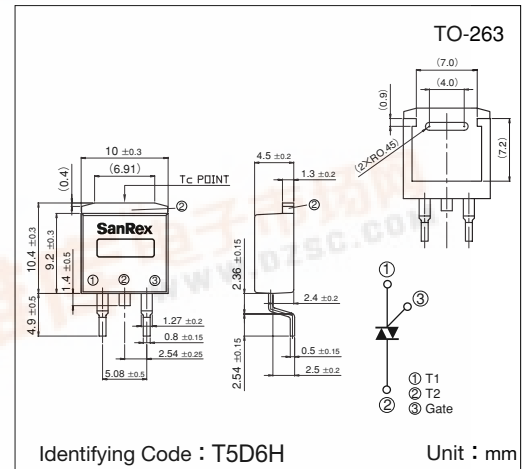

Maximum Ratings





(Tj=25°C unless otherwise specified)

Symbol	Item	Reference	Ratings	Unit
V_{DRM}	Repetitive Peak Off-State Voltage		600	V
$I_T(RMS)$	R.M.S. On-State Current	$T_c=107^\circ C$	5	A
I_{TSM}	Surge On-State Current	One cycle, 50Hz/60Hz, Peak value non-repetitive	50/55	A
I^2t	I^2t (for fusing)		12.6	A ² S
P_{GM}	Peak Gate Power Dissipation		3	W
$P_{G(AV)}$	Average Gate Power Dissipation		0.3	W
I_{GM}	Peak Gate Current		2	A
V_{GM}	Peak Gate Voltage		10	V
T_j	Operating Junction Temperature		-40~+125	°C
T_{stg}	Storage Temperature		-40~+150	°C
	Mass		1.2	g

Electrical Characteristics


Symbol	Item	Reference	Ratings			Unit
			Min.	Typ.	Max.	
IDRM	Repetitive Peak Off-State Current	$V_D=V_{DRM}$, Single phase, half wave, $T_j=125^{\circ}C$			1	mA
VTM	Peak On-State Voltage	$I_T=7A$, Inst. measurement			1.4	V
I_{GT1}^{+}	Gate Trigger Current	$V_D=6V$, $R_L=10\Omega$			10	mA
I_{GT1}^{-}					10	
I_{GT3}^{+}					—	
I_{GT3}^{-}					10	
V_{GT1}^{+}	Gate Trigger Voltage				1.5	V
V_{GT1}^{-}					1.5	
V_{GT3}^{+}					—	
V_{GT3}^{-}					1.5	
VGD	Non-Trigger Gate Voltage	$T_j=125^{\circ}C$, $V_D=\frac{1}{2}V_{DRM}$	0.2			V
$[dv/dt]_c$	Critical Rate of Rise of Off-State Voltage at Commutation	$T_j=125^{\circ}C$, $[di/dt]_c=-2.5A/ms$, $V_D=\frac{2}{3}V_{DRM}$	5			$V/\mu s$
IH	Holding Current			10		mA
Rth(j-c)	Thermal Resistance	Junction to case			3.0	$^{\circ}C/W$

Trigger mode of the triac




TMG5D60H


Gate Characteristics

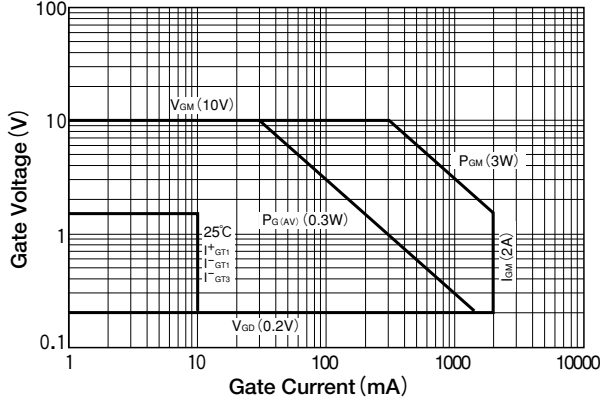


On-State Characteristics (MAX)

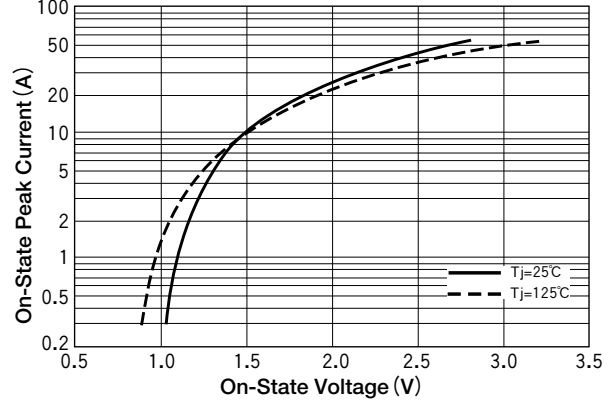


RMS On-State Current vs Maximum Power Dissipation

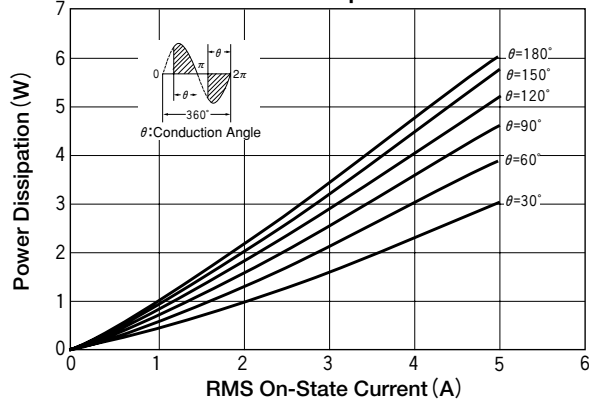


RMS On-State vs Allowable Case Temperature

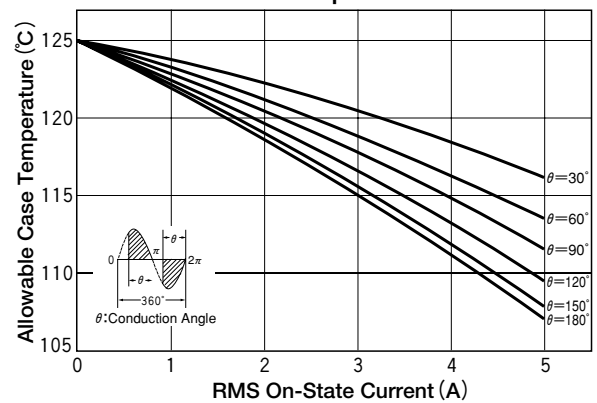


Surge On-State Current Rating (Non-Repetitive)

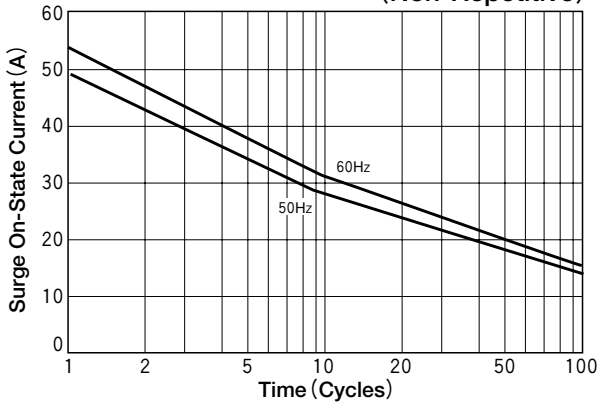

Transient Thermal Impedance

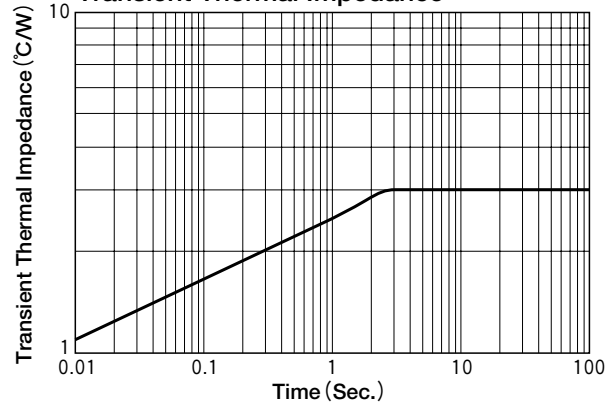

$I_{GT} - T_J$ (Typical)

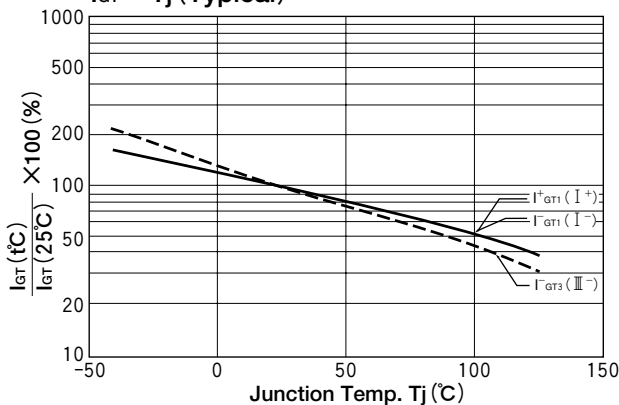

$V_{GT} - T_J$ (Typical)

