



TN0201L/0401L, VN0300L/LS

Vishay Siliconix

N-Channel 20-, 30-, 40-V (D-S) MOSFETs

PRODUCT SUMMARY				
Part Number	V _{(BR)DSS} Min (V)	r _{DS(on)} Max (Ω)	V _{GS(th)} (V)	I _D (A)
TN0201L	20	1.2 @ V _{GS} = 10 V	0.5 to 2	0.64
TN0401L	40	1.2 @ V _{GS} = 10 V	0.5 to 2	0.64
VN0300L	30	1.2 @ V _{GS} = 10 V	0.8 to 2.5	0.64
VN0300LS	30	1.2 @ V _{GS} = 10 V	0.8 to 2.5	0.67

FEATURES


- Low On-Resistance: 0.85 Ω
- Low Threshold: 1.4 V
- Low Input Capacitance: 38 pF
- Fast Switching Speed: 9 ns
- Low Input and Output Leakage

BENEFITS

- Low Offset Voltage
- Low-Voltage Operation
- Easily Driven Without Buffer
- High-Speed Circuits
- Low Error Voltage

APPLICATIONS

- Direct Logic-Level Interface: TTL/CMOS
- Drivers: Relays, Solenoids, Lamps, Hammers, Displays, Memories, Transistors, etc.
- Battery Operated Systems
- Solid-State Relays



Top View

TN0201L
TN0401L
VN0300L

Device Marking Front View

TN0201L

"S" TN
0201L
xxyy

TN0401L


"S" TN
0401L
xxyy

VN0300L

"S" VN
0300L
xxyy

"S" = Silicon Logo
xxyy = Date Code

TO-92S (Copper Lead Frame)



Top View

VN0300LS

Device Marking Front View

VN0300LS

"S" VN
0300LS
xxyy

"S" = Silicon Logo
xxyy = Date Code

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C UNLESS OTHERWISE NOTED)

Parameter	Symbol	TN0201L	TN0401L	VN0300L	VN0300LS	Unit	
Drain-Source Voltage	V _{DS}	20	40	30	30	V	
Gate-Source Voltage	V _{GS}	±20	±20	±30	±30	V	
Continuous Drain Current (T _J = 150°C)	I _D	T _A = 25°C	0.64	0.64	0.64	0.67	A
		T _A = 100°C	0.38	0.38	0.38	0.43	
Pulsed Drain Current ^a	I _{DM}	1.5	1.5	3	3	A	
Power Dissipation	P _D	T _A = 25°C	0.8	0.8	0.8	0.9	W
		T _A = 100°C	0.32	0.32	0.32	0.4	
Thermal Resistance, Junction-to-Ambient	R _{thJA}	156	156	156	156	°C/W	
Operating Junction and Storage Temperature Range	T _J , T _{stg}	-55 to 150				°C	

Notes:
a. Pulse width limited by maximum junction temperature.

TN0201L/0401L, VN0300L/LS

Vishay Siliconix



SPECIFICATIONS (T _A = 25 °C UNLESS OTHERWISE NOTED)									
Parameter	Symbol	Test Conditions	Typ ^a	Limits				Unit	
				TN0201L TN0401L		VN0300L VN0300LS			
				Min	Max	Min	Max		
Static									
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0 V I _D = 10 μA	TN0201L	55	20				V
			TN0401L	55	40			30	
Gate-Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 0.25 mA	1.4	0.5	2				
		V _{DS} = V _{GS} , I _D = 1 mA	1.5			0.8	2.5		
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20 V			±10			nA	
		V _{DS} = 0 V, V _{GS} = ±30 V					±100		
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 30 V, V _{GS} = 0 V	T _J = 125 °C				10	μA	
						500			
		V _{DS} = 0.8 × V _{(BR)DSS} , V _{GS} = 0 V			1				
On-State Drain Current ^b	I _{D(on)}	V _{DS} = 10 V, V _{GS} = 4.5 V	0.9	0.25				A	
		V _{DS} = 10 V, V _{GS} = 10 V	3.5	1		1			
Drain-Source On-Resistance ^b	r _{DS(on)}	V _{GS} = 3.5 V, I _D = 0.05 A	1.8		4			Ω	
		V _{GS} = 5 V, I _D = 0.3 A	1.2			3.3			
		V _{GS} = 4.5 V, I _D = 0.25 A	1.4		2				
		T _J = 125 °C	2.6		4				
		V _{GS} = 10 V, I _D = 1 A	0.85		1.2		1.2		
	T _J = 125 °C	1.6				2.4			
Forward Transconductance ^b	g _{fs}	V _{DS} = 10 V, I _D = 0.5 A	500	200		200		mS	
Dynamic									
Input Capacitance	C _{iss}	V _{DS} = 15 V, V _{GS} = 0 V, f = 1 MHz	38		60		100	pF	
Output Capacitance	C _{oss}		33		50		95		
Reverse Transfer Capacitance	C _{rss}		8		15		25		
Switching^c									
Turn-On Time	t _{ON}	V _{DD} = 15 V, R _L = 14 Ω I _D ≅ 1 A, V _{GEN} = 10 V R _G = 25 Ω	10		30		30	ns	
Turn-Off Time	t _{OFF}		13		30		30		







Notes

- a. For DESIGN AID ONLY, not subject to production testing..
- b. Pulse test: PW ≤ 300 μs duty cycle ≤ 2%.
- c. Switching time is essentially independent of operating temperature.

VNDQ03



TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

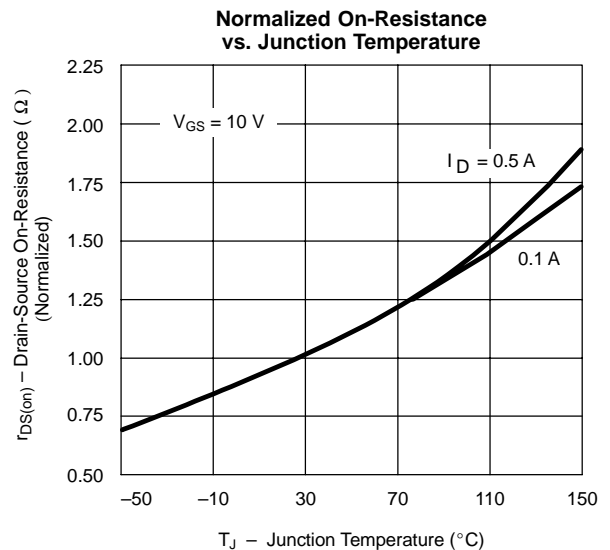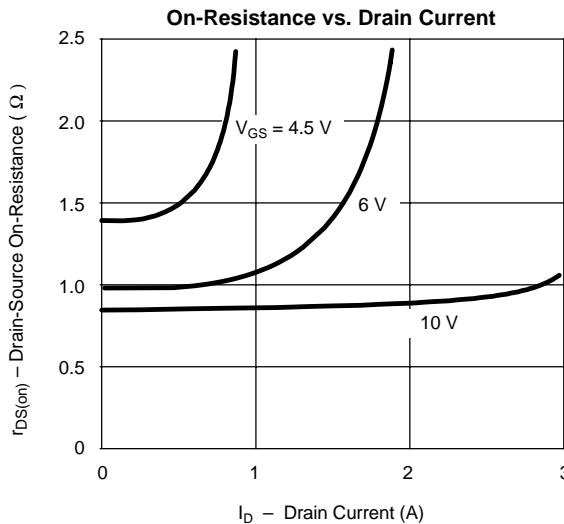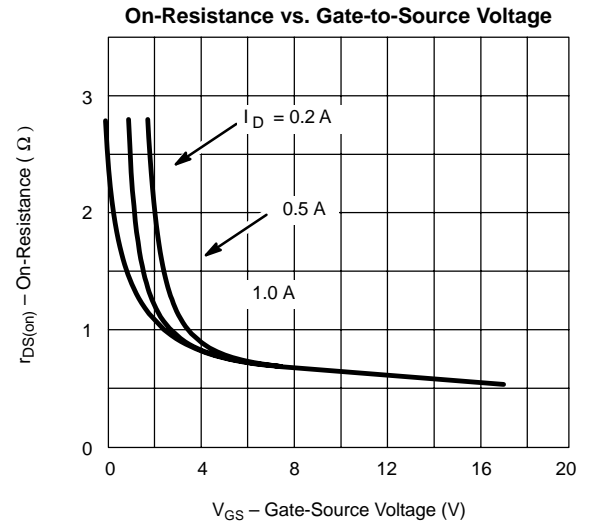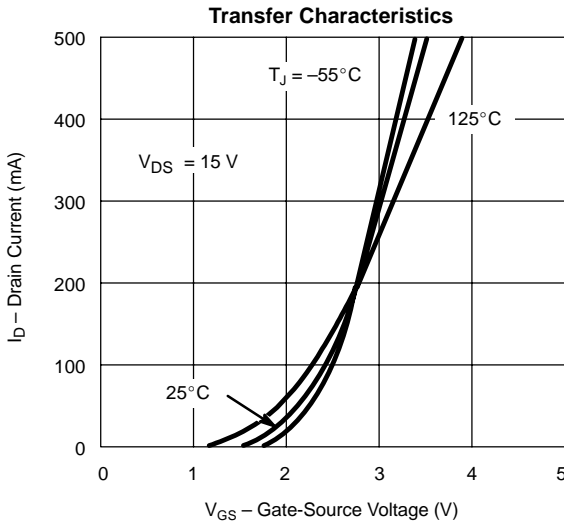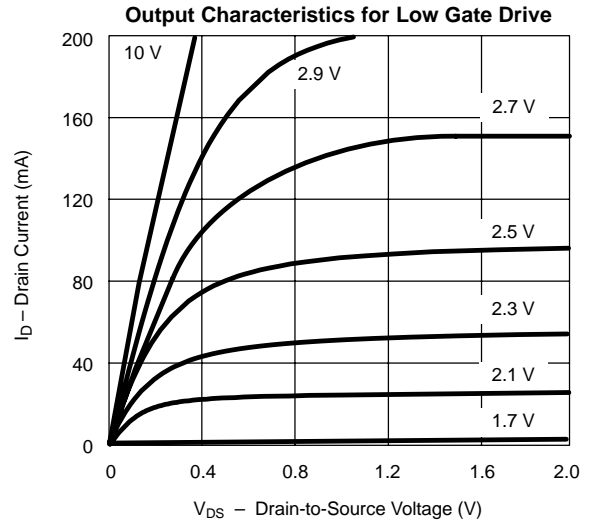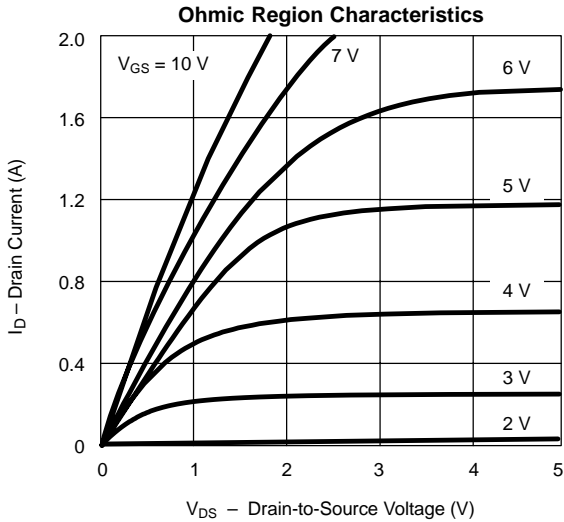



TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

