

TRACO POWER

Open Frame Power Supplies

TOL Series

10 - 300 Watt

Features

- Small and compact PCB Construction
- Optional with Chassis and Cover
- Universal Input 85–264 VAC,
- Output Voltage adjustable
- Compliance to EN 61000-3-2 (PFC)
- EMI meets EN55022, Class B and FCC, Level B
- Short Circuit and Overvoltage Protection
- International Safety Standards
- Industrial Quality Standard
- 2 Year Product Warranty



The TOL Series switching power supplies are the best choice for many space critical applications. They feature ultra-compact dimensions and a low profile.

As an accessory a chassis and cover kit for self-installation is available for all models. To make installation even more simple, prewired mating output/ input connectors with flying leads are also offered as an accessory. Compliance with international safety standards (CE / UL) and EMC specifications qualify this product for worldwide use. A very high reliability is guaranteed by the use of industrial quality grade components and excellent thermal management..

Models

Order Code	Output Power	Output Voltage	Output Current max.
TOL 10-05	10 Watt	5 VDC	2 A
TOL 10-12		12 VDC	0.9 A
TOL 10-24		24 VDC	0.5 A
TOL 15-05	15 Watt	5 VDC	3 A
TOL 15-12		12 VDC	1.3 A
TOL 15-24		24 VDC	0.6 A
TOL 30-05	30 Watt	5 VDC	6 A
TOL 30-12		12 VDC	2.5 A
TOL 30-24		24 VDC	1.3 A
TOL 50-05	50 Watt	5 VDC	10 A
TOL 50-12		12 VDC	4.3 A
TOL 50-24F		24 VDC	2.2 A (peak 3.0 A)*
TOL 75-05	75 Watt	5 VDC	15 A
TOL 75-12		12 VDC	6.3 A
TOL 75-24F		24 VDC	3.2 A (peak 4.5 A)*
TOL 100-05	100 Watt	5 VDC	20 A
TOL 100-12		12 VDC	8.5 A
TOL 100-24F		24 VDC	4.5 A (peak 6.3 A)*
TOL 100-48		48 VDC	2.1 A
TOL 150-05	150 Watt	5 VDC	30 A
TOL 150-12		12 VDC	13 A
TOL 150-24F		24 VDC	6.5 A (peak 9.1 A)*
TOL 150-48		48 VDC	3.3 A
TOL 300-24	300 Watt	24 VDC	14 A
TOL 300-48		48 VDC	6.3 A

* Peak current for max. 10sec

Input Specifications

Input voltage range	85 – 264 VAC
Input frequency	47 – 63 Hz
Inrush current at 25°C (< 2ms)	15 A max. (Vin 120 VAC) 30 A max. (Vin 230 VAC)

Output Specifications

Output voltage adjustment range		± 10 %
Regulation	– Input variation	0.5 % max.
	– Load variation (10 – 100%)	0.8 % max.
Ripple and noise (20Mhz Bandwidth)	5VDC output models:	100 mV pp max.
	12 / 24VDC output models:	180 mV pp max.
	48VDC output models:	300 mV pp max. (TOL 300: 600mV pp max)
Output current limitation (except for F versions)		105% – 140% of Inom.
Short circuit protection	– 10 to 30 Watt models:	hiccup mode, indefinite (automatic recovery)
	– 50 to 300 Watt models:	constant current (automatic recovery)
Overvoltage protection		115 – 135 % Vout nom.
Capacitive load	– TOL10	10'000 µF max. (24 Vout model: 2'000 µF)
	– TOL15	15'000 µF max. (24 Vout model: 6'000 µF)
	– other models	18'000 µF max.

General Specifications

Temperature ranges	– Operating (ambient temp.) – Derating above 50°C – Storage (non operating)	–10 °C...+60°C (TOL150: –10°C...+50°C) 3 % / °C (TOL150: 1.5 % / °C above 35°C) –20 °C...+ 75 °C
Temperature coefficient		0.02 % / °C
Efficiency		75 % typ.
Humidity (non condensing)		20 % – 90 % rel.
Switching frequency		100 kHz typ. (PWM)
Hold-up time		20 ms typ. at full load
Isolation voltage	– Input / output – Input / FG (or case) – Output / FG (or case)	3'000 VAC for 1min. 2'000 VAC for 1min. 500 VDC for 1min.
Isolation resistance		100 MOhm
Leakage current		0.6 mA RMS typ. / 230 VAC / 60 Hz
Electromagnetic compatibility (EMC) Emission	– Conducted input RI suppression – Harmonic current emissions	EN 55022, class B; FCC Part 15, level B IEC / EN 61000-3-2, class A
Electromagnetic compatibility (EMC) Immunity	– Electrostatic discharge – Surge immunity	IEC / EN 61000-4-2 8kV / 15kV IEC / EN 61000-4-5 2kV / 4kV

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications

Safety standards	EN 60950, UL /cUL 1950 File E188913	
Reliability, calculated MTBF (MIL-HDBK-217E)	– TOL10 / TOL15:	> 650'000 h @ 25 °C
	– TOL30:	> 500'000 h @ 25 °C
	– TOL50 / TOL75:	> 375'000 h @ 25 °C
	– TOL100 / TOL150:	> 350'000 h @ 25 °C
	TOL300:	> 260'000 h @ 25 °C
Remote ON / OFF	On:	5 VDC (input resistance 1 KOhm)
(available as option for models TOL30 / 50 / 75 / 100 / 150 / 300)	Off:	0V or open circuit
Remote sensing	– without sens line:	previred connector included
(only TOL300 models)	– with sens line:	use Molex housing / pin 67260-0400 / 67260 to connect sens line at P54
Vibration	IEC 60068-2-6, 5-10 Hz with 10mm amplitude 2 gn, 60 sweeps of 10-55 Hz, each axis	
Shock resistance	IEC 60068-2-27, 20 gn each axis	

Mating Connectors with prewired flying Leads (500mm Length)

OrderCode	Description	Pin no.	Wire Color	Cross-Section	AWG
TOL-C31	Input cable for all models	1	black	0.75mm ²	18
		3	white	0.75mm ²	18
		5	green	0.75mm ²	18
TOL-C41	TOL 10/15 output cable	1–2	black	0.4 mm ²	22
		3–4	red	0.4 mm ²	22
TOL-C42	TOL 30/50 output cable	1–2	black	0.75 mm ²	18
		3–4	red	0.75 mm ²	18
TOL-C61	TOL 75 output cable	1–3	black	0.4 mm ²	22
		4–6	red	0.4 mm ²	22
TOL-C62	TOL 150 output cable +	1–6	red	0.4 mm ²	22
TOL-C71	TOL 150 output cable –	1–7	black	0.4 mm ²	22
TOL-C81	TOL 100 output cable	1–4	black	0.4 mm ²	22
		5–8	red	0.4 mm ²	22

Chassis / Cover Kit

Order Code	For Models
TOL 10-MC	TOL 10-xx
TOL 15-MC	TOL 15-xx
TOL 30-MC	TOL 30-xx
TOL 50-MC	TOL 50-xx
TOL 75-MC	TOL 75-xx
TOL 100-MC	TOL 100-xx
TOL 150-MC	TOL 150-xx
TOL 300-MC	TOL 300-xx

Mating Connectors

For Connection	Molex Housing / Pin
P1 – all models	51144-0500 / 50539
P51 – TOL10/15	67261-0400 / 67260
P51 – TOL30/50	51144-0400 / 50539
P51 – TOL75/150	51144-0600 / 50539
P51 – TOL100	51144-0800 / 50539
P52 – TOL150	51144-0700 / 50539
P52/53 remote on/off	67261-0200 / 67260
P54 – TOL300 sens	67260-0400 / 67260

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

One Power Supply - 3 Mounting Variations

TOL Standard open Frame Version



TOL open Frame with L - Bracket for Chassis Mounting



TOL with L - Bracket and Cover (Chassis / Cover Kit)




Mating Connectors with prewired flying Leads (500mm Length)




Outline Dimensions mm (inches)

TOL 10 standard open frame version

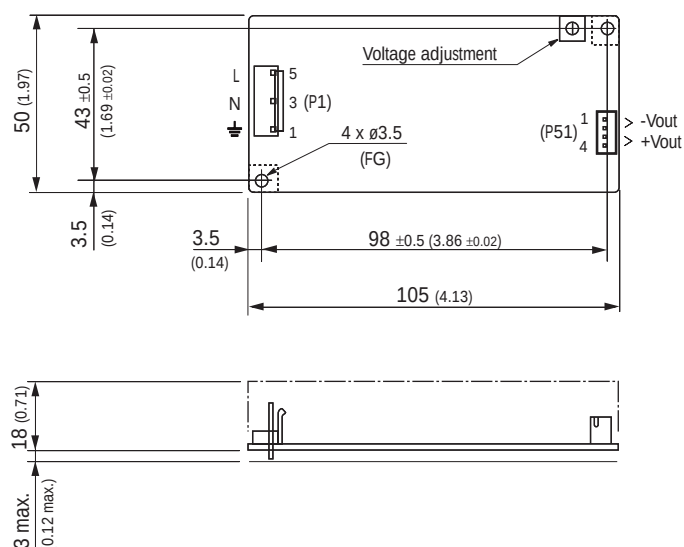

Weight
75 g (2.6 oz)


TOL 10 with chassis / cover option

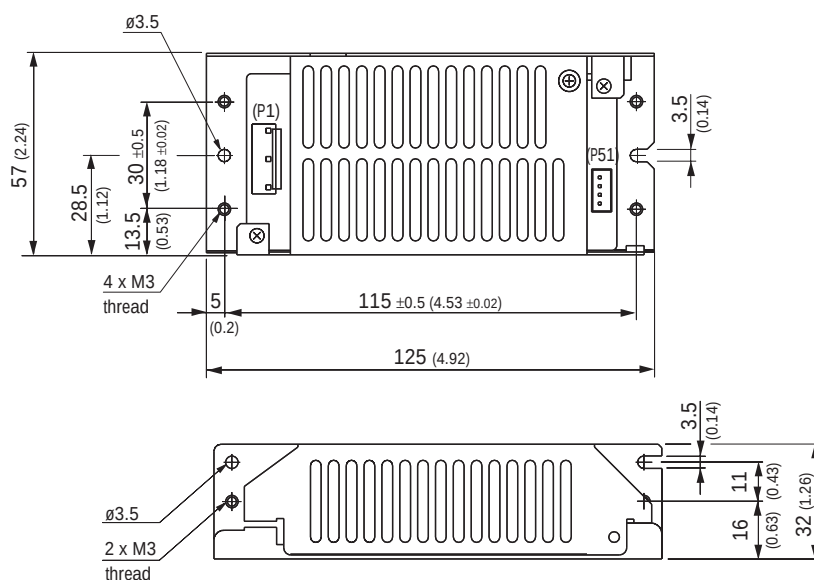

Weight
170 g (17.6 oz)


Outline Dimensions mm (inches)

TOL 15 standard open frame version

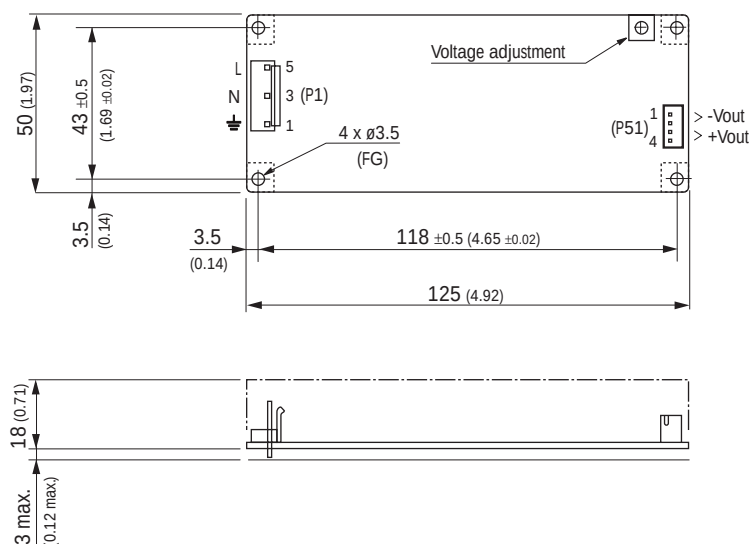

Weight
95 g (3.4 oz)


TOL 15 with chassis / cover option

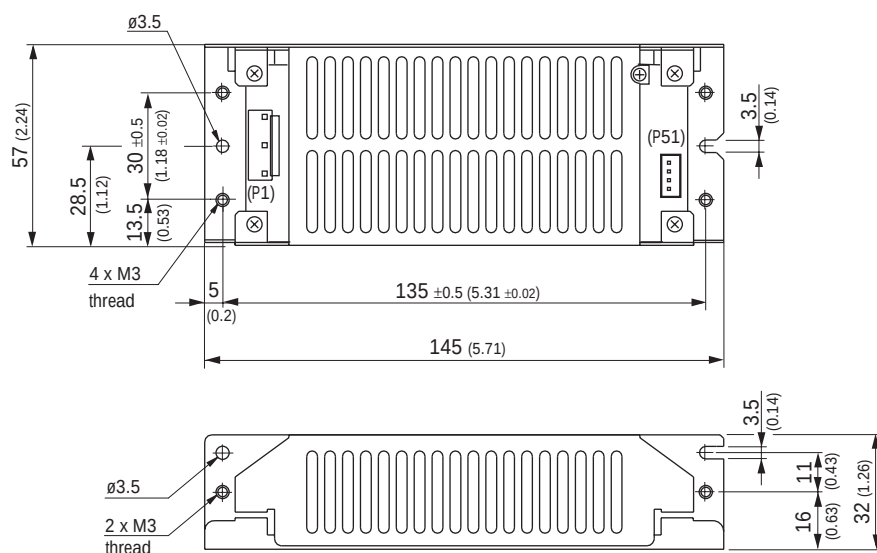

Weight
210 g (7.4 oz)


Outline Dimensions mm (inches)

TOL 30 standard open frame version

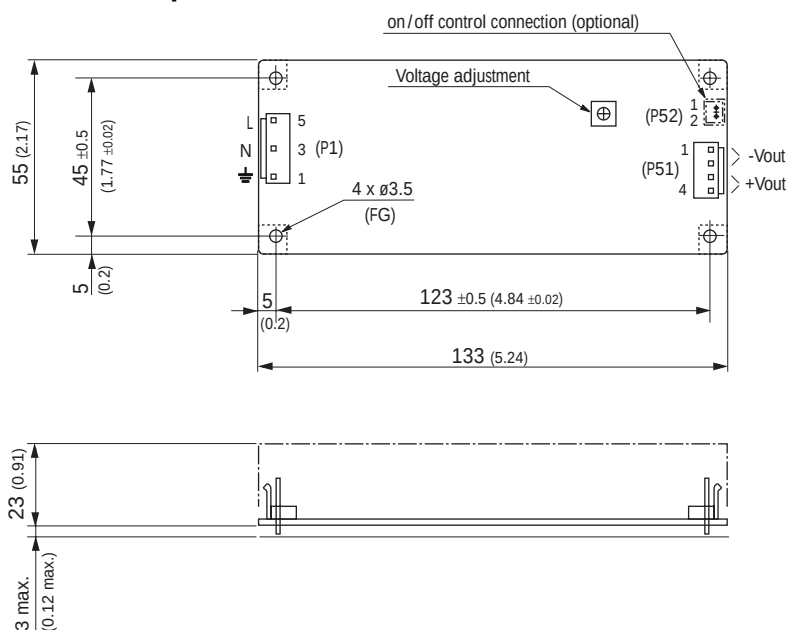

Weight
200 g (7.1 oz)


TOL 30 with chassis / cover option

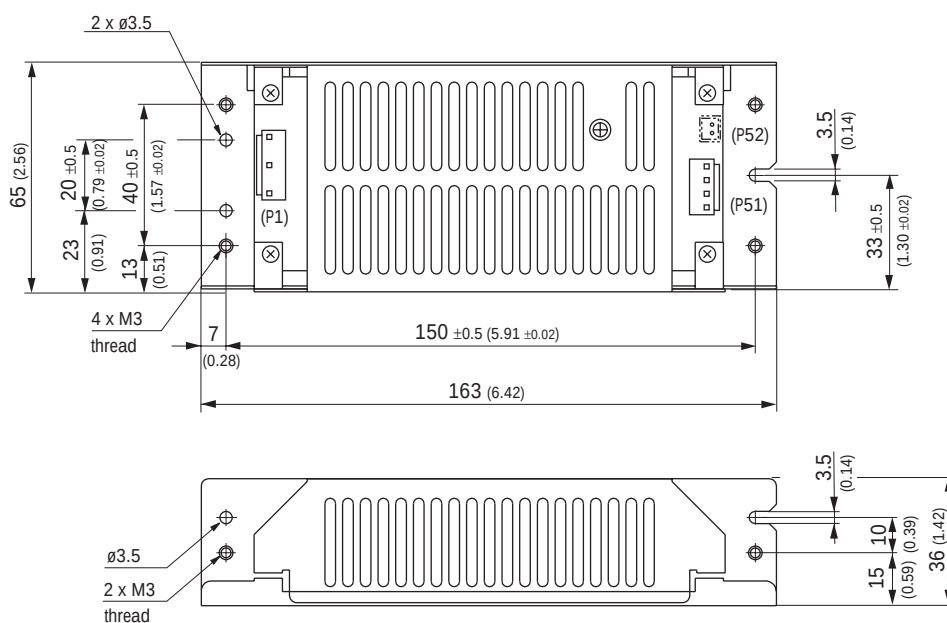

Weight
280 g (9.9 oz)


Outline Dimensions mm (inches)

TOL 50 standard open frame version

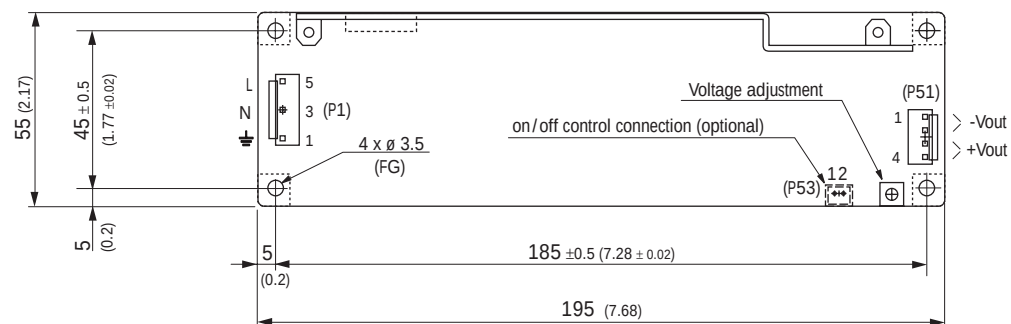

Weight
210 g (7.4 oz)


TOL 50 with chassis / cover option

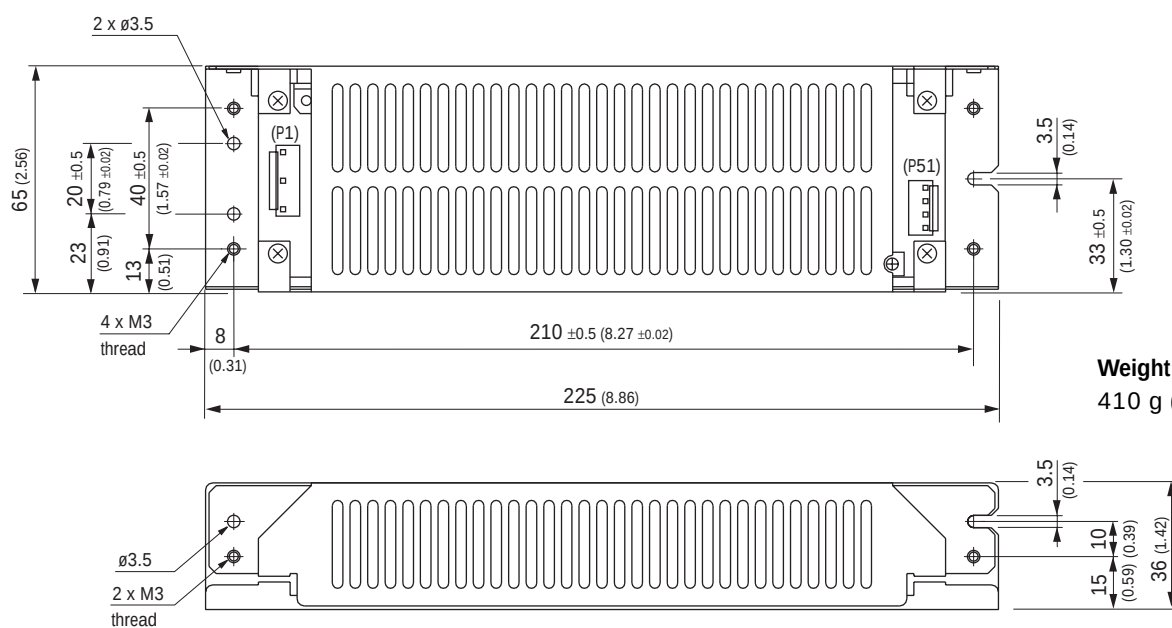

Weight
410 g (14.5 oz)


Outline Dimensions mm (inches)

TOL 75 standard open frame version

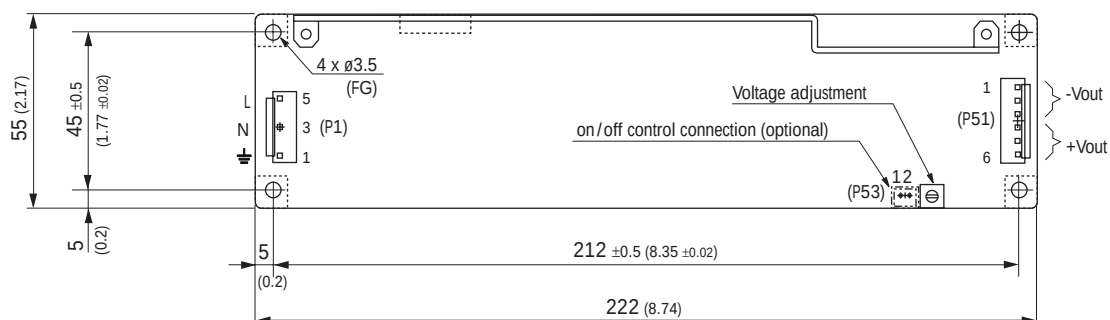

Weight
290 g (10.2 oz)


TOL 75 with chassis / cover option

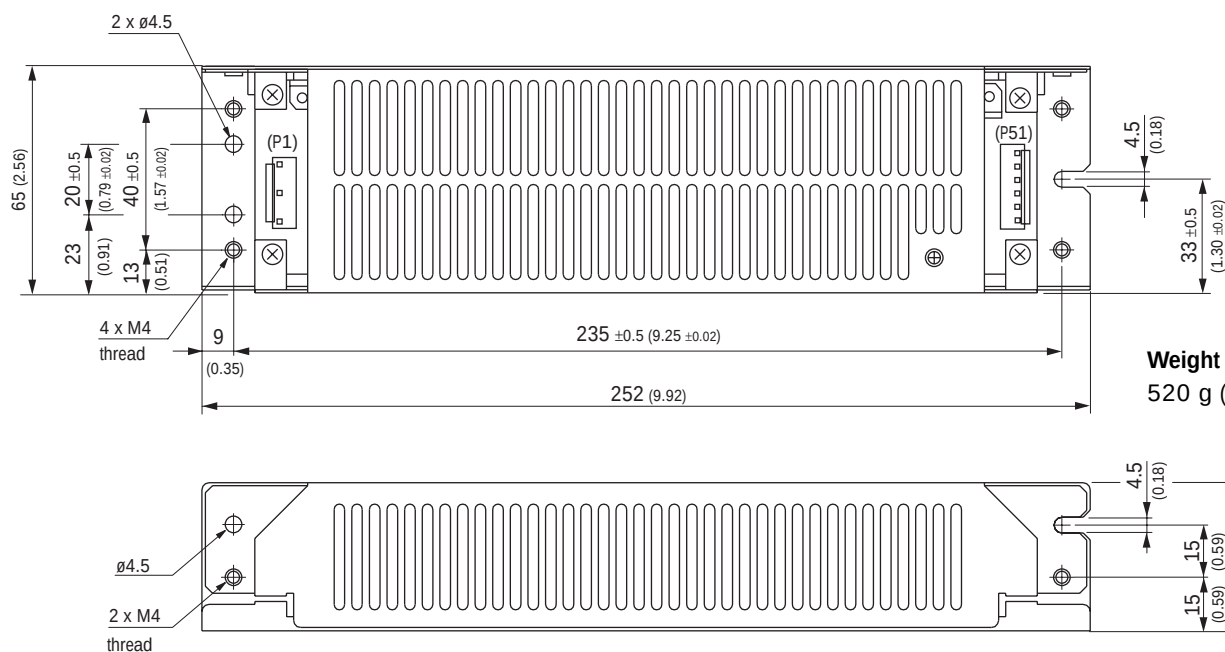


Weight
520 g (18.3 oz)

Outline Dimensions mm (inches)

TOL 100 standard open frame version

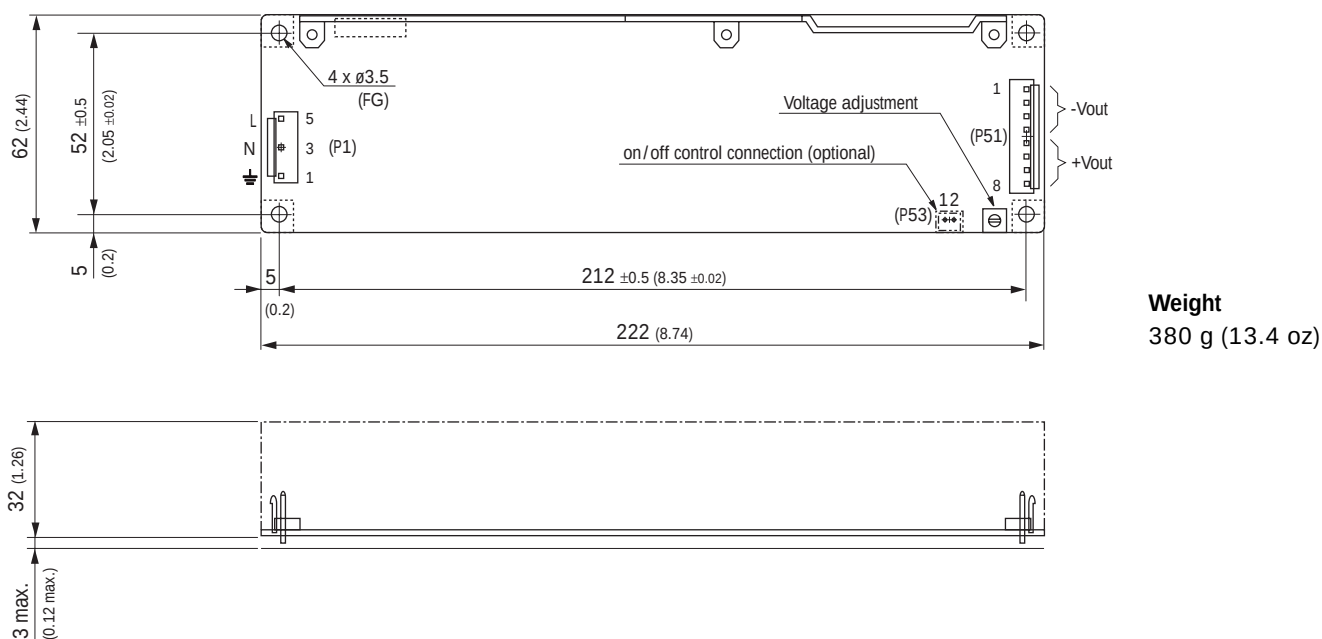


TOL 100 with chassis / cover option

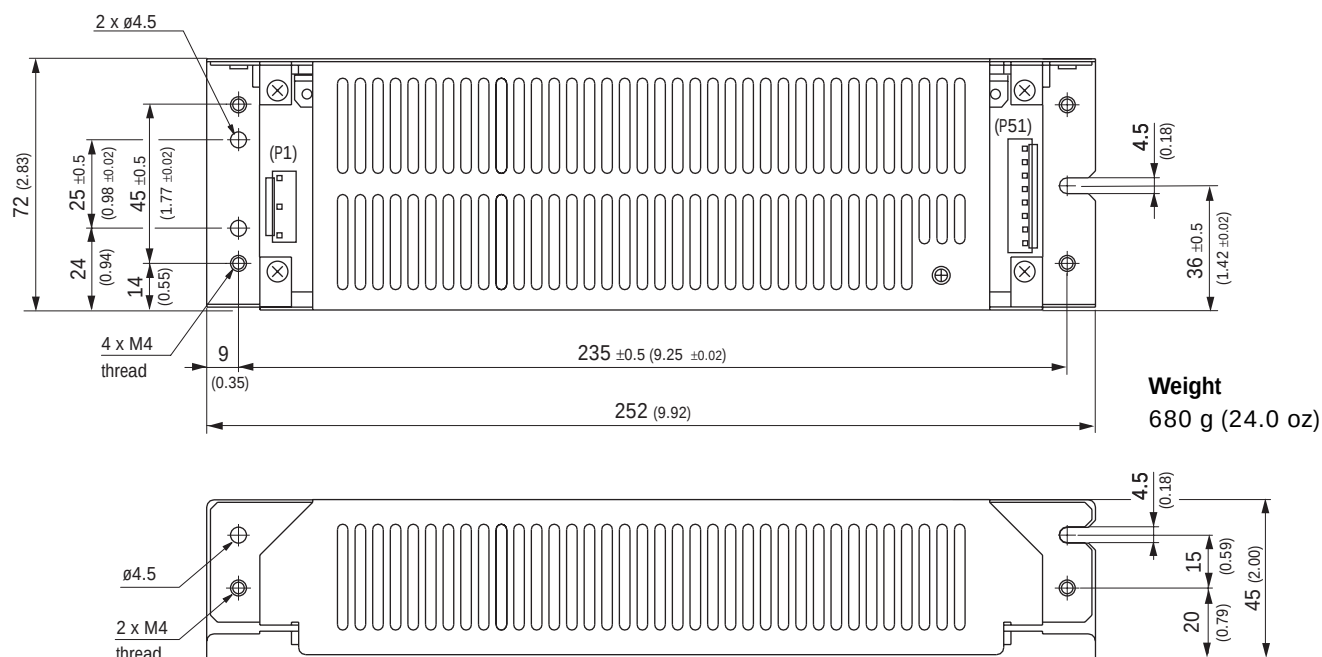


Outline Dimensions mm (inches)

TOL 150 standard open frame version

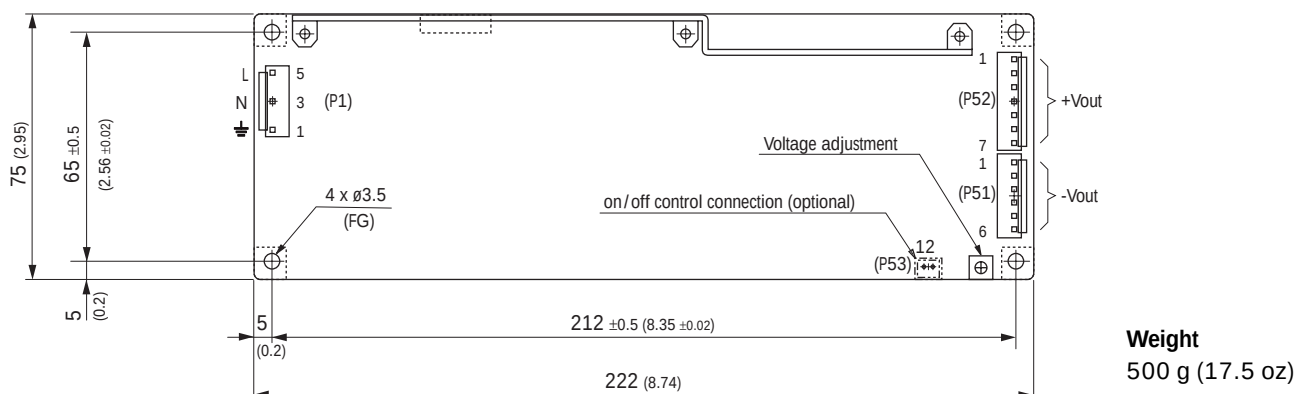


TOL 150 with chassis / cover option

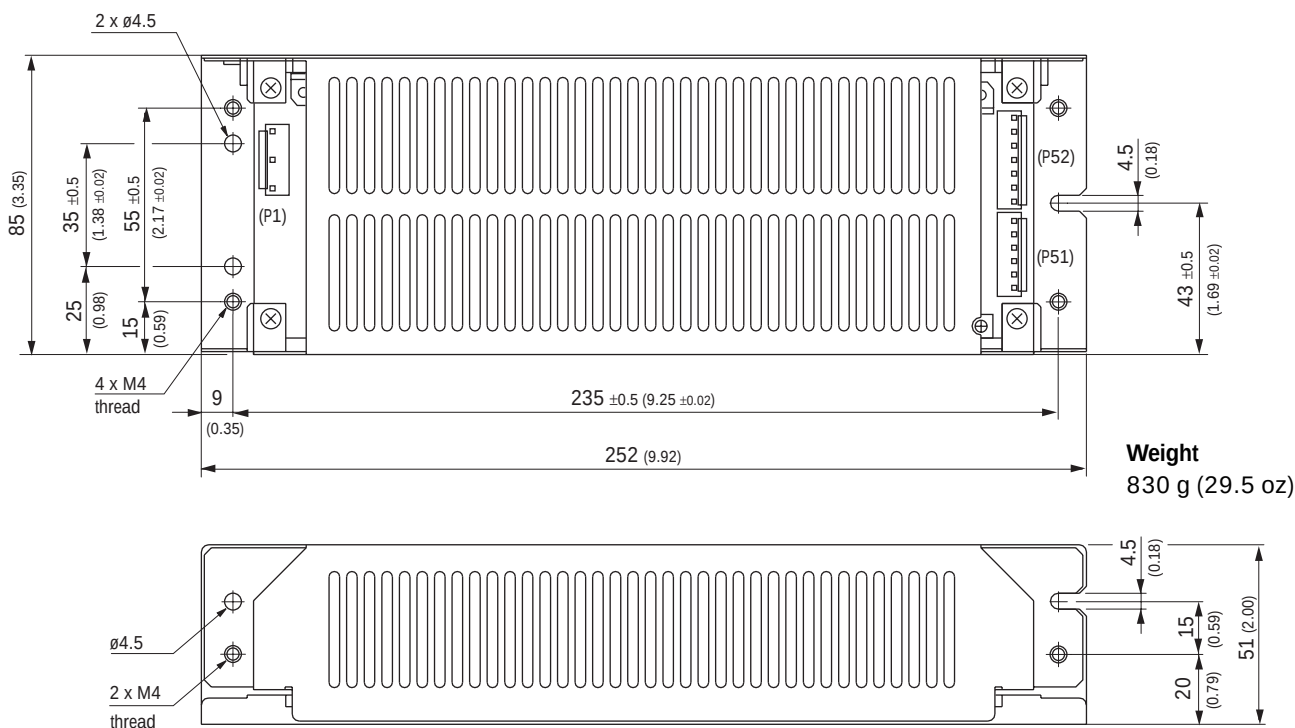


Outline Dimensions mm (inches)

TOL 300 standard open frame version

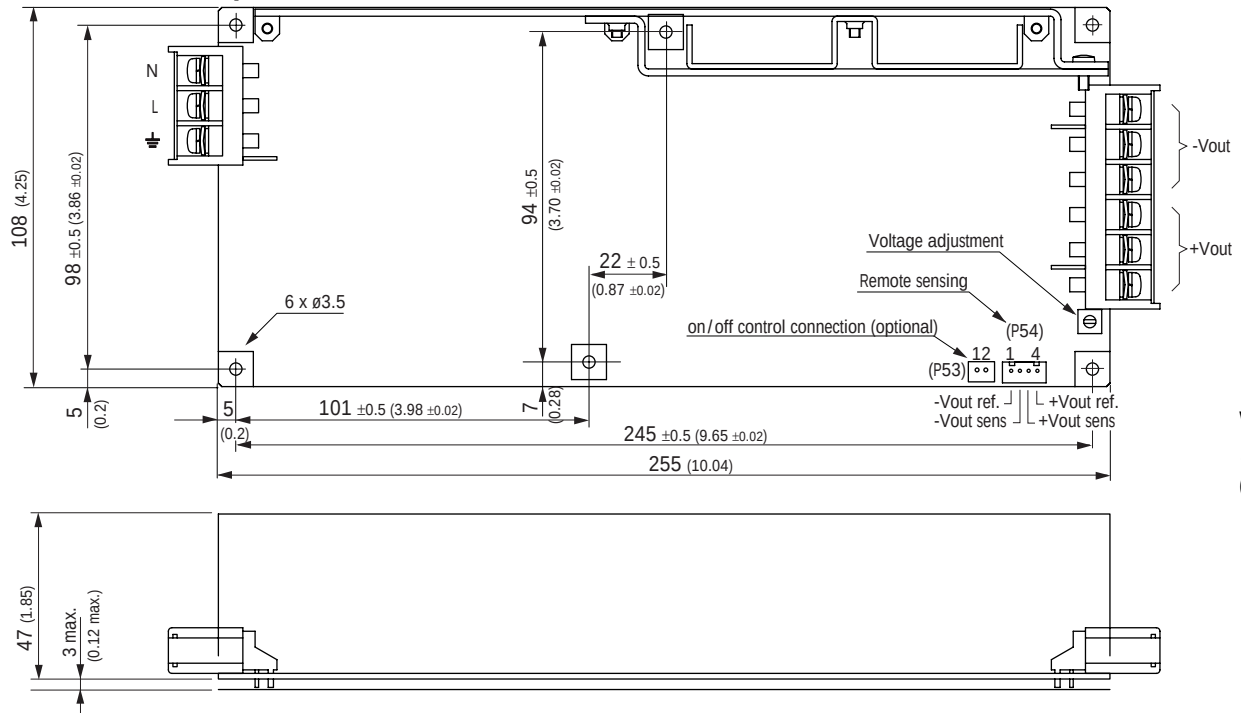

Weight
1000 g
(35 oz)

TOL 300 with chassis / cover option

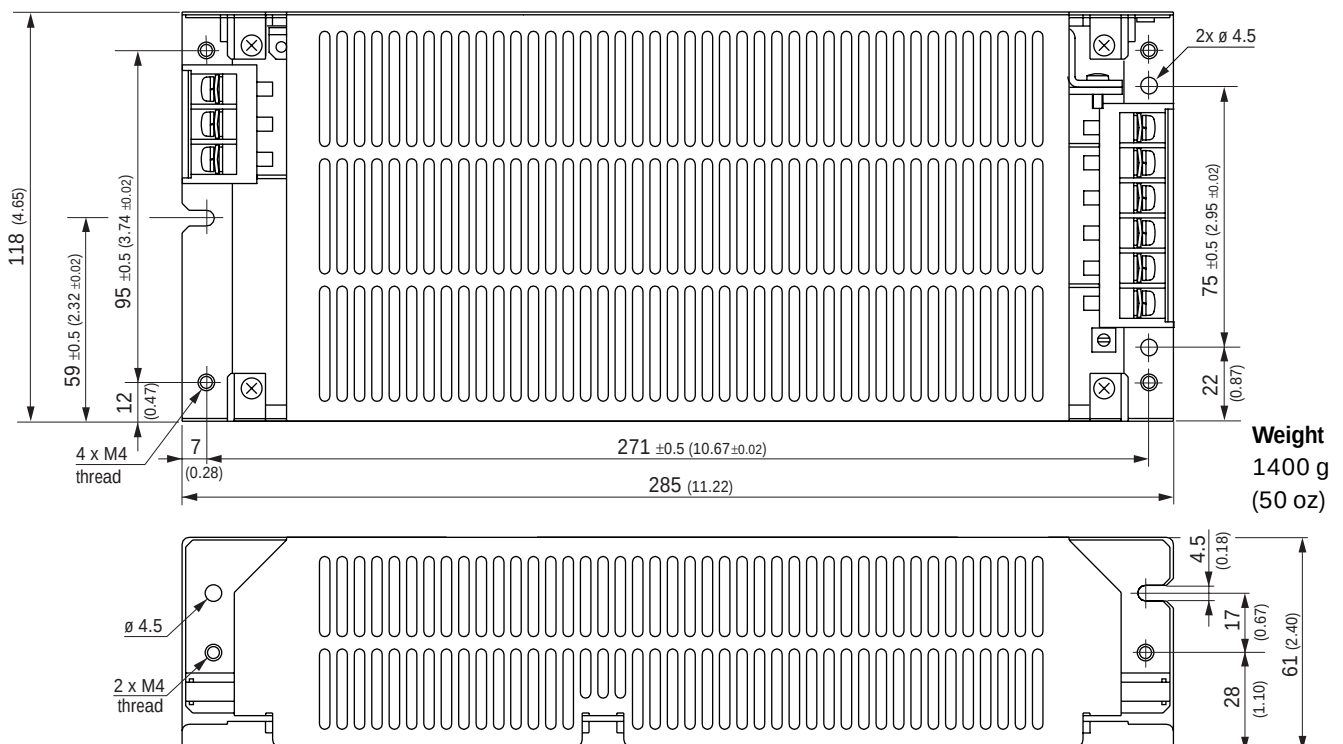

Weight
1400 g
(50 oz)

Specifications can be changed without notice