



TP2314

# NPN SILICON HIGH FREQUENCY TRANSISTOR


## DESCRIPTION:

The **TP2314** is a High Frequency Transistor Designed for Large Signal Power Amplifier Applications, With Emitter Grounded to Case.

## MAXIMUM RATINGS

<b>I</b>	1.0 A
<b>V</b>	18 V
<b>P<sub>DISS</sub></b>	8.0 W @ T <sub>C</sub> = 25 °C
<b>T<sub>J</sub></b>	-65 °C to +200 °C
<b>T<sub>STG</sub></b>	-65 °C to +200 °C
<b>q<sub>JC</sub></b>	22 °C/W

## PACKAGE STYLE TO-39 (CE)

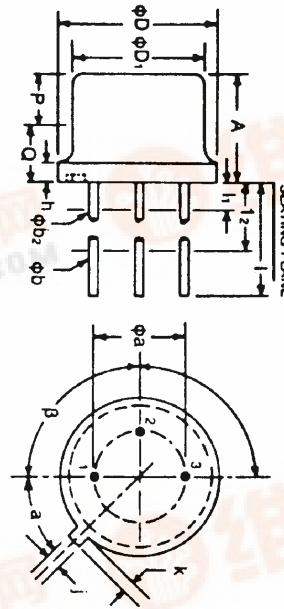

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN.	MAX.	MIN.	MAX.
$\phi a$	0.190	0.210	4.83	5.33
A	0.240	0.260	6.10	6.60
$\phi b$	0.016	0.021	0.406	0.533
$\phi b_2$	0.016	0.019	0.406	0.483
$\phi D$	0.350	0.370	8.89	9.40
$\phi D_1$	0.315	0.335	8.00	8.51
h	0.009	0.125	0.229	3.18
j	0.028	0.034	0.711	0.864
k	0.029	0.040	0.737	1.02
l	0.500		12.70	
$l_1$		0.050		1.27
$l_2$	0.250		6.35	
P	0.100		2.54	
Q				
a	45° NOMINAL			
$\beta$	90° NOMINAL			

1 = COLLECTOR      2 = BASE  
3 = EMITTER

## CHARACTERISTICS T<sub>C</sub> = 25 °C

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
<b>BV<sub>CEO</sub></b>	I <sub>C</sub> = 10 mA	18			V
<b>BV<sub>CES</sub></b>	I <sub>C</sub> = 5.0 mA	36			V
<b>BV<sub>CBO</sub></b>	I <sub>C</sub> = 5.0 mA	36			V
<b>I<sub>CBO</sub></b>	V <sub>CB</sub> = 15 V			250	mA
<b>BV<sub>EBO</sub></b>	I <sub>E</sub> = 1.0 mA	4.0			V
<b>h<sub>FE</sub></b>	V <sub>CE</sub> = 5.0 V      I <sub>C</sub> = 250 mA	5.0			---
<b>C<sub>ob</sub></b>	V <sub>CB</sub> = 15 V      f = 1.0 MHz			20	pF
<b>G<sub>PE</sub> h</b>	V <sub>CC</sub> = 12.5 V      P <sub>out</sub> = 40 W      f = 175 MHz	50		0.1	W %

