



**TRANSYS  
ELECTRONICS  
LIMITED**

## TS200R THRU T S2010R

FAST SWITCHING PLASTIC RECTIFIER

VOLTAGE - 50 to 1000 Volts CURRENT - 2.0 Amperes

### FEATURES

- High current capability
- Plastic package has Underwriters Laboratory
- Flammability Classification 94V-0 utilizing
- Flame Retardant Epoxy Molding Compound
- 2.0 ampere operation at  $T_A=55^\circ\text{C}$  with no thermal runaway
- Exceeds environmental standards of MIL-S-19500/228
- Fast switching for high efficiency
- Low leakage

DO-15

### MECHANICAL DATA


Case: Molded plastic, DO-15

Terminals: Plated axial leads, solderable per MIL-STD-202,  
Method 208

Polarity: Color band denotes cathode

Mounting Position: Any

Weight: 0.015 ounce, 0.4 gram

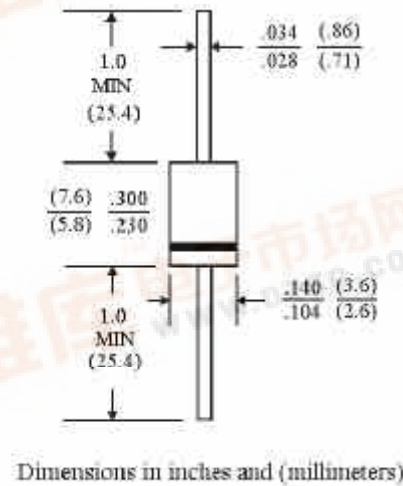

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at  $25^\circ\text{C}$  ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

|                                                                                                                                | TS200R      | TS201R | TS202R | TS204R | TS206R | TS208R | S2010R | UNITS                            |
|--------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|--------|--------|--------|----------------------------------|
| Peak Reverse Voltage, Repetitive; $V_{RM}$ :                                                                                   | 50          | 100    | 200    | 400    | 600    | 800    | 1000   | V                                |
| Maximum RMS Voltage                                                                                                            | 35          | 70     | 140    | 280    | 420    | 560    | 700    | V                                |
| Maximum DC Blocking Voltage                                                                                                    | 50          | 100    | 200    | 400    | 600    | 800    | 1000   | V                                |
| Maximum Average Forward Rectified Current .375" (9.5mm) Lead Length at $T_A=55^\circ\text{C}$                                  | 2.0         |        |        |        |        |        |        | A                                |
| Peak Forward Surge Current, $I_{FM}$ (surge)<br>8.3msec. single half sine-wave<br>superimposed on rated load<br>(JEDEC method) | 70.0        |        |        |        |        |        |        | A                                |
| Maximum Forward Voltage at 2.0A DC                                                                                             | 1.3         |        |        |        |        |        |        | V                                |
| Maximum Reverse Current $T_J=25^\circ\text{C}$<br>at Rated DC Blocking Voltage $T_J=100^\circ\text{C}$                         | 5.0<br>500  |        |        |        |        |        |        | $\mu\text{gA}$<br>$\mu\text{gA}$ |
| Typical Junction capacitance (Note 1) $C_J$                                                                                    | 35          |        |        |        |        |        |        | pF                               |
| Typical Thermal Resistance (Note 3) $R_{\theta\text{KJA}}$                                                                     | 22          |        |        |        |        |        |        | $^\circ\text{C/W}$               |
| Maximum Reverse Recovery Time (Note 2)                                                                                         | 150         | 150    | 150    | 150    | 250    | 500    | 500    | ns                               |
| Operating and Storage Temperature Range<br>$T_J, T_{STG}$                                                                      | -55 TO +150 |        |        |        |        |        |        | $^\circ\text{C}$                 |

### NOTES:

- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
- Reverse Recovery Test Conditions:  $I_F=5A$ ,  $I_R=1A$ ,  $t_r=25A$
- Thermal Resistance from Junction to Ambient and from junction to lead at 0.375" (9.5mm) lead length P.C.B. mounted.



RATING AND CHARACTERISTIC CURVES

TS200R THRU T S2010R

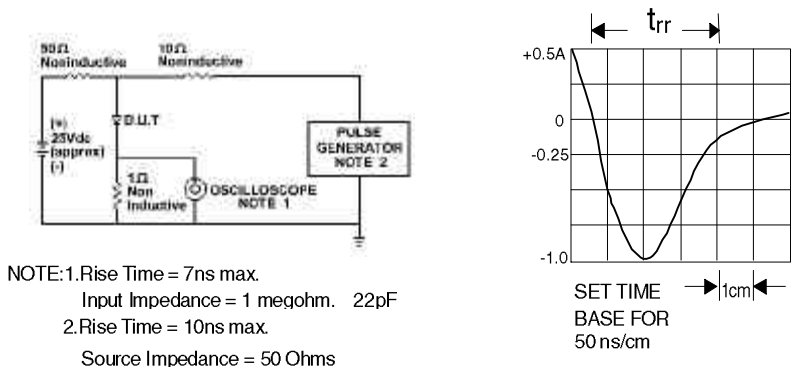


Fig. 1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

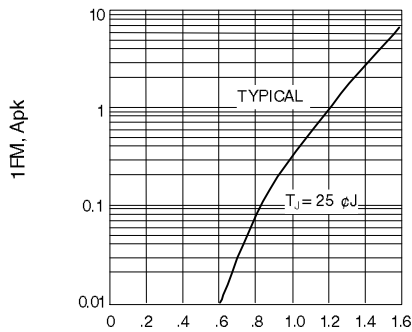


Fig. 2-FORWARD CHARACTERISTICS

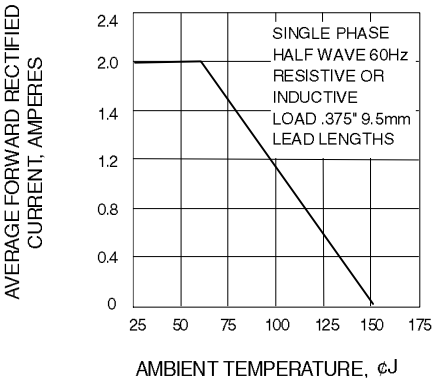


Fig. 3-FORWARD CURRENT DERATING CURVE

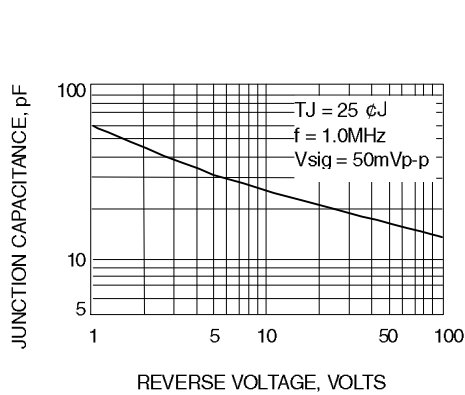


Fig. 4-TYPICAL JUNCTION CAPACITANCE

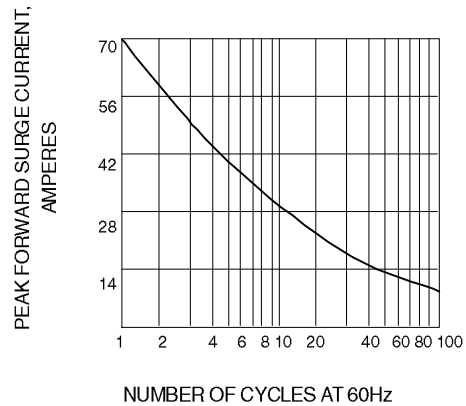


Fig. 5-PEAK FORWARD SURGE CURRENT