

	<h1>TSB1424A</h1> <h2>Low Vce(sat) PNP Transistor</h2>												
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p><b>SOT-89</b></p>  <p>1 2 3</p> </div> <div style="text-align: center;"> <p><b>SOT-223</b></p>  <p>1 2 3</p> </div> </div> <p>Pin assignment:</p> <ol style="list-style-type: none"> <li>1. Base</li> <li>2. Collector</li> <li>3. Emitter</li> </ol>	<p><b>BV<sub>CEO</sub> = - 50V</b>  <b>I<sub>C</sub> = - 3A</b>  <b>V<sub>CE</sub> (SAT), = - 0.35V(typ.) @I<sub>C</sub> / I<sub>B</sub> = - 2A / - 0.1A</b></p>												
<p><b>Features</b></p> <ul style="list-style-type: none"> <li>◇ Low V<sub>CE</sub> (SAT).</li> <li>◇ Excellent DC current gain characteristics</li> </ul>	<p><b>Ordering Information</b></p> <table border="1"> <thead> <tr> <th>Part No.</th> <th>Packing</th> <th>Package</th> <th>Marking</th> </tr> </thead> <tbody> <tr> <td>TSB1424ACW</td> <td>2.5k per reel</td> <td>SOT-223</td> <td>AE</td> </tr> <tr> <td>TSB1424ACY</td> <td>1k per reel</td> <td>SOT-89</td> <td>AE</td> </tr> </tbody> </table>	Part No.	Packing	Package	Marking	TSB1424ACW	2.5k per reel	SOT-223	AE	TSB1424ACY	1k per reel	SOT-89	AE
Part No.	Packing	Package	Marking										
TSB1424ACW	2.5k per reel	SOT-223	AE										
TSB1424ACY	1k per reel	SOT-89	AE										
<p><b>Structure</b></p> <ul style="list-style-type: none"> <li>◇ Epitaxial planar type.</li> <li>◇ Complementary to TSD2150A</li> </ul>													

**Absolute Maximum Rating** (Ta = 25 °C unless otherwise noted)

Parameter	Symbol	Limit	Unit
Collector-Base Voltage	V <sub>CBO</sub>	- 50V	V
Collector-Emitter Voltage	V <sub>CEO</sub>	- 50V	V
Emitter-Base Voltage	V <sub>EBO</sub>	- 6	V
Collector Current	I <sub>C</sub>	DC	- 3
		Pulse	- 5
Collector Power Dissipation	P <sub>D</sub>	SOT-89	0.5
		SOT-223	1.5
Operating Junction Temperature	T <sub>J</sub>	+150	°C
Operating Junction and Storage Temperature Range	T <sub>STG</sub>	- 55 to +150	°C

Note: 1. Single pulse, Pw = 10mS, Duty <= 30%

Electrical Characteristics							
Ta = 25 °C unless otherwise noted							
Parameter	Conditions	Symbol	Min	Typ	Max	Unit	
<b>Static</b>							
Collector-Base Voltage	I <sub>C</sub> = - 50uA	BV <sub>CBO</sub>	- 50	--	--	V	
Collector-Emitter Breakdown Voltage	I <sub>C</sub> = - 1mA	BV <sub>CEO</sub>	- 50	--	--	V	
Emitter-Base Breakdown Voltage	I <sub>E</sub> = - 50uA	BV <sub>EBO</sub>	- 6	--	--	V	
Collector Cutoff Current	V <sub>CB</sub> = - 20V	I <sub>CBO</sub>	--	--	- 0.1	uA	
Emitter Cutoff Current	V <sub>EB</sub> = - 5V	I <sub>EBO</sub>	--	--	-0.1	uA	
Collector-Emitter Saturation Voltage	I <sub>C</sub> / I <sub>B</sub> = - 2A / - 0.1A	V <sub>CE(SAT)</sub>	--	-0.35	- 0.5	V	
DC Current Transfer Ratio	V <sub>CE</sub> = 2V, I <sub>C</sub> = 100mA	h <sub>FE</sub>	180	--	--		
	V <sub>CE</sub> = 2V, I <sub>C</sub> = 1A	h <sub>FE</sub>	180	--	560		
	V <sub>CE</sub> = 2V, I <sub>C</sub> = 2A	h <sub>FE</sub>	180	--	--		
Transition Frequency	V <sub>CE</sub> = - 2V, I <sub>C</sub> = - 500mA, f = 100MHz	f <sub>T</sub>	--	240	--	MHz	
Output Capacitance	V <sub>CB</sub> = - 10V, f=1MHz	Cob	--	35	--	pF	

Note : pulse test: pulse width <=380uS, duty cycle <=2%





## Electrical Characteristics Curve

Figure 1. Current Gain vs Collector Current

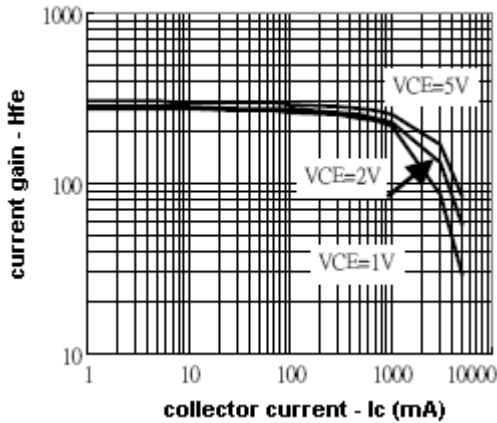


Figure 2. Saturation Voltage vs Collector Current

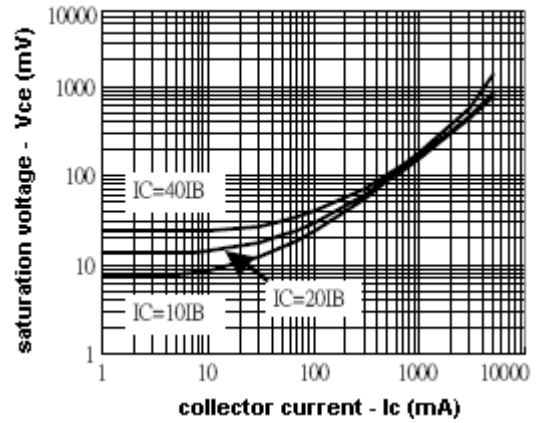


Figure 3. Saturation Voltage vs Collector Current



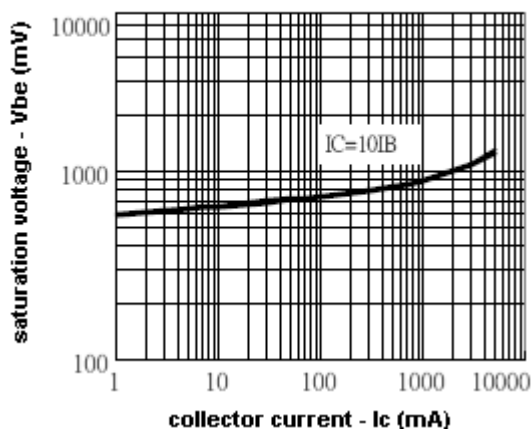


Figure 4. Power Derating Curves

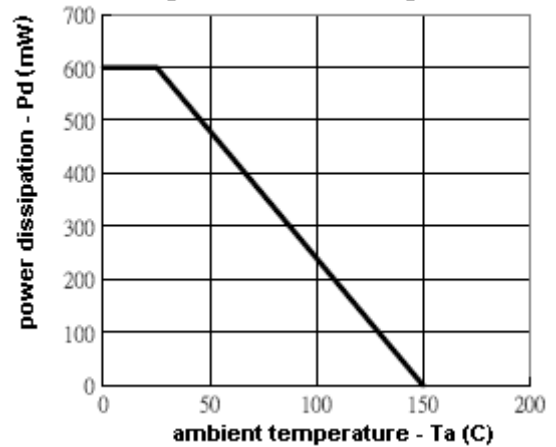


### SOT-89 Mechanical Drawing

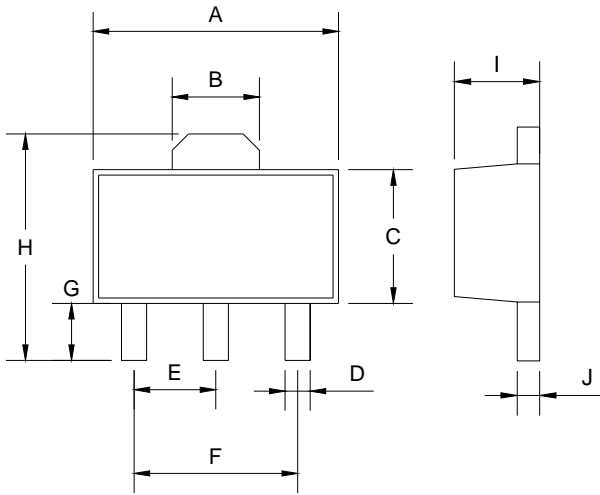

DIM	SOT-89 DIMENSION			
	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.40	4.60	0.173	0.181
B	1.50	1.7	0.059	0.070
C	2.30	2.60	0.090	0.102
D	0.40	0.52	0.016	0.020
E	1.50	1.50	0.059	0.059
F	3.00	3.00	0.118	0.118
G	0.89	1.20	0.035	0.047
H	4.05	4.25	0.159	0.167
I	1.4	1.6	0.055	0.068
J	0.35	0.44	0.014	0.017

### SOT-223 Mechanical Drawing

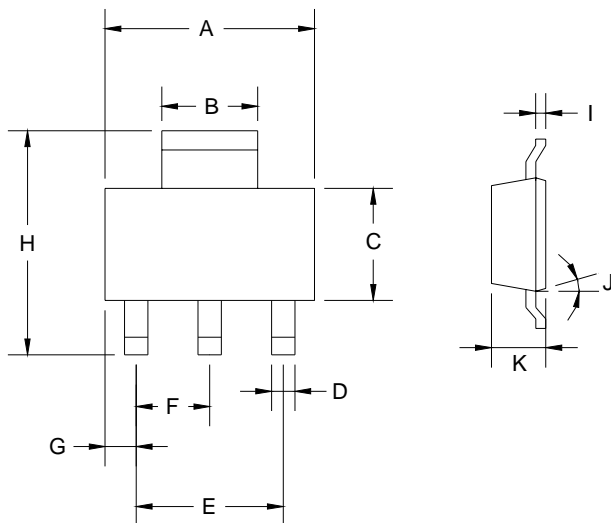

DIM	SOT-223 DIMENSION			
	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	6.350	6.850	0.250	0.270
B	2.900	3.100	0.114	0.122
C	3.450	3.750	0.136	0.148
D	0.595	0.635	0.023	0.025
E	4.550	4.650	0.179	0.183
F	2.250	2.350	0.088	0.093
G	0.835	1.035	0.032	0.041
H	6.700	7.300	0.263	0.287
I	0.250	0.355	0.010	0.014
J	10°	16°	10°	16°
K	1.550	1.800	0.061	0.071