
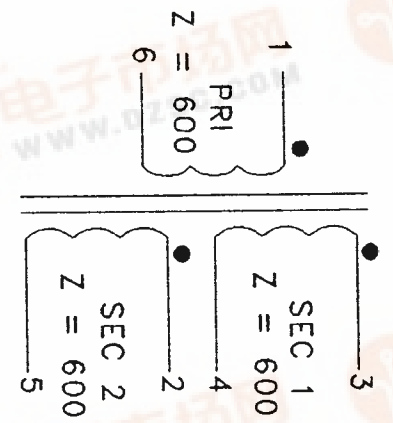
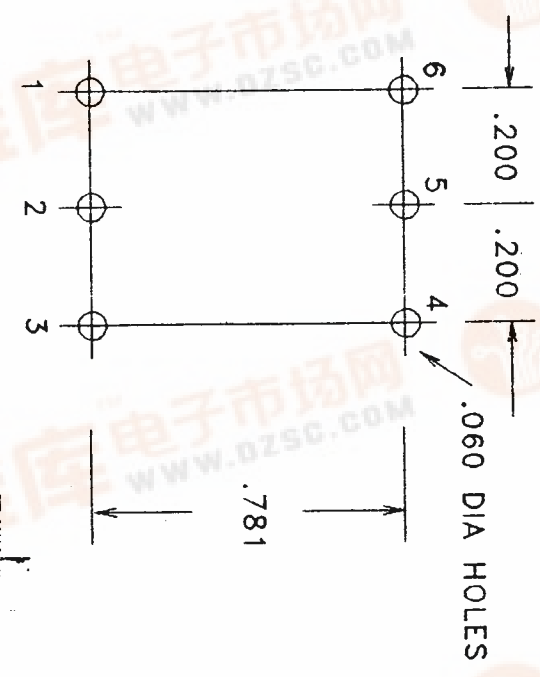


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032

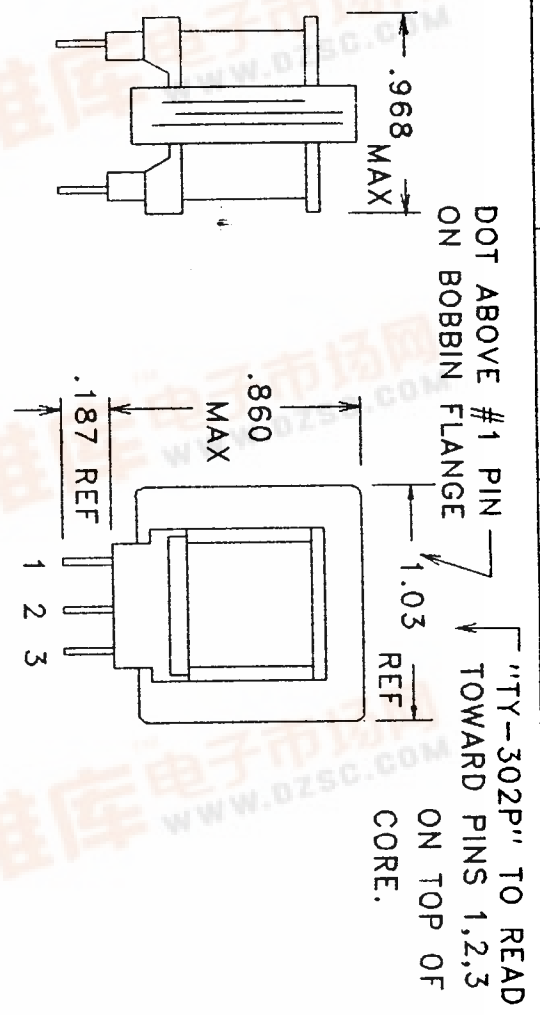

PRODUCTION TESTS

DC	1-6 = 34 NOM
RESISTANCE	3-4 = 24 NOM
IN OHMS	2-5 = 24 NOM
INDUCTANCE:	1.4 HY MINIMUM
HIPOT	= 1500V PRI TO SEC'S, CORE
	500V SEC TO SEC
	500V SEC'S TO CORE

APPLY = 1.8V, 400 HZ, PINS 1-6

INDUCTANCE: 1.4 HY MINIMUM

HIPOT = 1500V PRI TO SEC'S, CORE

500V SEC TO SEC

500V SEC'S TO CORE

IMPRREGNATION NOTES =PREHEAT 2 HRS

PINS TO BE FREE OF IMPREGNATION

FINAL ASSEMBLY NOTES

MagneTek

METHOD 1 X 1 MARKING "TY-302P" ON TOP OF CORE DATE & SITE CODE ON SIDE OF CORE

PART NO. TY-302P

