



**TRANSYS  
ELECTRONICS  
LIMITED**

# UF200G THRU UF208G


GLASS PASSIVATED JUNCTION ULTRAFAST SWITCHING RECTIFIER  
VOLTAGE - 50 to 800 Volts CURRENT - 2.0 Amperes

## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O Utilizing Flame Retardant Epoxy Molding Compound
- Glass passivated junction in DO-15 package
- 2.0 ampere operation at  $T_A=55\text{ }^\circ\text{C}$  with no thermal runaway
- Exceeds environmental standards of MIL-S-19500/228
- Ultra Fast switching for high efficiency

## MECHANICAL DATA

- Case: Molded plastic, DO-15
- Terminals: axial leads, solderable per MIL-STD-202, Method 208
- Polarity: Band denotes cathode
- Mounting Position: Any
- Weight: 0.015 ounce, 0.4 gram

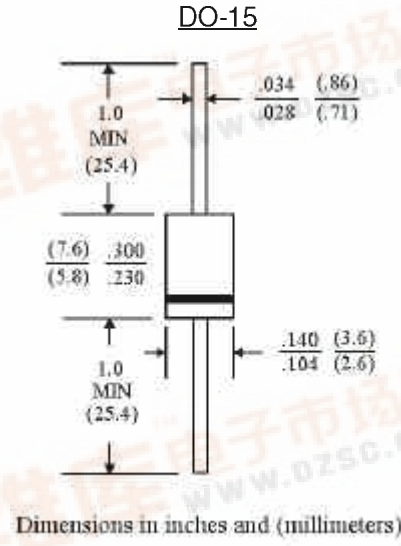

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25  $^\circ\text{C}$  ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

	UF200G	UF201G	UF202G	UF204G	UF206G	UF208G	UNITS
Peak Reverse Voltage, Repetitive; $V_{RM}$ :	50	100	200	400	600	800	V
Maximum RMS Voltage	35	70	140	280	420	560	V
DC Reverse Voltage; $V_R$	50	100	200	400	600	800	V
Average Forward Current, $I_o$ @ $T_A=55\text{ }^\circ\text{C}$ 3/8" lead length, 60 Hz, resistive or inductive load	2.0						A
Peak Forward Surge Current, $I_{FM}$ (surge) 8.3msec. single half sine wave superimposed on rated load(JEDEC method)	60						A
Maximum Forward Voltage $V_F$ @ 2.0A, 25 $^\circ\text{C}$	1.00		1.30	1.70			V
Maximum Reverse Current, @ Rated $T_J=25\text{ }^\circ\text{C}$	10.0						$\text{ }^\circ\text{gA}$
Reverse Voltage $T_J=100\text{ }^\circ\text{C}$	200						$\text{ }^\circ\text{gA}$
Typical Junction capacitance (Note 1) $C_J$	35						$\text{ }^\circ\text{F}$
Typical Junction Resistance (Note 2) $R_{\text{ }^\circ\text{KJA}}$	45						$\text{ }^\circ\text{J/W}$
Reverse Recovery Time $I_F=.5A, I_R=1A, I_{rr}=.25A$	50	50	50	50	100	100	ns
Operating and Storage Temperature Range	-55 to +150						$\text{ }^\circ\text{C}$

## NOTES:

- Measured at 1 MHz and applied reverse voltage of 4.0 VDC
- Thermal resistance from junction to ambient and from junction to lead length 0.375" (9.5mm) P.C.B. mounted



RATING AND CHARACTERISTIC CURVES  
 UF200G THRU UF208G

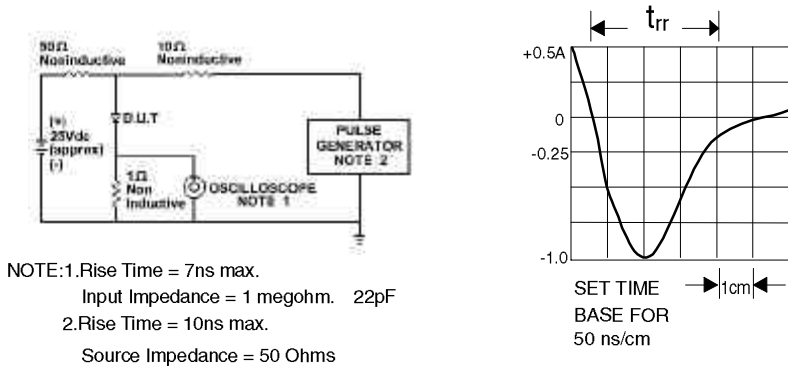


Fig. 1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

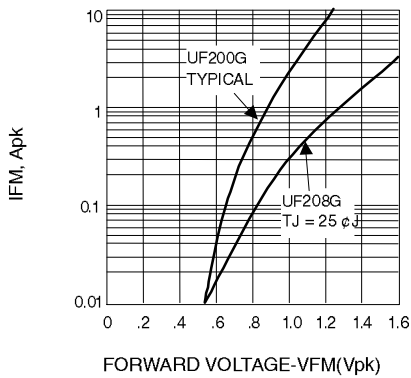


Fig. 2-FORWARD CHARACTERISTICS

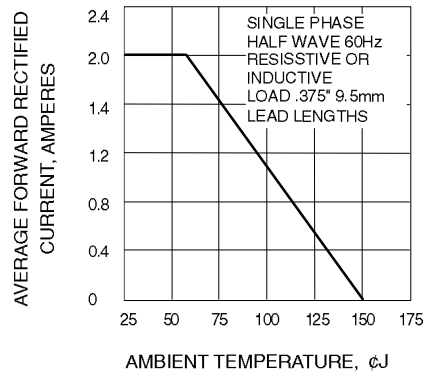


Fig. 3-FORWARD CURRENT DERATING CURVE

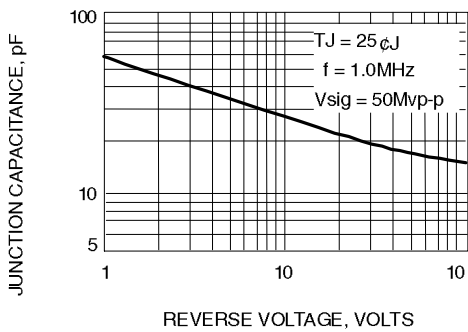


Fig. 4-TYPICAL JUNCTION CAPACITANCE

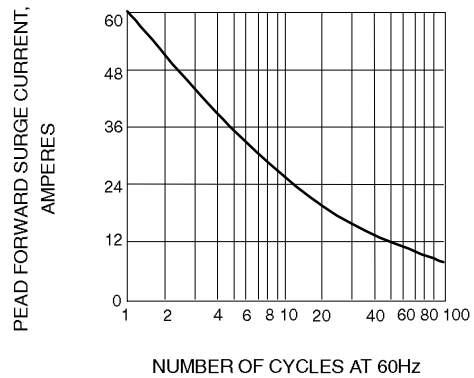


Fig. 5-PEAK FORWARD SURGE CURRENT