



DC COMPONENTS CO., LTD.
RECTIFIER SPECIALISTS

UF2A
THRU
UF2K

TECHNICAL SPECIFICATIONS OF SURFACE MOUNT ULTRA FAST RECTIFIER

VOLTAGE RANGE - 50 to 800 Volts

CURRENT - 2.0 Amperes

FEATURES

- * Ideal for surface mounted applications
- * Low leakage current
- * Glass passivated junction

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- * Polarity: As marked
- * Mounting position: Any
- * Weight: 0.093 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.



SMB (DO-214AA)

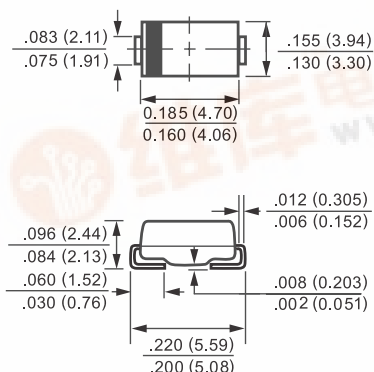

		SYMBOL	UF2A	UF2B	UF2D	UF2G	UF2J	UF2K	UNITS
Maximum Recurrent Peak Reverse Voltage		V _{RRM}	50	100	200	400	600	800	Volts
Maximum RMS Voltage		V _{RMS}	35	70	140	280	420	560	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	200	400	600	800	Volts
Maximum Average Forward Rectified Current at TA = 75 °C		IO	2.0						Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)		IFSM	60						Amps
Maximum Instantaneous Forward Voltage at 2.0A DC		VF	1.0			1.4	1.7		Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	@ TA = 25°C	IR	10						uAmps
	@ TA = 100°C		200						
Maximum Reverse Recovery Time (Note 3)		trr	50				100		nSec
Typical Thermal Resistance (Note 2)		RθJL	20				°C/W		
Typical Junction Capacitance (Note 1)		Cj	30				pF		
Operating and Storage Temperature Range		TJ,TSTG	-65 to + 175						°C

- NOTES:
1. Measured at 1 MHz and applied reverse voltage of 4.0 volts.
 2. Thermal Resistance (Junction to Ambient), 0.2x0.2in² (5X5mm²) copper pads to each terminal.
 3. Test Conditions: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A.

RATING AND CHARACTERISTIC CURVES (UF2A THRU UF2K)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

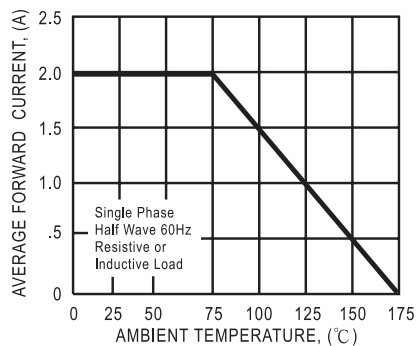


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

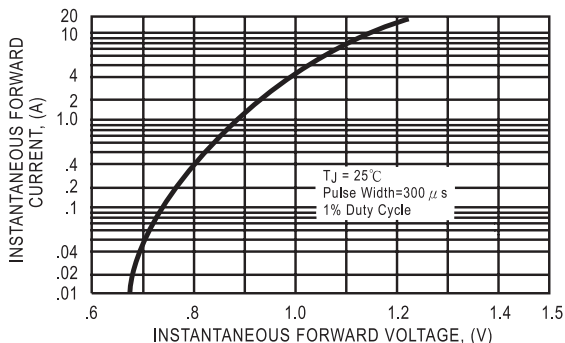


FIG. 3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

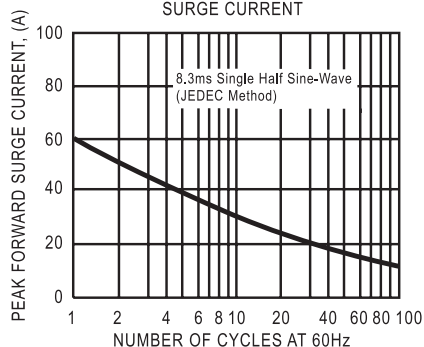


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

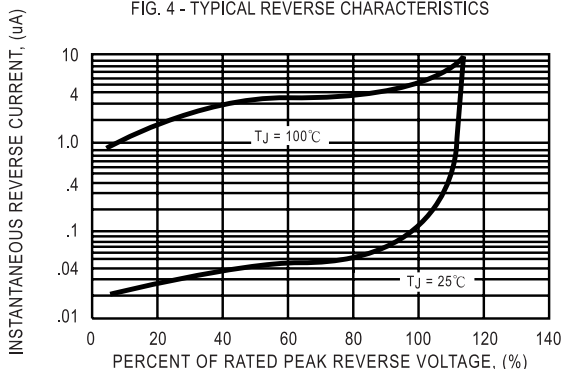


FIG. 5 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC





FIG. 6 - TYPICAL JUNCTION CAPACITANCE

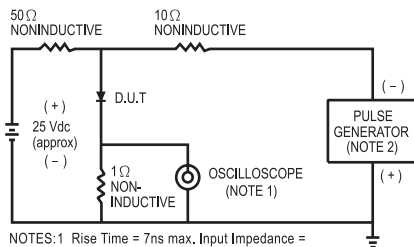