


UGF8FT AND UGF8GT

ULTRAFAST SOFT RECOVERY RECTIFIER


Reverse Voltage - 300 to 400 Volts Forward Current - 8.0 Amperes

ITO-220AC

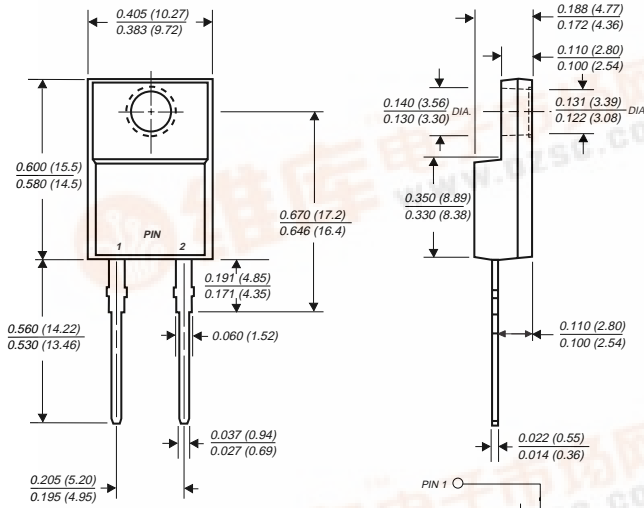

FEATURES

- ◆ Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- ◆ Ideally suited for freewheeling diode power factor correction applications
- ◆ Soft recovery characteristics
- ◆ Excellent high temperature switching
- ◆ Optimized to reduce switching losses
- ◆ High temperature soldering guaranteed: 250°C, 0.25" (6.35mm) from case for 10 seconds
- ◆ Glass passivated chip junction



MECHANICAL DATA

Case: ITO-220AC molded plastic body
Terminals: Plated leads, solderable per MIL-STD-750, Method 2026
Polarity: As marked
Mounting Position: Any
Weight: 0.08 ounce, 2.24 grams
Mounting Torque: 5 in. - lbs. max.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	UGF8FT	UGF8GT	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	300	400	Volts
Working peak reverse voltage	V_{RWM}	225	300	Volts
Maximum RMS voltage	V_{RMS}	210	280	Volts
Maximum DC blocking voltage	V_{DC}	300	400	Volts
Maximum average forward rectified current at $T_C=100^\circ\text{C}$	$I_{(AV)}$	8.0		Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	100.0		Amps
Maximum instantaneous forward voltage at $I_F=8\text{A}$ (NOTE 1)	V_F	$T_J=25^\circ\text{C}$ $T_J=150^\circ\text{C}$	1.30 1.00	Volts
Maximum reverse leakage current at working peak reverse voltage	I_R	$T_J=25^\circ\text{C}$ $T_J=100^\circ\text{C}$	10 350	μA
Reverse recovery time at $I_F=1.0\text{A}$, $di/dt=100\text{A}/\mu\text{s}$, $V_R=30\text{V}$, $I_{rr}=0.1 I_{RM}$	Maximum t_{rr}		50	ns
Maximum reverse recovery time at $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$	t_{rr}		35	ns
Maximum reverse recovery current at $I_F=10\text{A}$, $di/dt=50\text{A}/\mu\text{s}$, $V_R=30\text{V}$	I_{RM}	$T_C=100^\circ\text{C}$	5.5	Amps
Maximum stored charge $I_F=2\text{A}$, $di/dt=20\text{A}/\mu\text{s}$, $V_R=30\text{V}$, $I_{rr}=0.1 I_{RM}$	Q_{rr}		55	nC
Typical thermal resistance from junction to case	$R_{\theta JC}$		5.0	$^\circ\text{C}/\text{W}$
Operating junction and storage temperature range	T_J, T_{STG}		-40 to+150	$^\circ\text{C}$

NOTE:
 (1) Pulse test: 300 μs pulse width, 1% duty cycle

NOTICE: Advanced product information is subject to change without notice

RATINGS AND CHARACTERISTIC CURVES UGF8FT AND UGF8GT

FIG. 1 - FORWARD CURRENT DERATING CURVE

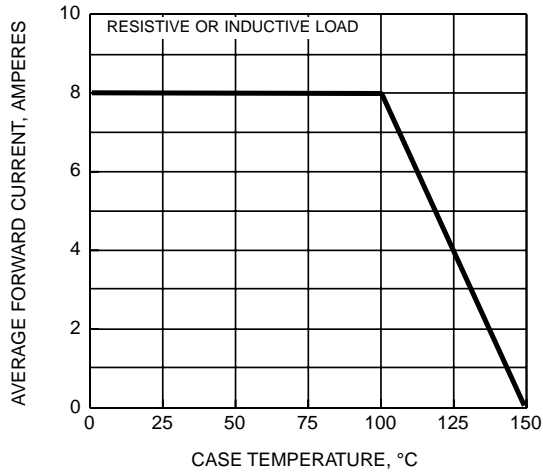


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

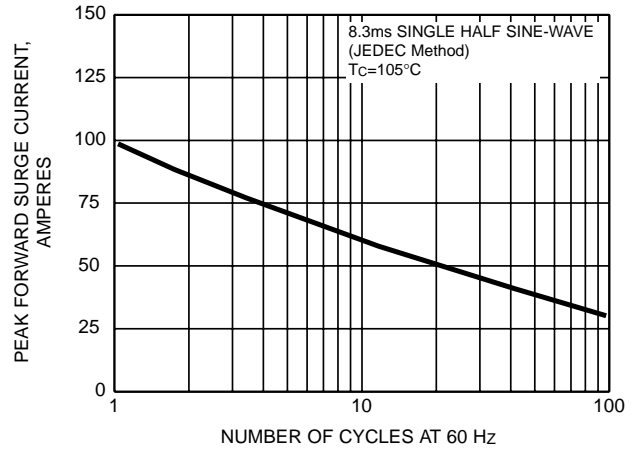


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

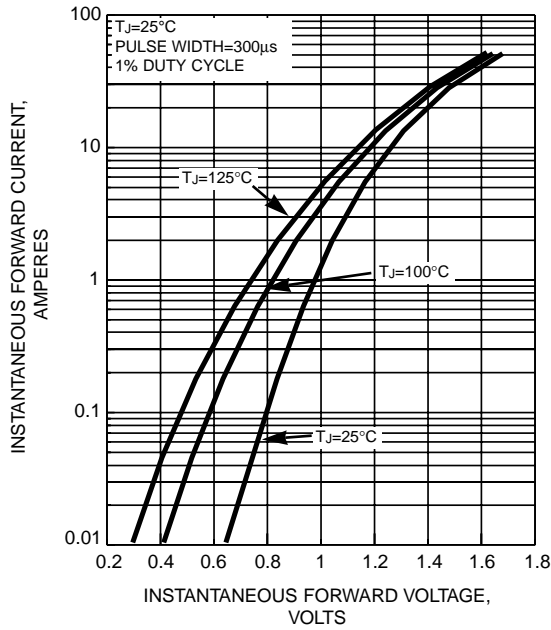


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS PER LEG

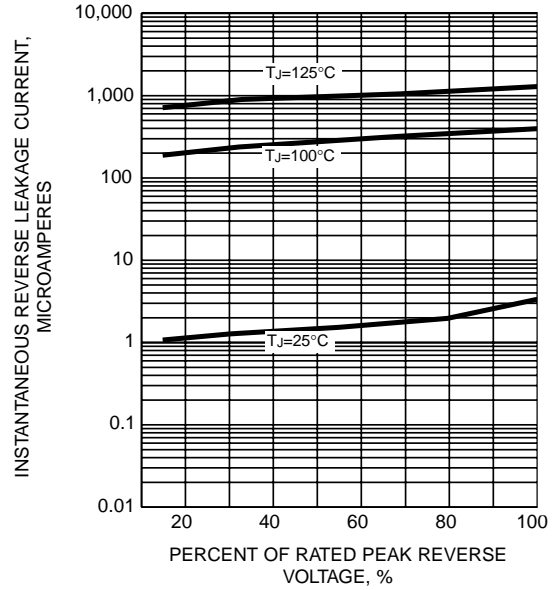


FIG. 5 - REVERSE SWITCHING CHARACTERISTICS

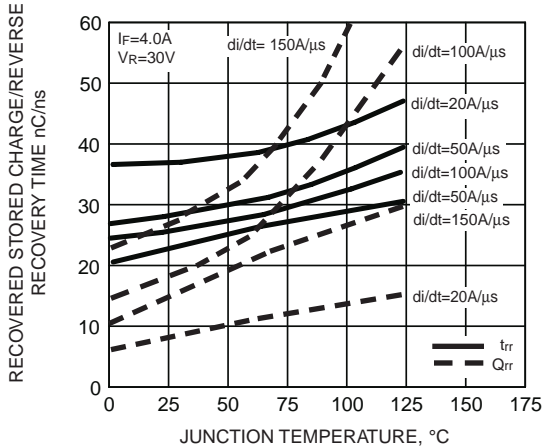


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

