

UN4111/4112/4113/4114/4115/4116/4117/4118/ 4119/4110/411D/411E/411F/411H/411L

Silicon PNP epitaxial planer transistor

For digital circuits

Features


- Costs can be reduced through downsizing of the equipment and reduction of the number of parts.
- New S type package, allowing supply with the radial taping.

Resistance by Part Number


	(R ₁)	(R ₂)
• UN4111	10kΩ	10kΩ
• UN4112	22kΩ	22kΩ
• UN4113	47kΩ	47kΩ
• UN4114	10kΩ	47kΩ
• UN4115	10kΩ	—
• UN4116	4.7kΩ	—
• UN4117	22kΩ	—
• UN4118	0.51kΩ	5.1kΩ
• UN4119	1kΩ	10kΩ
• UN4110	47kΩ	—
• UN411D	47kΩ	10kΩ
• UN411E	47kΩ	22kΩ
• UN411F	4.7kΩ	10kΩ
• UN411H	2.2kΩ	10kΩ
• UN411L	4.7kΩ	4.7kΩ

Absolute Maximum Ratings (T_a=25°C)

Parameter	Symbol	Ratings	Unit
Collector to base voltage	V _{CBO}	-50	V
Collector to emitter voltage	V _{CEO}	-50	V
Collector current	I _C	-100	mA
Total power dissipation	P _T	300	mW
Junction temperature	T _j	150	°C
Storage temperature	T _{stg}	-55 to +150	°C

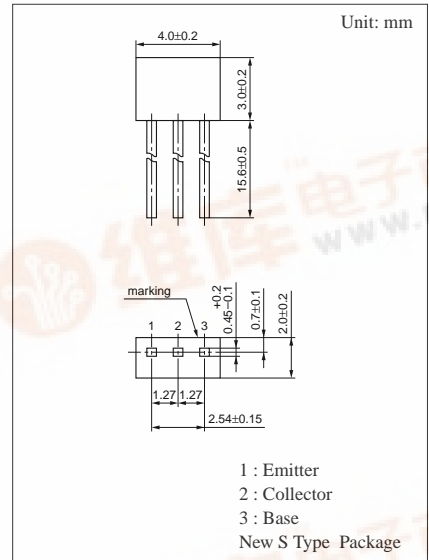

Internal Connection

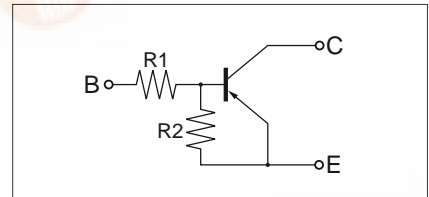

**UN4111/4112/4113/4114/4115/4116/4117/4118/
Transistors with built-in Resistor 4119/4110/411D/411E/411F/411H/411L**

Electrical Characteristics (Ta=25°C)


Parameter		Symbol	Conditions	min	typ	max	Unit	
Collector cutoff current		I _{CBO}	V _{CB} = -50V, I _E = 0			-0.1	μA	
		I _{CEO}	V _{CE} = -50V, I _B = 0			-0.5	μA	
Emitter cutoff current	UN4111	I _{EBO}	V _{EB} = -6V, I _C = 0			-0.5	mA	
	UN4112/4114/411E/411D					-0.2		
	UN4113					-0.1		
	UN4115/4116/4117/4110					-0.01		
	UN411F/411H					-1.0		
	UN4119					-1.5		
	UN4118/411L					-2.0		
Collector to base voltage		V _{CBO}	I _C = -10μA, I _E = 0	-50			V	
Collector to emitter voltage		V _{CEO}	I _C = -2mA, I _B = 0	-50			V	
Forward current transfer ratio	UN4111	h _{FE}	V _{CE} = -10V, I _C = -5mA	35				
	UN4112/411E			60				
	UN4113/4114			80				
	UN4115*/4116*/4117*/4110*			160		460		
	UN411F/411D/4119/411H			30				
	UN4118/411L			20				
Collector to emitter saturation voltage		V _{CE(sat)}	I _C = -10mA, I _B = -0.3mA			-0.25	V	
Output voltage high level		V _{OH}	V _{CC} = -5V, V _B = -0.5V, R _L = 1kΩ	-4.9			V	
Output voltage low level		V _{OL}	V _{CC} = -5V, V _B = -2.5V, R _L = 1kΩ			-0.2	V	
			V _{CC} = -5V, V _B = -3.5V, R _L = 1kΩ			-0.2		
			V _{CC} = -5V, V _B = -10V, R _L = 1kΩ			-0.2		
			V _{CC} = 5V, V _B = -6V, R _L = 1kΩ			-0.2		
Transition frequency		f _T	V _{CB} = -10V, I _E = 1mA, f = 200MHz		80		MHz	
Input resistance	UN4111/4114/4115	R _i		(-30%)		(+30%)	kΩ	
	UN4112/4117							10
	UN4113/4110/411D/411E							22
	UN4116/411F/411L							47
	UN4118							4.7
	UN4119							0.51
	UN411H							1
Resistance ratio	UN4111/4112/4113/411L	R _i /R ₂			0.8	1.0	1.2	
	UN4114				0.17	0.21	0.25	
	UN4118/4119				0.08	0.1	0.12	
	UN411D				3.7	4.7	5.7	
	UN411E				1.7	2.14	2.6	
	UN411F				0.37	0.47	0.57	
	UN411H				0.17	0.22	0.27	

* h_{FE} rank classification (UN4115/4116/4117/4110)







Rank	Q	R	S
h _{FE}	160 to 260	210 to 340	290 to 460

UN4111/4112/4113/4114/4115/4116/4117/4118/
 Transistors with built-in Resistor 4119/4110/411D/411E/411F/411H/411L

Common characteristics chart






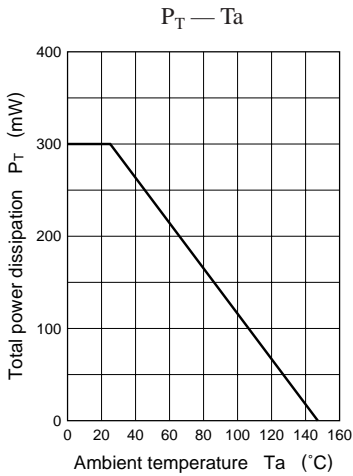


Characteristics charts of UN4111

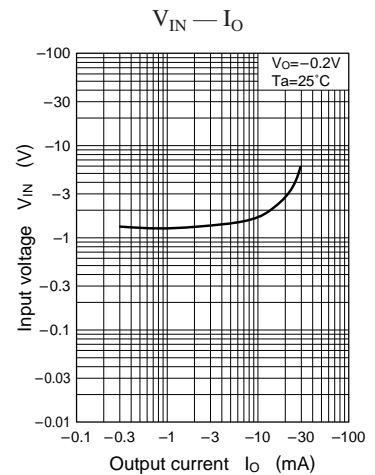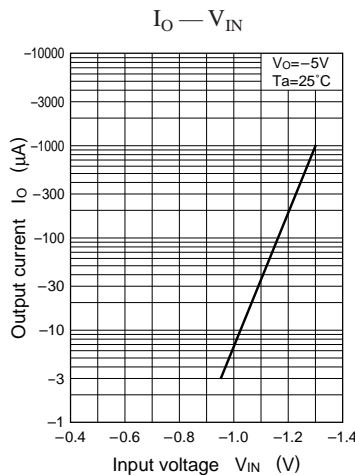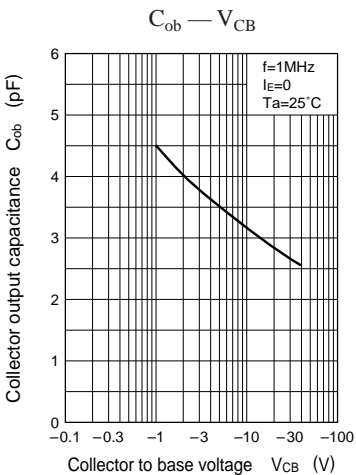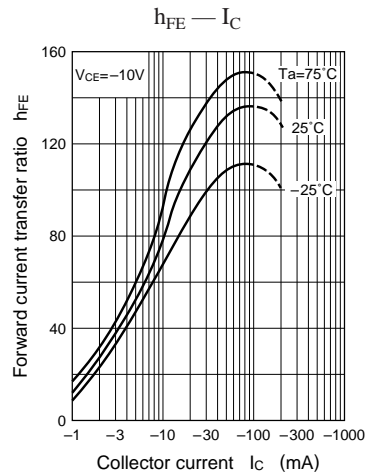
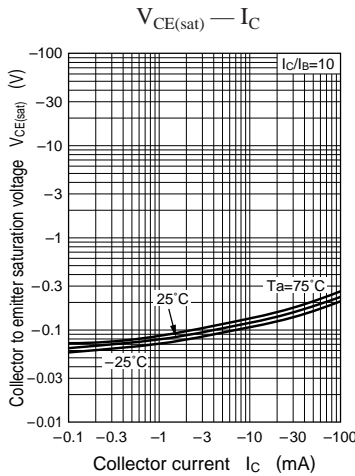
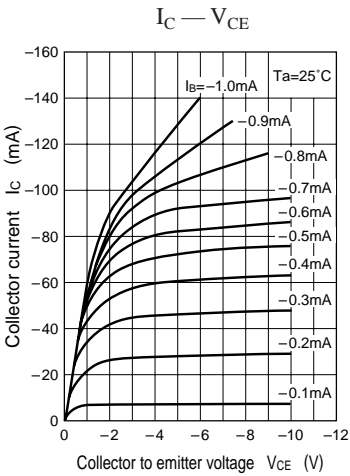


UN4111/4112/4113/4114/4115/4116/4117/4118/
 Transistors with built-in Resistor 4119/4110/411D/411E/411F/411H/411L




Characteristics charts of UN4112

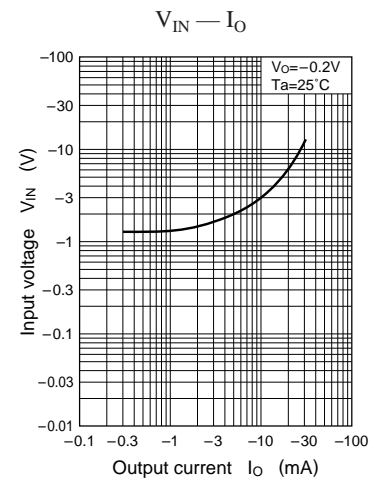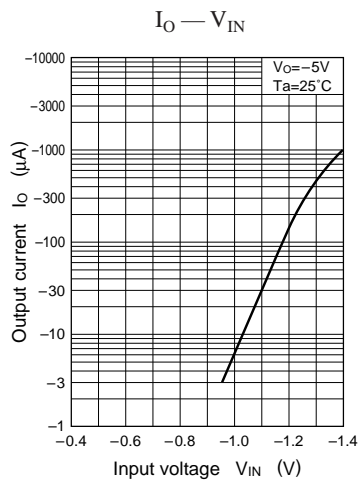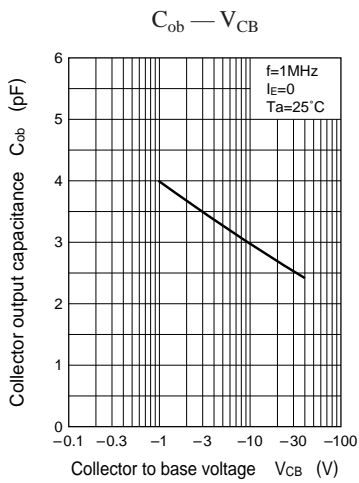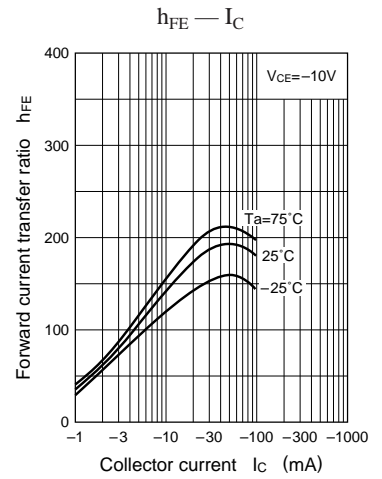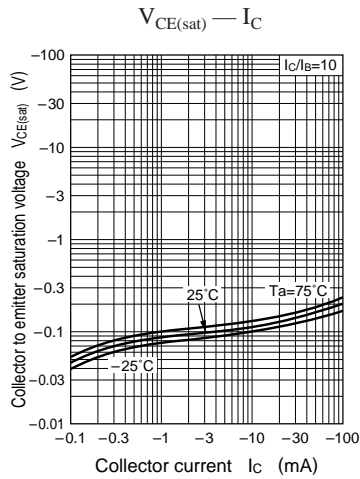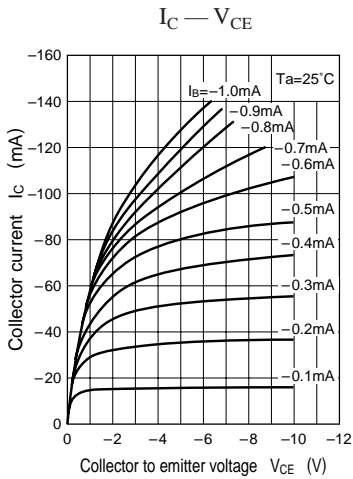







Characteristics charts of UN4113

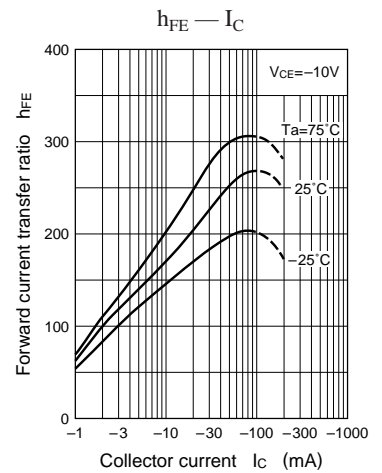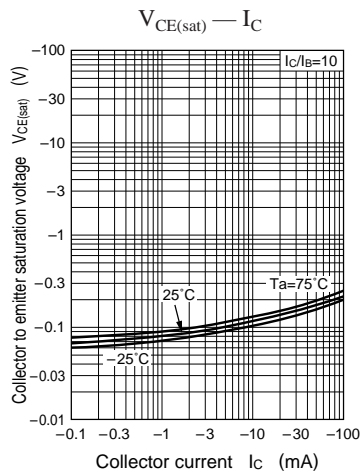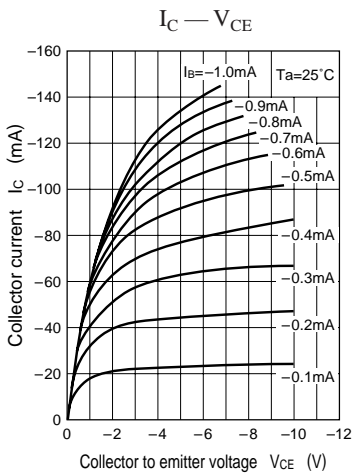

UN4111/4112/4113/4114/4115/4116/4117/4118/
 Transistors with built-in Resistor 4119/4110/411D/411E/411F/411H/411L




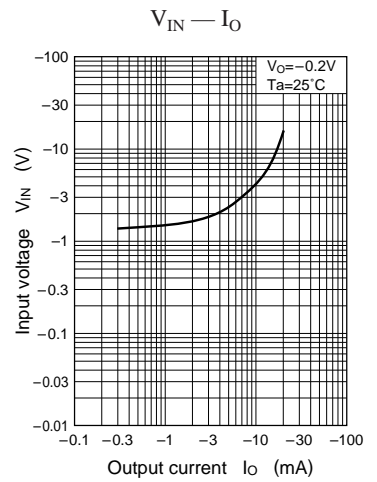
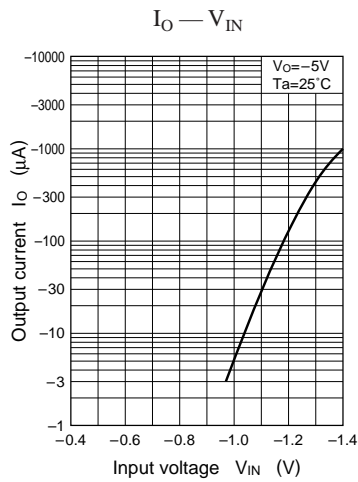
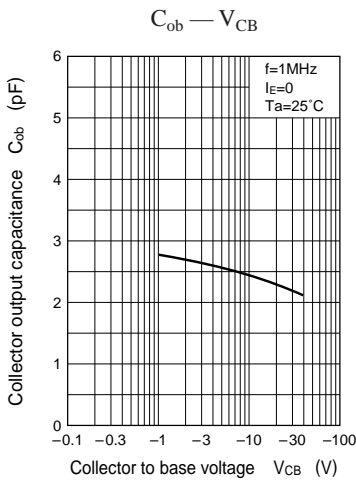


Characteristics charts of UN4114

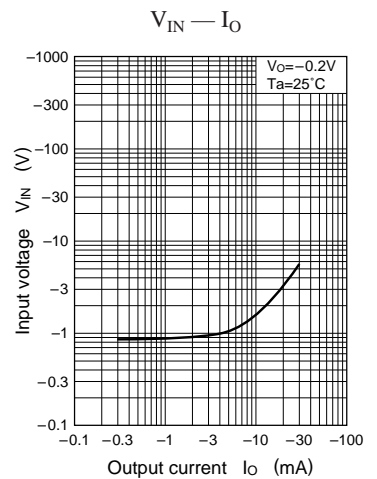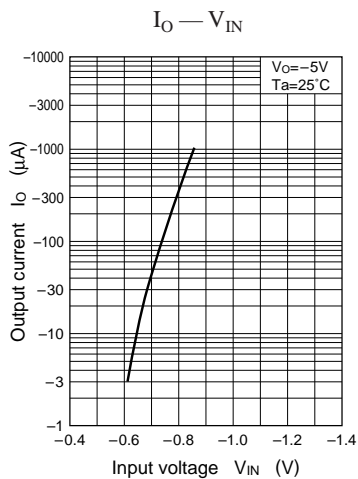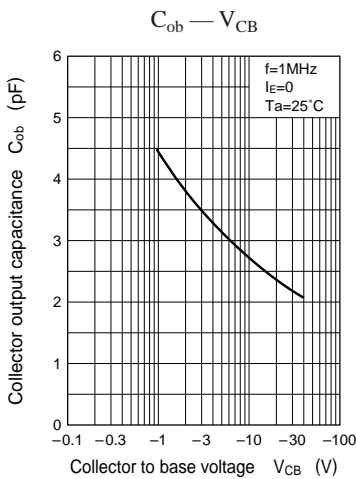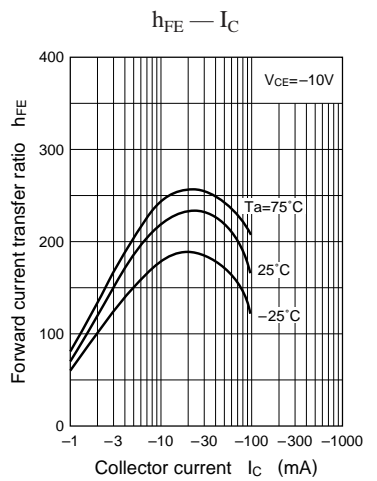
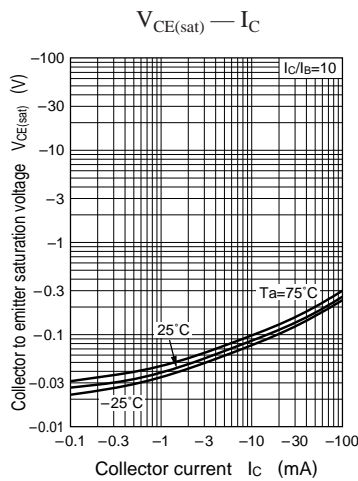
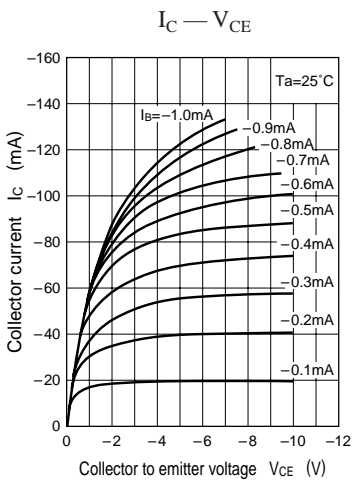


UN4111/4112/4113/4114/4115/4116/4117/4118/
 Transistors with built-in Resistor 4119/4110/411D/411E/411F/411H/411L




Characteristics charts of UN4115

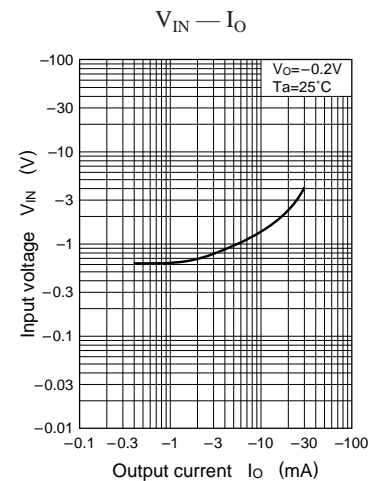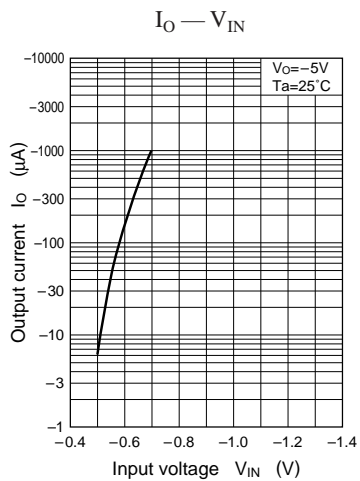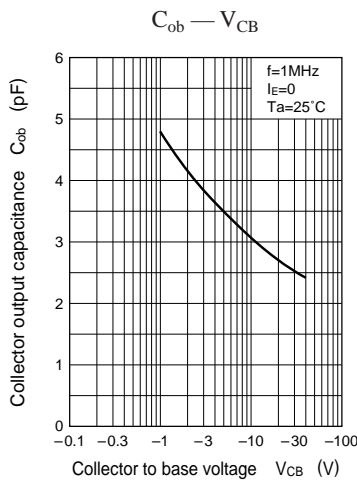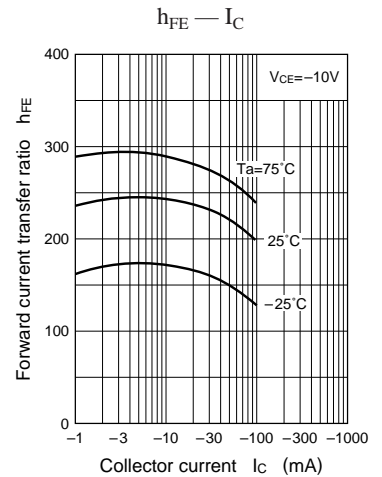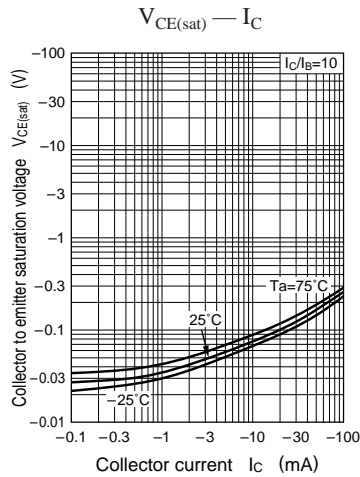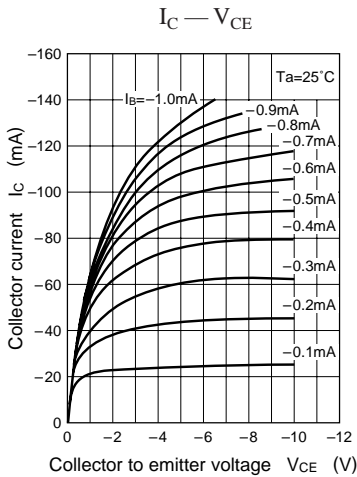







Characteristics charts of UN4116

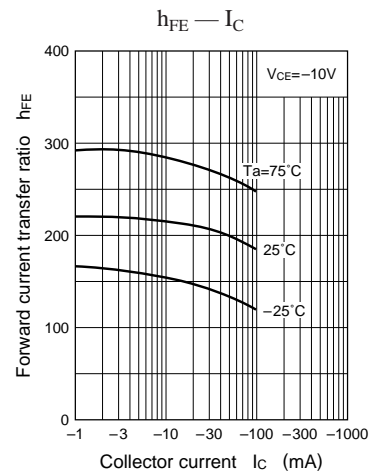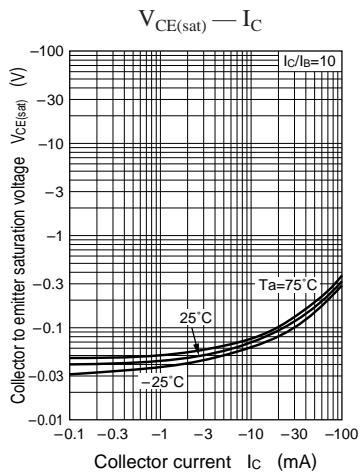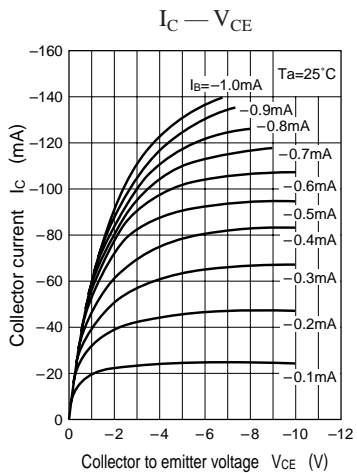

UN4111/4112/4113/4114/4115/4116/4117/4118/
 Transistors with built-in Resistor 4119/4110/411D/411E/411F/411H/411L




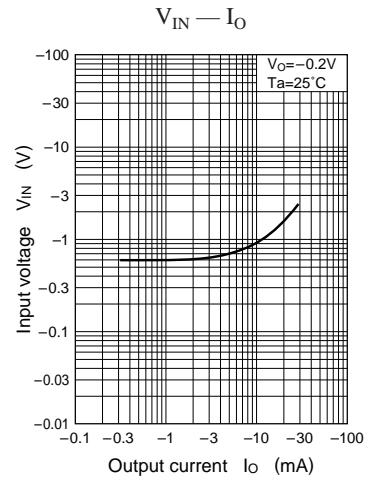
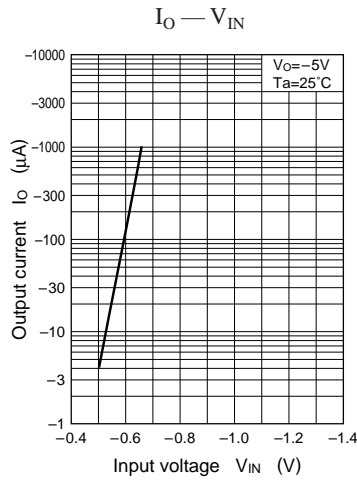
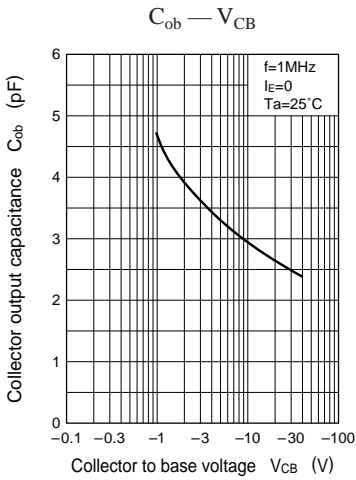


Characteristics charts of UN4117

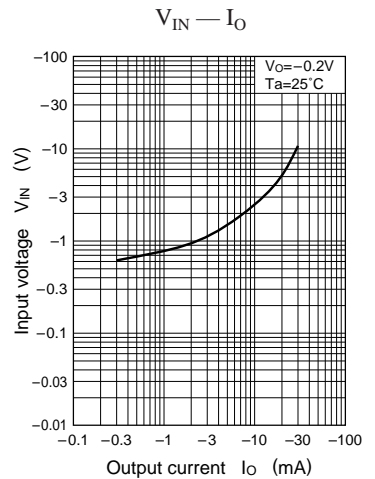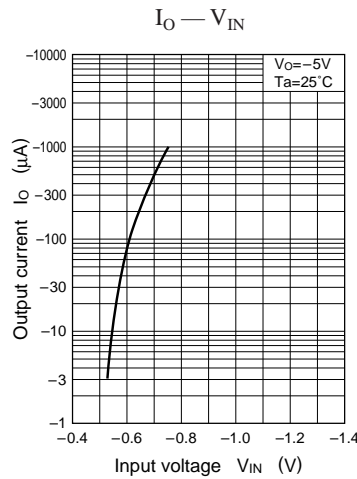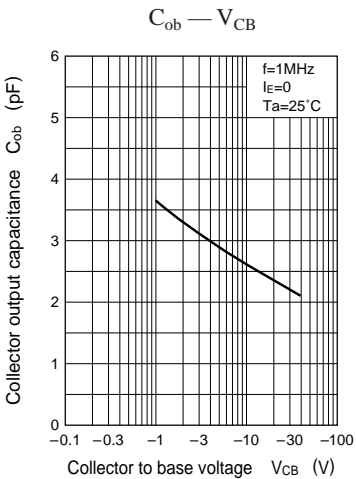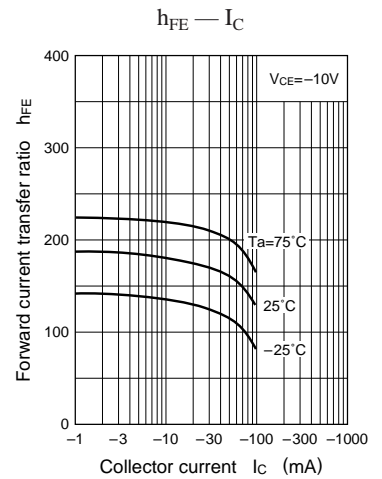
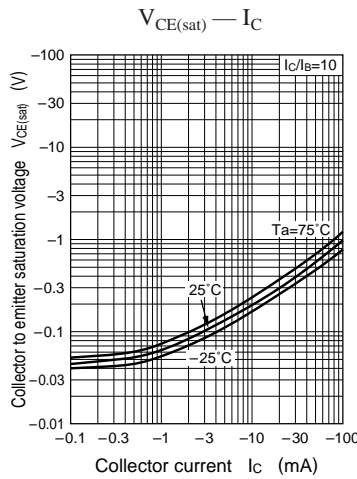
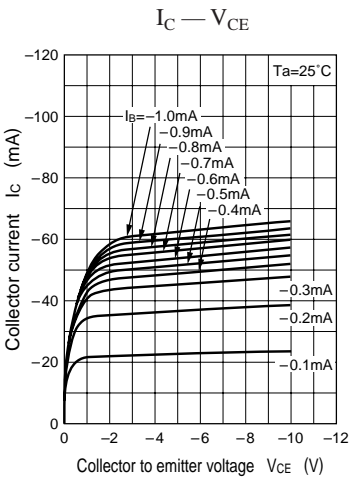


UN4111/4112/4113/4114/4115/4116/4117/4118/
 Transistors with built-in Resistor 4119/4110/411D/411E/411F/411H/411L




Characteristics charts of UN4118

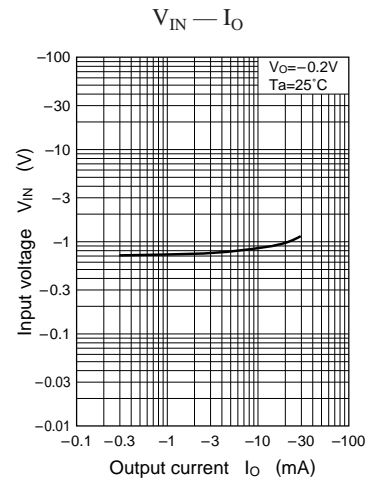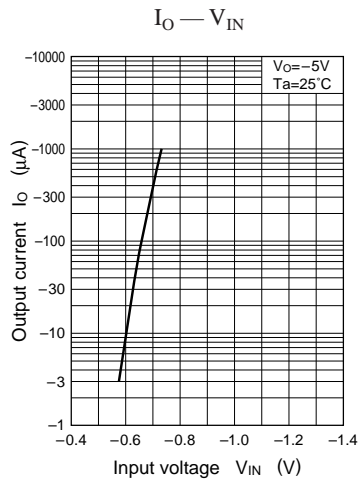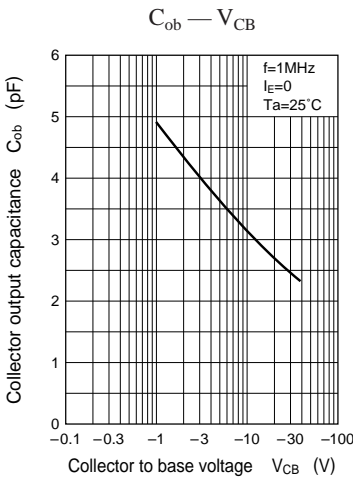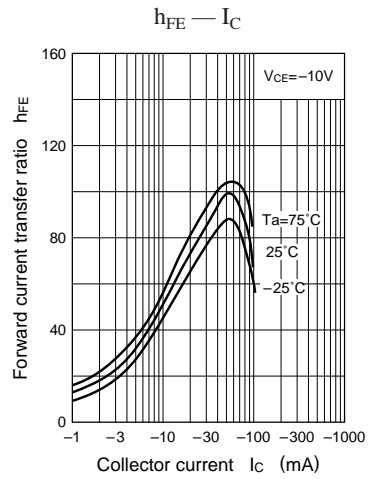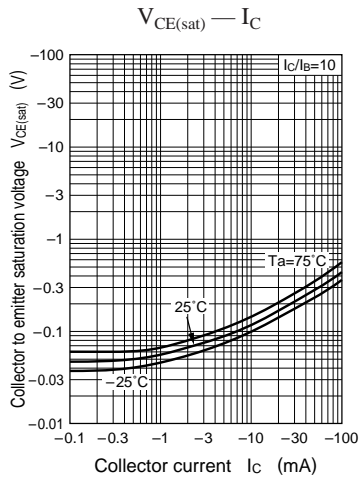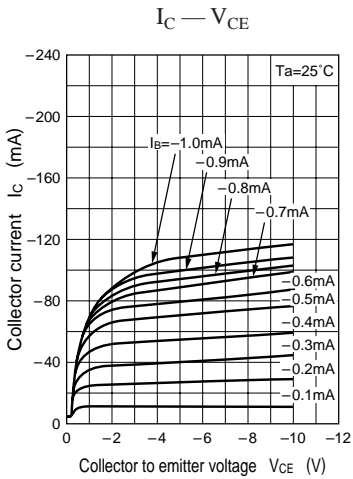







Characteristics charts of UN4119

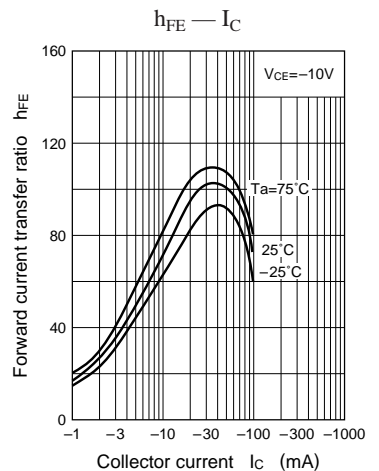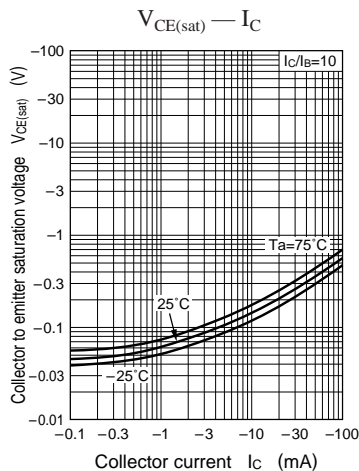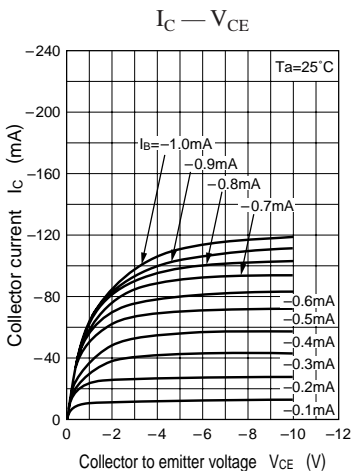

UN4111/4112/4113/4114/4115/4116/4117/4118/
 Transistors with built-in Resistor 4119/4110/411D/411E/411F/411H/411L




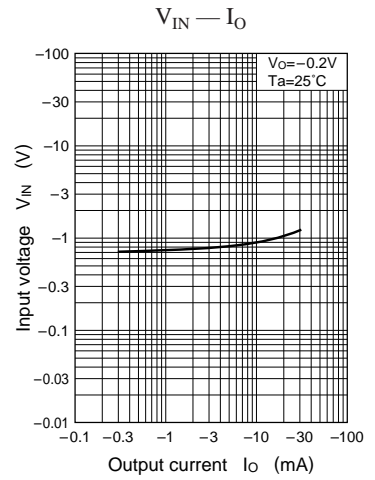
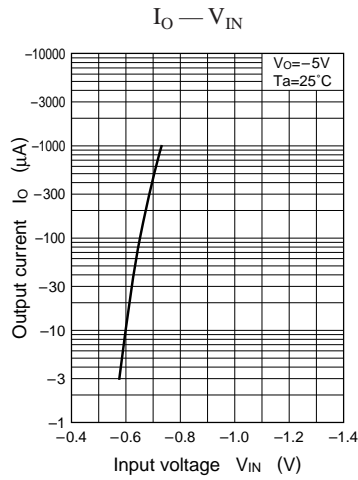
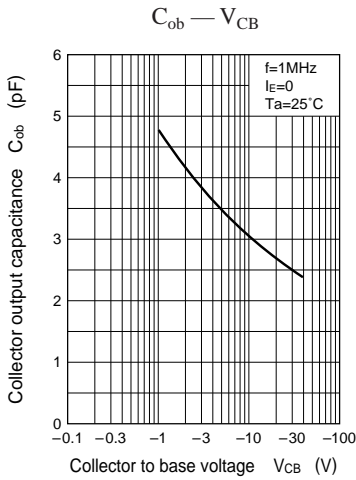


Characteristics charts of UN4110

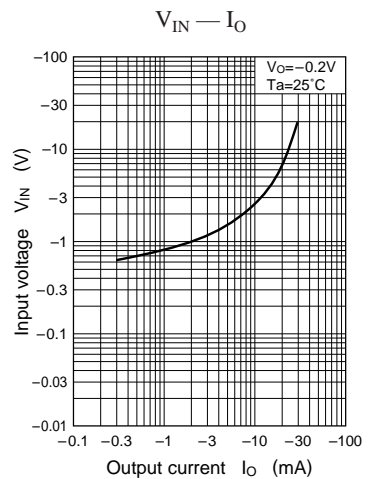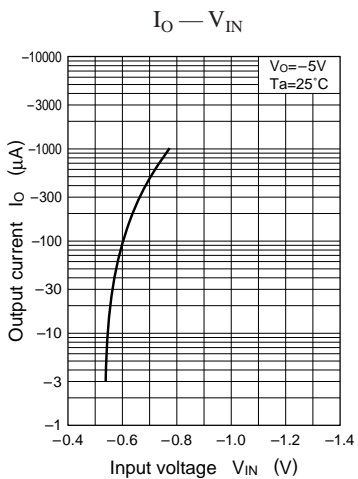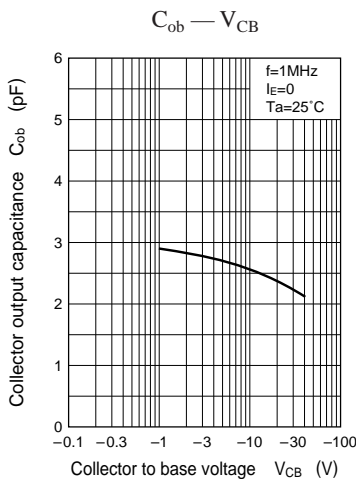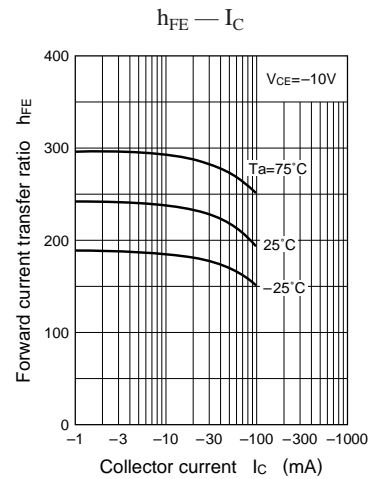
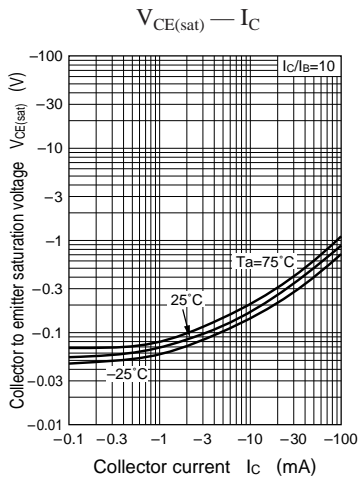
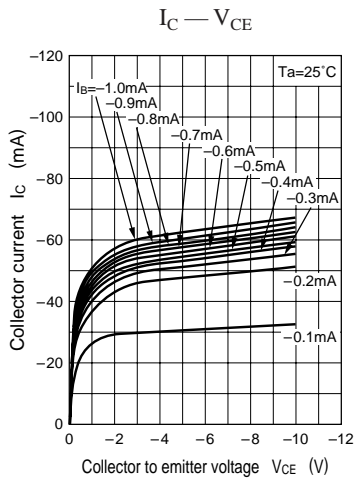


UN4111/4112/4113/4114/4115/4116/4117/4118/
 Transistors with built-in Resistor 4119/4110/411D/411E/411F/411H/411L




Characteristics charts of UN411D

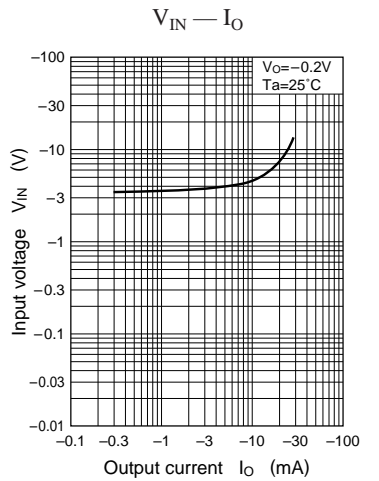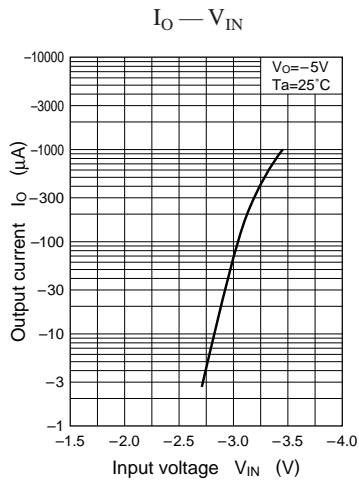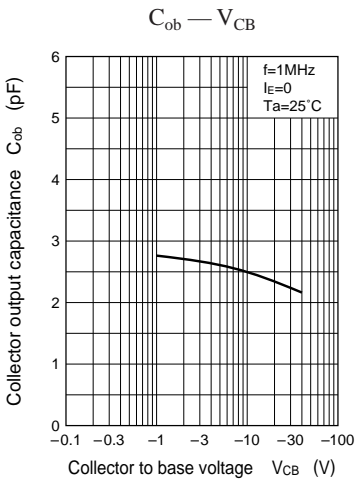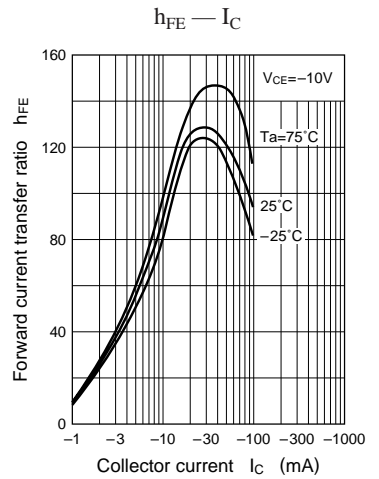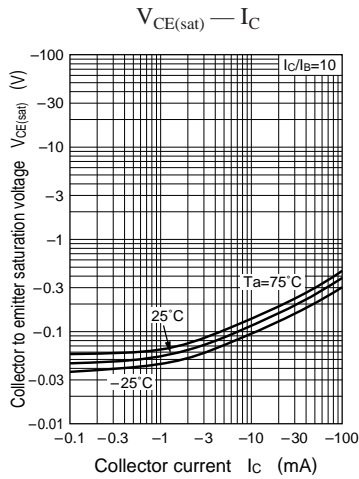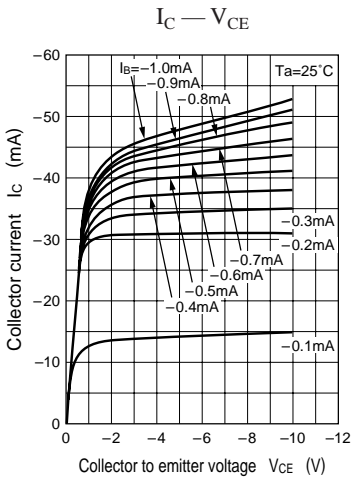







Characteristics charts of UN411E

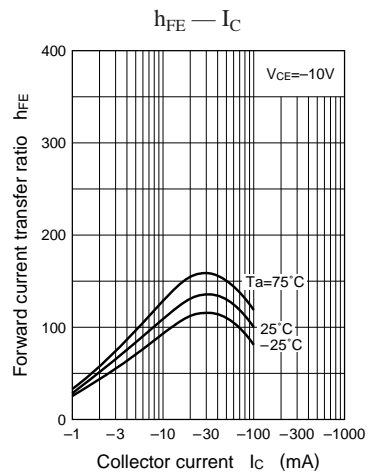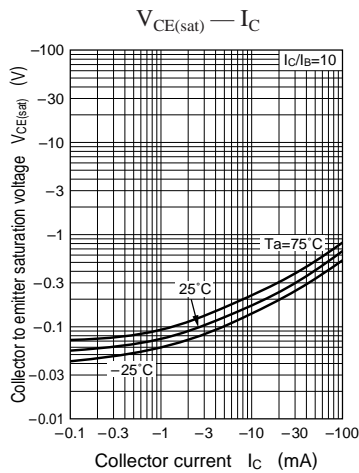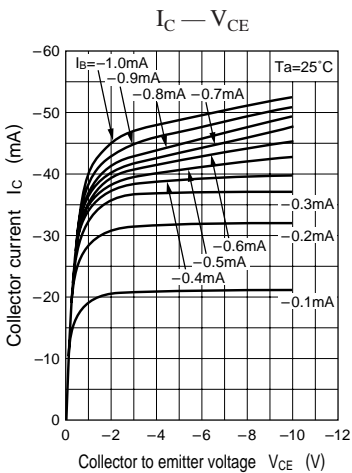

UN4111/4112/4113/4114/4115/4116/4117/4118/
 Transistors with built-in Resistor 4119/4110/411D/411E/411F/411H/411L



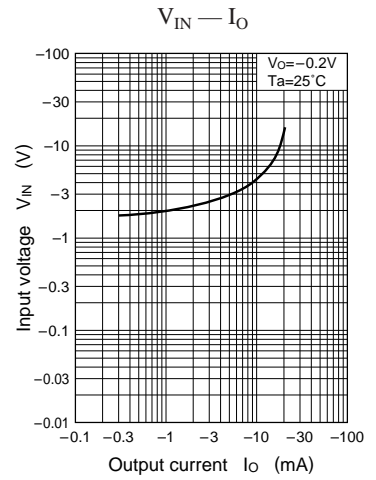
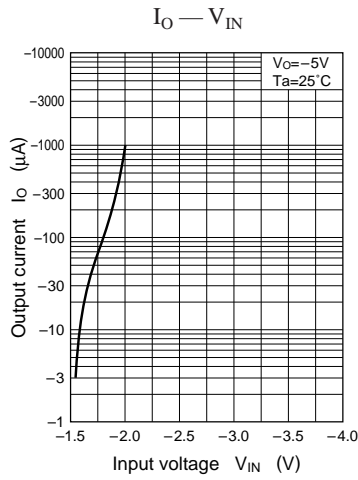
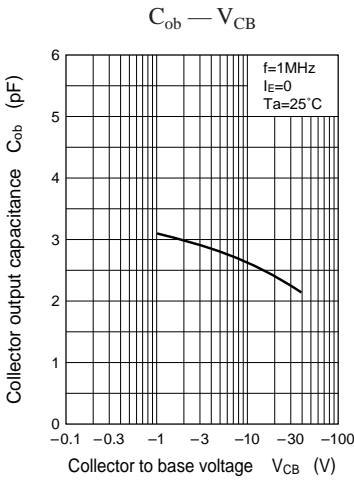


Characteristics charts of UN411F

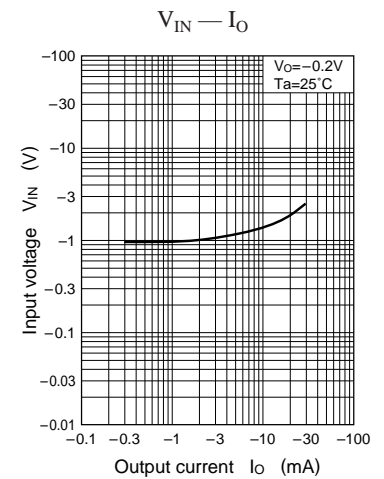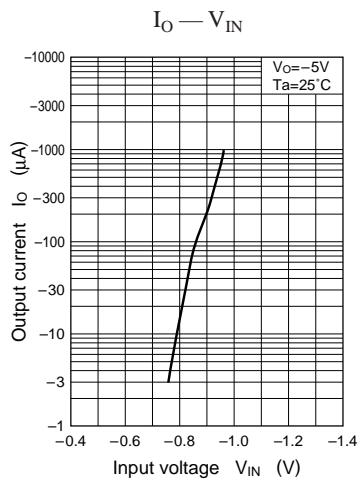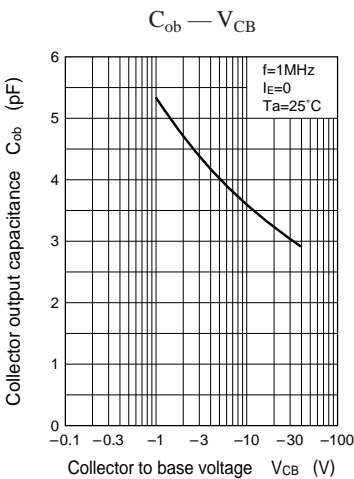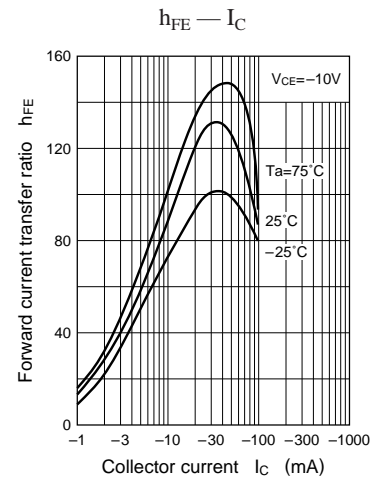
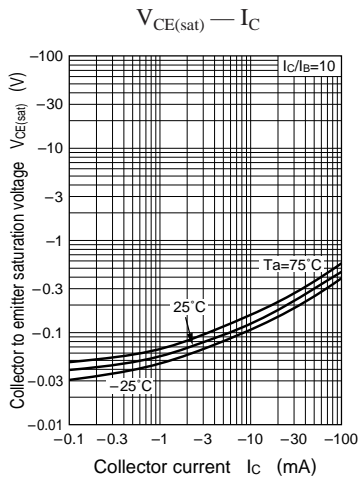
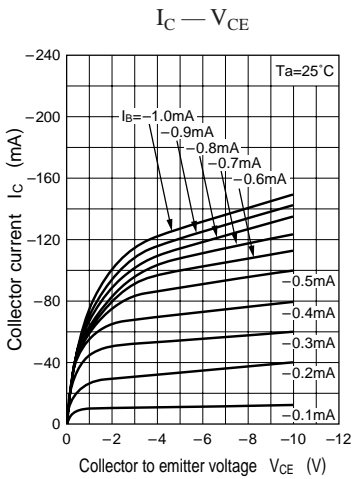


UN4111/4112/4113/4114/4115/4116/4117/4118/
 Transistors with built-in Resistor 4119/4110/411D/411E/411F/411H/411L

Characteristics charts of UN411H

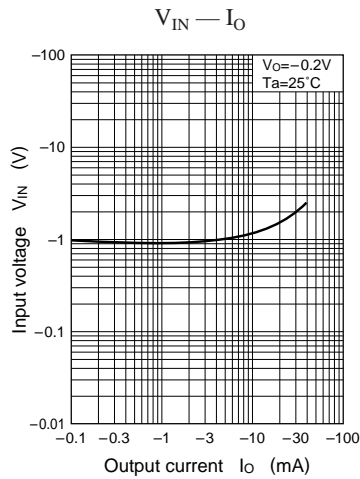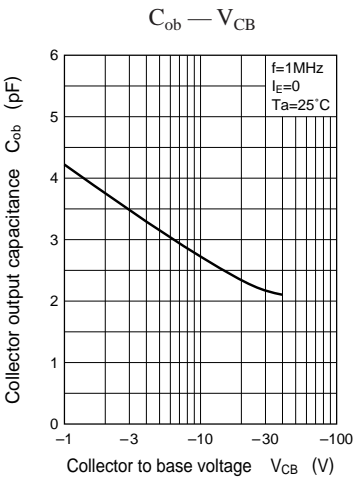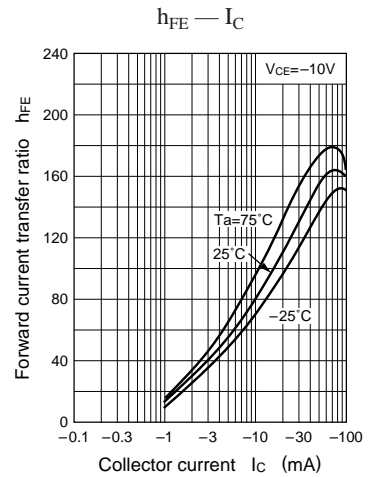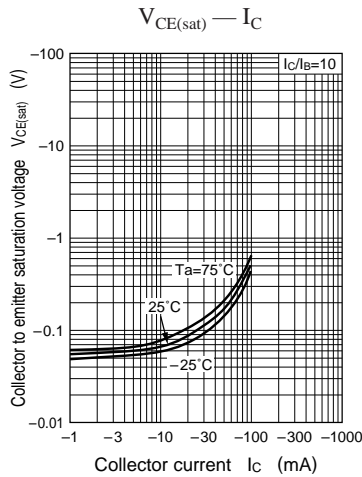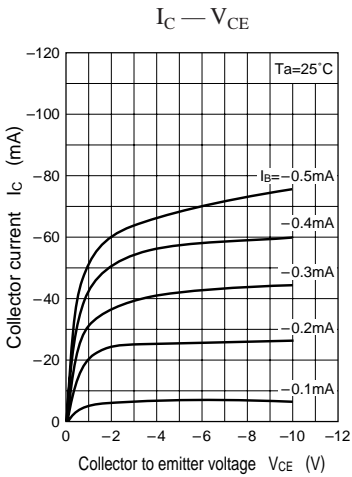

Characteristics charts of UN411L

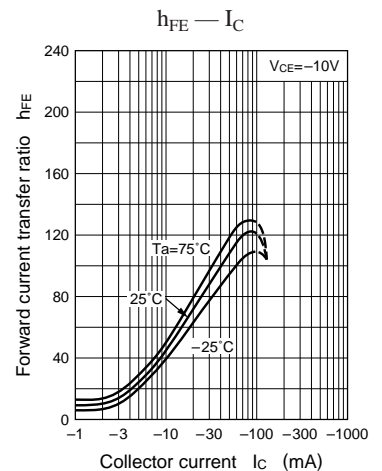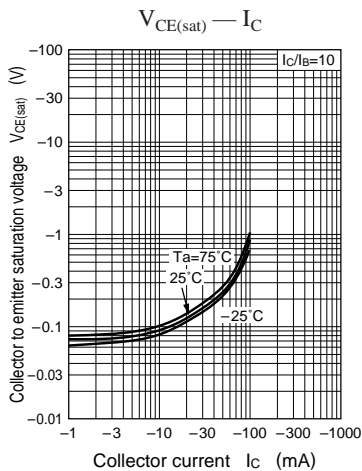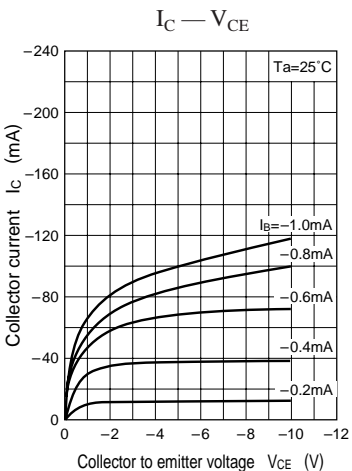

UN4111/4112/4113/4114/4115/4116/4117/4118/
Transistors with built-in Resistor 4119/4110/411D/411E/411F/411H/411L

