




ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT21314V-TS	4-Fold Common Mode Choke	A1	05/29
<p>Characteristic data:</p> <p>RI=RII≤200mΩ In=500mA Tu(amb)≤60°C</p>		<p>Schematic diagram:</p> 	
<p>Electrical Specification at 25°C:</p> <p>1.)L≥5.0uH, at 10KHz 100mV 2.)Polarity and turns ratio tolerance:±1% 3.)HI-pot test: Up=300Vrms,2s(Winding to Winding)</p>			
<p>Dimension:</p>  <div style="text-align: right; margin-top: 10px;">  </div> <p>NOTE: 1 Packaging Information: Tape and Reel according to Item NO.“K5SA” OF DATA SHEET 01-00” 2. For RoHS compliant products: a.) The UMEC ordering code: TG-UT21314V-TS b.) Date Code suffix to “G” (xxxxG). c.) Solder : Sn/Ag/Cu . 3. Specifications are subject to change without prior notice</p> <p>UNIT: mm Tolerances: ±0.2mm</p>			

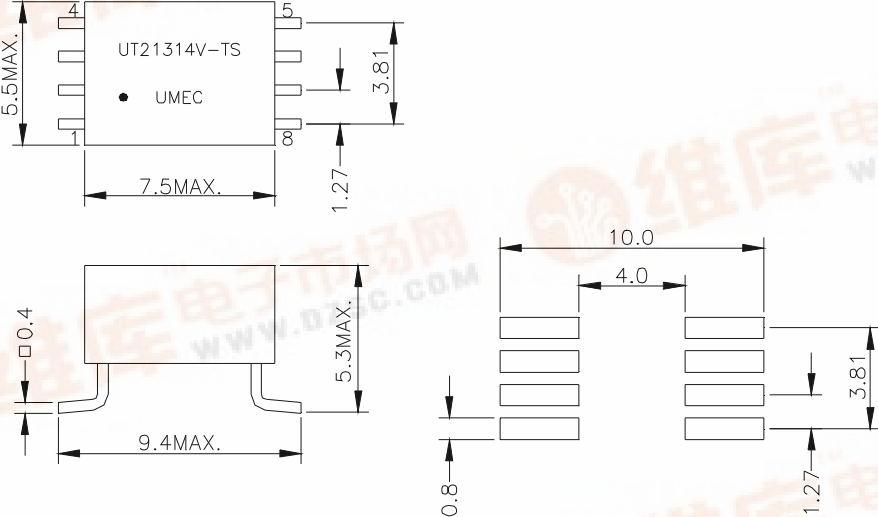