
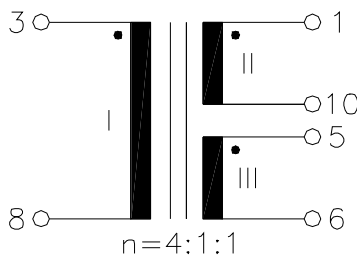


ISDN

UM MODEL NO.: UT28521	SPECIFICATION S _O -Interface Transformer	REV. A1	
Characteristic data: RI ≈ 5.0Ω RII=RIII ≈ 1.2Ω Tu(amb)≤60 ⁰ C	Schematic diagram: 		
Electrical Specification at 25 ⁰ C: 1.)LII+III≥22mH,(NII+III series),at 10KHz 100mV 2.)Polarity and turns ratio tolerance: ±2% 3.)Ck≤105pF,(NI to NII NIII),at 10KHz 100mV 4.)LsII+III≤4.0uH,(NII+III series, NI shorted),at 100KHz 100mV 5.)HI-pot test: Up=1.5KVrms,2s(NI to NII+NIII) Up=0.5KVrms,2s(NII to NIII)			
Dimension: 			
NOTE: Specifications are subject to change without prior notice. UNIT: mm Tolerances: ±0.2mm			

E10-013-C

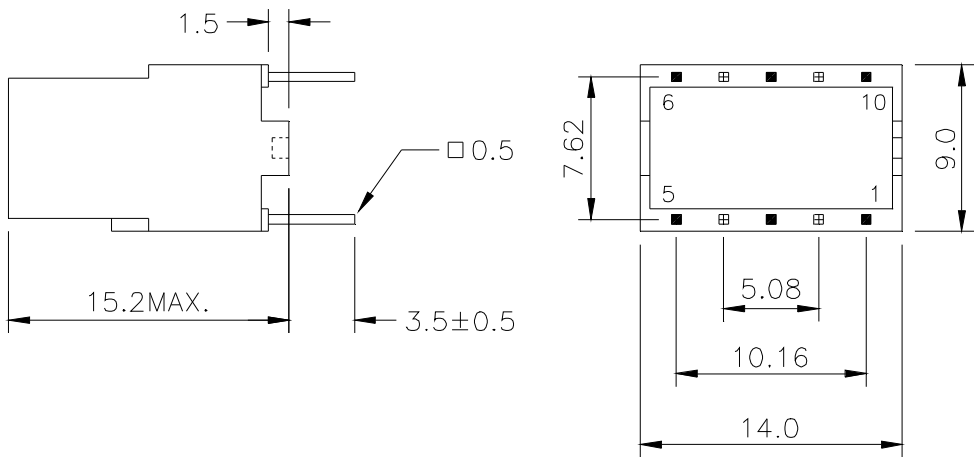