

UTCKA22427 LINEAR INTEGRATED CIRCUIT


I-CHIP AM/FM RADIO IC

DESCRIPTION

UTC KA22427 is a one-chip AM/FM radio integrated circuit that is suitable for portable radio applications. It includes AM amplifier, local OSC, AM mixer, AM/FM amplifier, AM AGE, FM AGE circuit and also class b Audio Power Amplifier.


FEATURES

- *Low external components count.
- *Wide operating voltage : 3 - 13 V.
- *Internal regulated supply for constant current operation.
- *DC selection of AM/FM mode.

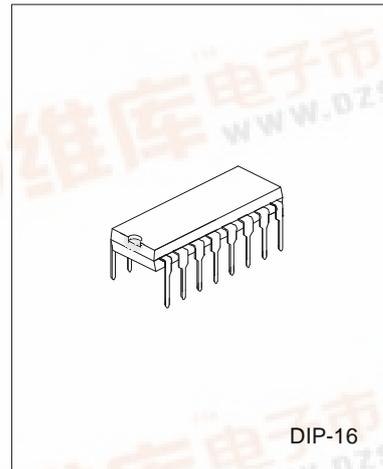

DIP-16

BLOCK DIAGRAM

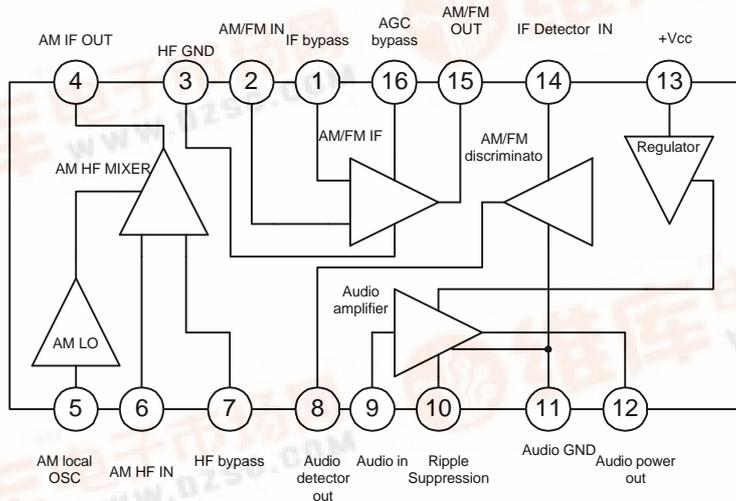

ABSOLUTE MAXIMUM RATING (Ta=25°C)

PARAMETER	SYMBOL	VALUE	UNIT
SUPPLY VOLTAGE	VCC	11	V
SUPPLY CURRENT	ICC	44	mA
POWER DISSIPATION	PD	600	mW
THERMAL RESISTANCE	RJ-A	100	°C/W
OPERATING TEMPERATURE	TOPX	-18~65	°C
STORAGE TEMPERATURE	TSTG	-40~125	°C

NOTE: Ta>25°C, DERATE WITH 10mW/°C UNLESS SPECIFIED.

UTC UNISONIC TECHNOLOGIES CO., LTD.



UTC KA22427 LINEAR INTEGRATED CIRCUIT

ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Quiescent Circuit Current	IC _{CCQ}	SW1→FM, V _{CC} =3V	7	12	17	mA
		SW1→FM, V _{CC} =9V	10	17	23	
Pin 16 Terminal Voltage	V _{16(FM)}	SW1→FM, I _{CC} =42mA	2.0	2.4	3.1	V
Limiting Voltage	V _{IN(lim)}	SW1→FM, V _{CC} =5.5V, -3dB V ₁₆ =2.4V, V _R =Min.		57		dBμV
Internal Regulated Voltage	V _{CC}	SW1→AM, I _{CC} =42mA	12.5	13.2	14.0	V
Pin 16 Voltage	V _{16(AM)}	SW1→AM, V _{CC} =9V	1.4		1.9	V
Signal to Noise Ratio	V _O	SW1→AM, V _{CC} =12V, V _{IN} =37dB SW2→45Ω, V ₁₆ =1.4V	1.5	3.0		V
Maximum Sensitivity	S/N	SW1→AM, V _{CC} =5.5V, SW2→8Ω, V _{IN} =37.5dB	15	20		dB
Power Output	P _{OUT}	SW2→8Ω, V _{CC} =5.5V, f=1KHZ V _R =Min. THD=10%	0.28			W
Total Harmonic Distortion	THD	SW2→45Ω, I _{CC} =42mA, f=1KHZ V _R =Min. V _{OUT} =2V		0.5	4.0	%
Voltage Gain	G _V	SW2→8Ω, V _{CC} =5.5V, f=1KHZ V _R =Min.		40		dB

INPUT - OUTPUT IMPEDANCE (T_a=25°C, V_{CC}=6V)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Pin 2 Input (AM)	R _{ip2(AM)}	f=465KHZ		200		KΩ
Impedance (AM)	C _{ip2(AM)}	f=465KHZ		3		pF
Pin 2 Input (FM)	R _{ip2(FM)}	f=10.7MHZ		30		KΩ
Impedance (FM)	C _{ip2(FM)}	f=10.7MHZ		3.5		pF
Pin 4 Output	R _{op4}	f=465KHZ		300		KΩ
Impedance	C _{op4}	f=465KHZ		6		pF
Pin 6 Input	R _{ip6}	f=1MHZ		50		KΩ
Impedance	C _{ip6}	f=1MHZ		5		pF
Pin 14 Input (AM)	R _{ip14(AM)}	f=465KHZ		300		KΩ
Impedance (AM)	C _{ip14(AM)}	f=465KHZ		3.5		pF
Pin14 Input (FM)	R _{ip14(FM)}	f=10.7MHZ		300		KΩ
Impedance (FM)	C _{ip14(FM)}	f=10.7MHZ		4		pF
Pin15 Output (AM)	R _{op15(AM)}	f=465KHZ		300		KΩ
Impedance (AM)	C _{op15(AM)}	f=465KHZ		5.5		pF
Pin15 Output (FM)	R _{op15(FM)}	f=10.7MHZ		300		KΩ
Impedance (FM)	C _{op15(FM)}	f=10.7MHZ		6		pF

UTC KA22427 LINEAR INTEGRATED CIRCUIT

TEST CIRCUIT

