



查询V330ME10供应商

Z-Communications, Inc.


9939 Via Pasar • San Diego, CA 92126
TEL (858) 621-2700 FAX (858) 621-2722

捷多邦, 专业PCB打样工厂, 24小时加急出货


V330ME10

VOLTAGE CONTROLLED OSCILLATOR

Rev A1

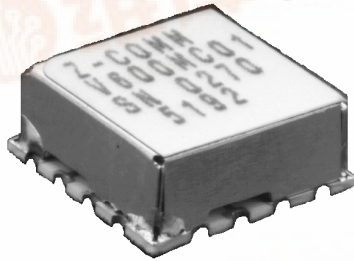

PHASE NOISE (1 Hz BW, typical)

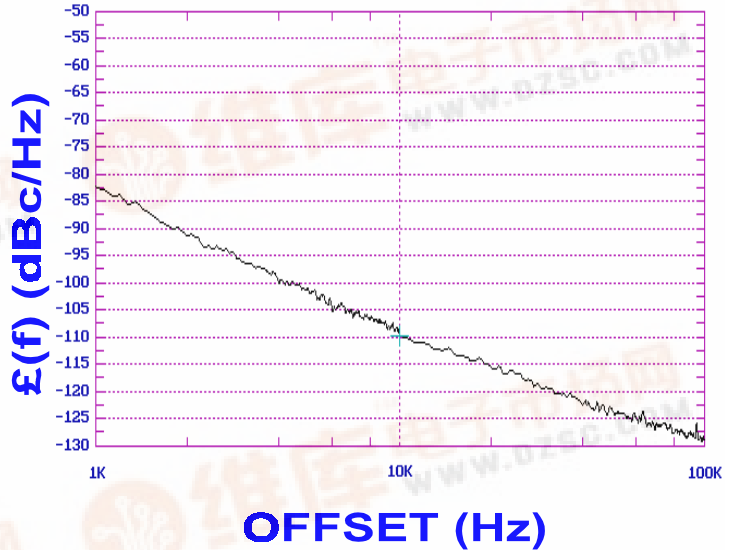

FEATURES	
• Frequency Range:	305 - 345 MHz
• Tuning Voltage:	0.5-4.5 Vdc
• MINI-16 - Style Package	

APPLICATIONS	
• Satellite Modems	
• Mobile Radios	
• CATV	

PERFORMANCE SPECIFICATIONS	VALUE	UNITS
Oscillation Frequency Range	305 - 345	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-108	dBc/Hz
Harmonic Suppression (2nd, typ.)	-10	dBc
Tuning Voltage	0.5-4.5	Vdc
Tuning Sensitivity (avg.)	21	MHz/V
Power Output	7±3	dBm
Load Impedance	50	Ω
Input Capacitance (max.)	100	pF
Pushing	<2	MHz/V
Pulling (14 dB Return Loss, Any Phase)	<5	MHz
Operating Temperature Range	-40 to 85	$^{\circ}\text{C}$
Package Style	MINI-16	

POWER SUPPLY REQUIREMENTS		
Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	12	mA


All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES	
• AN-100/1 : Mounting and Grounding of VCOs	
• AN-102 : Proper Output Loading of VCOs	
• AN-107 : How to Solder Z-COMM VCOs	


NOTES:



TUNING CURVE, typ.

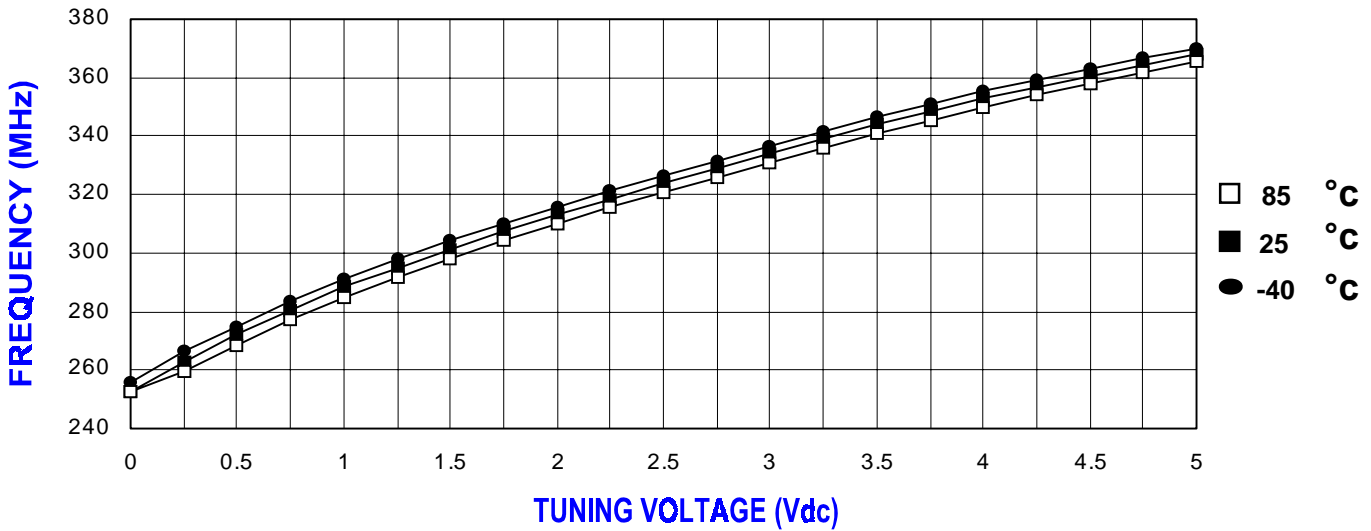

POWER CURVE, typ.

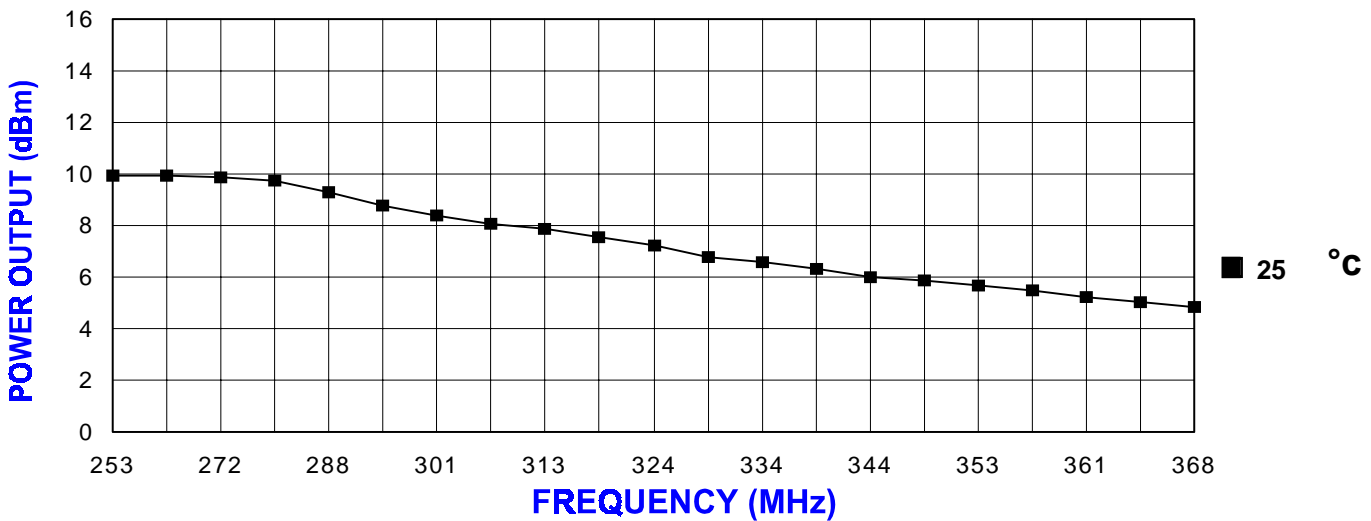

PHYSICAL DIMENSIONS

MINI-16
415-0061 REV. B
(DRAWING NOT TO SCALE)

