


**PHASE NOISE (1 Hz BW, typical)**

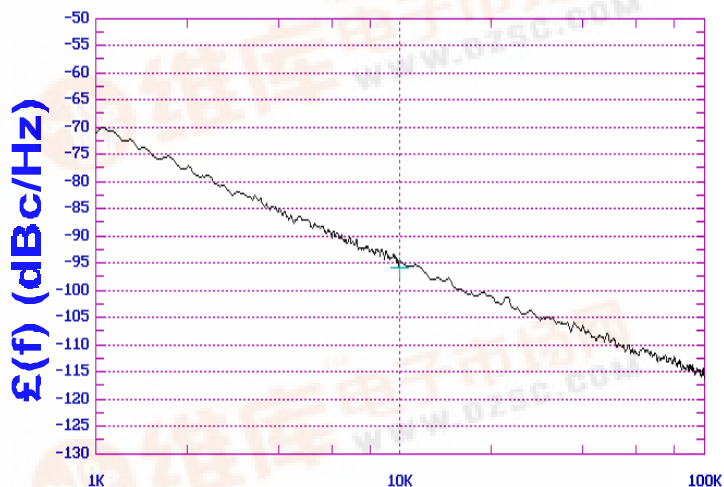

**OFFSET (Hz)**

**FEATURES**

- Frequency Range: 2200 - 2285 MHz
- Tuning Voltage: 0.5-4.5 Vdc
- MINI-14H- Style Package

**APPLICATIONS**

- WLAN
- Digital Radios
- Earthstations

**PERFORMANCE SPECIFICATIONS**

|                                             | VALUE       | UNITS  |
|---------------------------------------------|-------------|--------|
| Oscillation Frequency Range                 | 2200 - 2285 | MHz    |
| Phase Noise @ 10 kHz offset (1 Hz BW, typ.) | -94         | dBc/Hz |
| Harmonic Suppression (2nd, typ.)            | -10         | dBc    |
| Tuning Voltage                              | 0.5-4.5     | Vdc    |
| Tuning Sensitivity (avg.)                   | 53          | MHz/V  |
| Power Output                                | 4±3         | dBm    |
| Load Impedance                              | 50          | Ω      |
| Input Capacitance (max.)                    | 50          | pF     |
| Pushing                                     | <6          | MHz/V  |
| Pulling (14 dB Return Loss, Any Phase)      | <16         | MHz    |
| Operating Temperature Range                 | -30 to 85   | °C     |
| Package Style                               | MINI-14H    |        |
| POWER SUPPLY REQUIREMENTS                   |             |        |
| Supply Voltage (Vcc, nom.)                  | 4.5         | Vdc    |
| Supply Current (Icc, typ.)                  | 14          | mA     |

All specifications are typical unless otherwise noted and subject to change without notice.

**APPLICATION NOTES**

- AN-100/1 : Mounting and Grounding of VCOs
- AN-102 : Proper Output Loading of VCOs
- AN-107 : How to Solder Z-COMM VCOs

NOTES:

