


PHASE NOISE (1 Hz BW, typical)

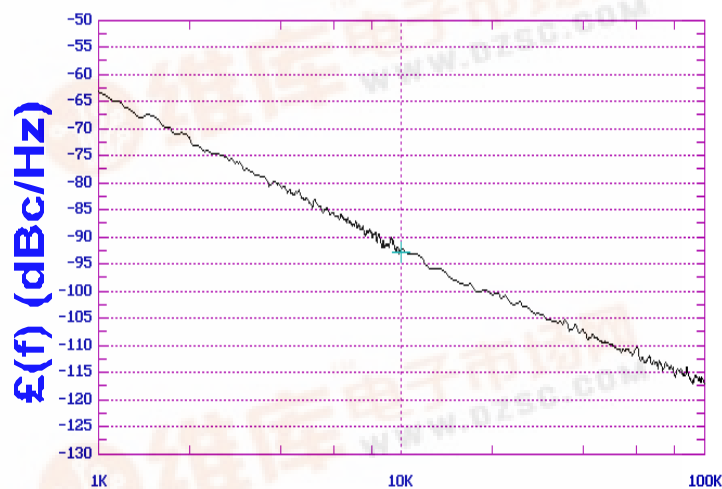

OFFSET (Hz)

FEATURES	
• Frequency Range:	1700 - 2496 MHz
• Tuning Voltage:	2-20 Vdc
• MINI-14S-L - Style Package	
APPLICATIONS	
• Satellite Communication Systems	
• Earthstations	
• Digital Radios	

PERFORMANCE SPECIFICATIONS	VALUE	UNITS
Oscillation Frequency Range	1700 - 2496	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-93	dBc/Hz
Harmonic Suppression (2nd, typ.)	-15	dBc
Tuning Voltage	2-20	Vdc
Tuning Sensitivity (avg.)	66	MHz/V
Power Output	7±3	dBm
Load Impedance	50	?
Input Capacitance (max.)	50	pF
Pushing	<5	MHz/V
Pulling (14 dB Return Loss, Any Phase)	<12	MHz
Operating Temperature Range	-10 to 85	°C
Package Style	MINI-14S-L	
POWER SUPPLY REQUIREMENTS		
Supply Voltage (Vcc, nom.)	10	Vdc
Supply Current (Icc, typ.)	25	mA


All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES
• AN-100/1 : Mounting and Grounding of VCOs
• AN-102 : Proper Output Loading of VCOs
• AN-107 : How to Solder Z-COMM VCOs


NOTES:

 PDF
 文库一下
 pdf.dzsc.com

TUNING CURVE, typ.

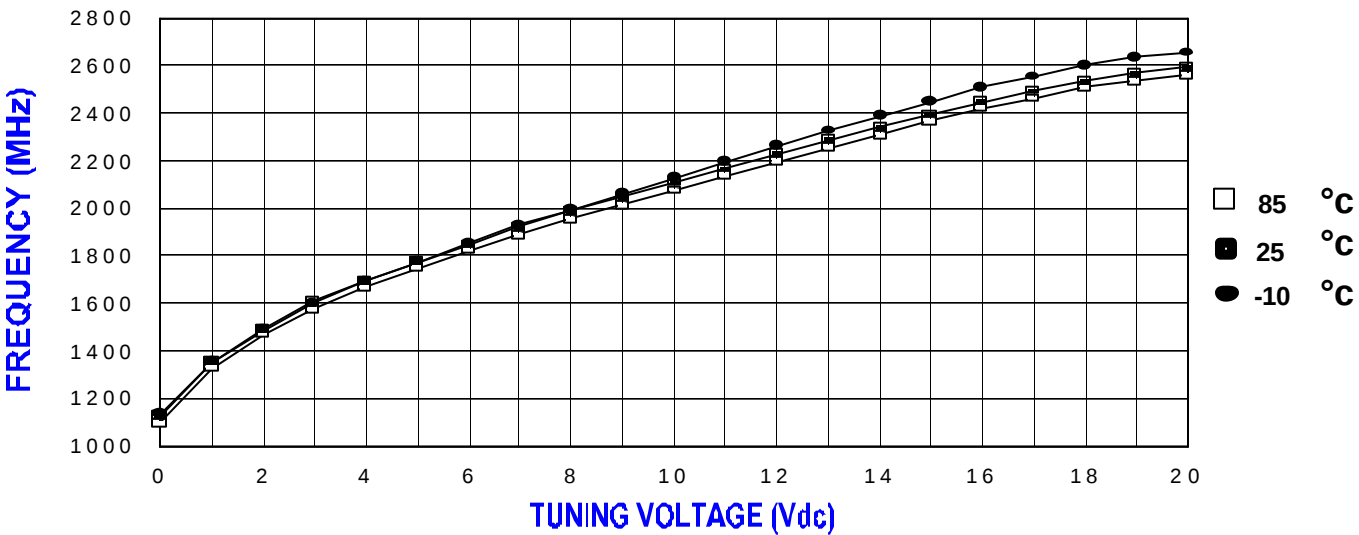



POWER CURVE, typ.

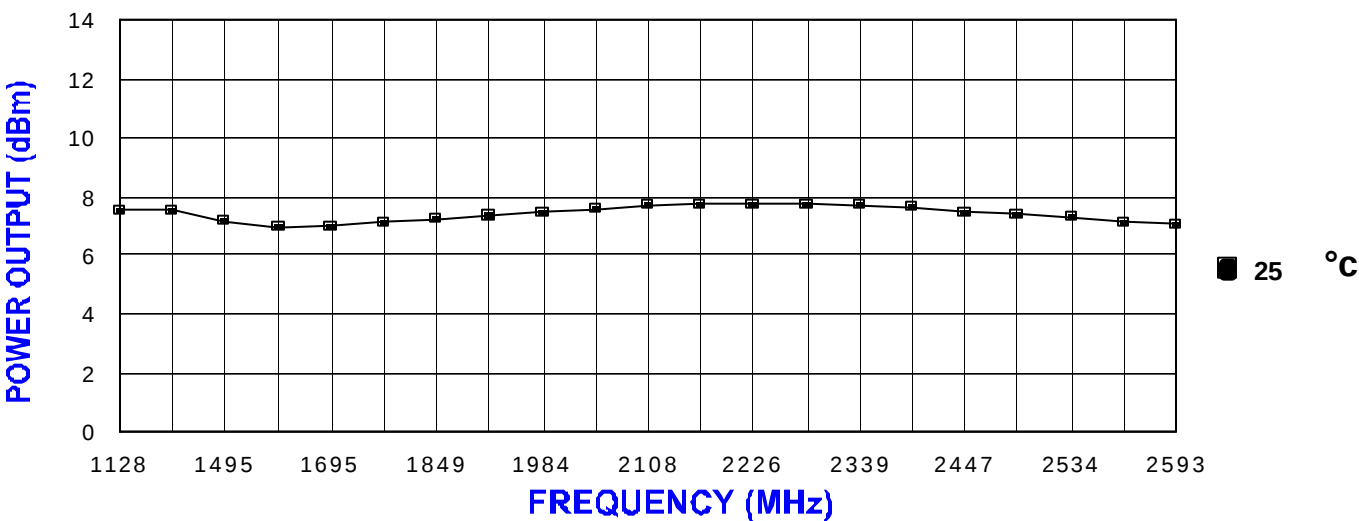

PHYSICAL DIMENSIONS

MINI-14S-L
415-0063 REV. B

(DRAWING NOT TO SCALE)

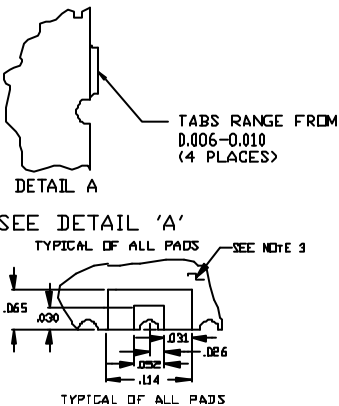

- NOTES:
1. THE INSIDE RADIUS OF ALL 14 HALF HOLES AT THE PERIMETER OF THE BOARD ARE SOLDER PLATED TO PROVIDE A SURFACE FOR THE ATTACHMENT OF THE VCD TO A MOTHERBOARD IN 8 LOCATIONS WITH 3 PADS BEING USED FOR ELECTROMECHANICAL INTERFACE, 14 SOLDER LOCATIONS REQUIRED.
 2. THE SURFACE OF THE SHIELD IS TIN PLATED AND MAY BE SOLDERED TO THE SHIELD'S BASE METAL IS BRASS.
 3. THE GROUND PLANE IS GROUND AND ATTACHES TO A GROUND TRACK ON THE UPPER SIDE OF THE BOARD AS WELL AS THE SHIELD BY PTH.
 4. UNLESS OTHERWISE NOTED ALL DIMENSIONS ARE IN INCHES.
 5. UNLESS OTHERWISE NOTED ALL TOLERANCES ARE AS FOLLOWS:
TOLERANCES
.XXX = ±.010
- P1=VT
P2=RF OUT
P3=Vcc

