



3.3V PROGRAMMABLE SKEW PLL CLOCK DRIVER TURBOCLOCK™ II JR.

IDT5V9950

FEATURES:

- Ref input is 5V tolerant
- 4 pairs of programmable skew outputs
- Low skew: 185ps same pair, 250ps all outputs
- Selectable positive or negative edge synchronization: Excellent for DSP applications
- Synchronous output enable
- Input frequency: 6MHz to 200MHz
- Output frequency: 6MHz to 200MHz
- 2x, 4x, 1/2, and 1/4 outputs
- 3-level inputs for skew and PLL range control
- PLL bypass for DC testing
- External feedback, internal loop filter
- 12mA balanced drive outputs
- Low Jitter: <100ps cycle-to-cycle
- Available in TQFP package


DESCRIPTION:

The IDT5V9950 is a high fanout 3.3V PLL based clock driver intended for high performance computing and data-communications applications. A key feature of the programmable skew is the ability of outputs to lead or lag the REF input signal. The IDT5V9950 has eight programmable skew outputs in four banks of 2. Skew is controlled by 3-level input signals that may be hard-wired to appropriate HIGH-MID-LOW levels.

When the \overline{sOE} pin is held low, all the outputs are synchronously enabled. However, if sOE is held high, all the outputs except 2Q0 and 2Q1 are synchronously disabled.

Furthermore, when PE is held high, all the outputs are synchronized with the positive edge of the REF clock input. When PE is held low, all the outputs are synchronized with the negative edge of REF. The IDT5V9950 has LVTTL outputs with 12mA balanced drive outputs.

FUNCTIONAL BLOCK DIAGRAM

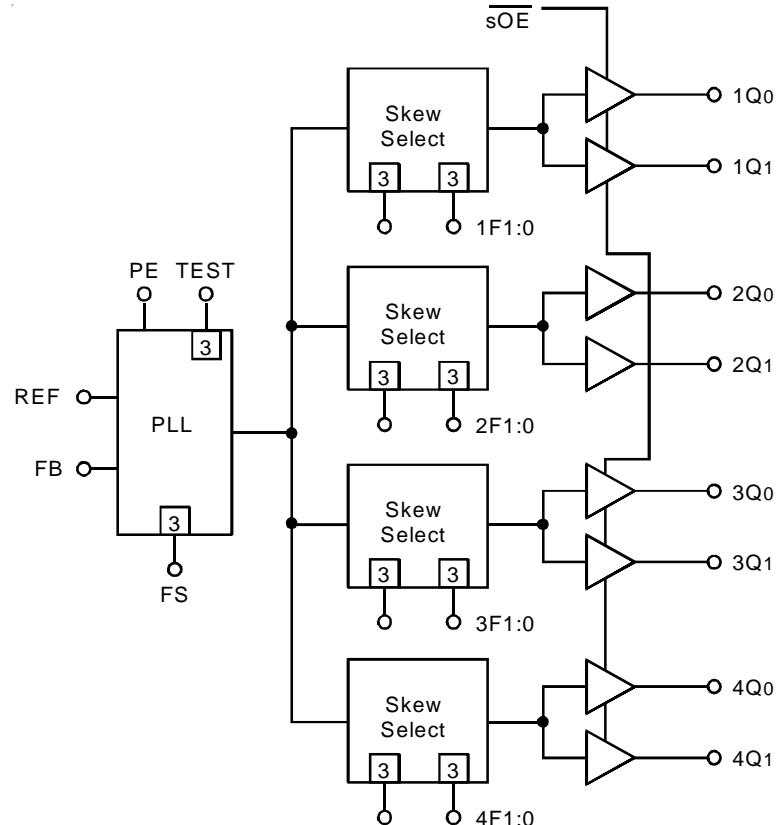


The IDT logo is a registered trademark of Integrated Device Technology, Inc.

INDUSTRIAL TEMPERATURE RANGE

FEBRUARY 2002

PIN CONFIGURATION

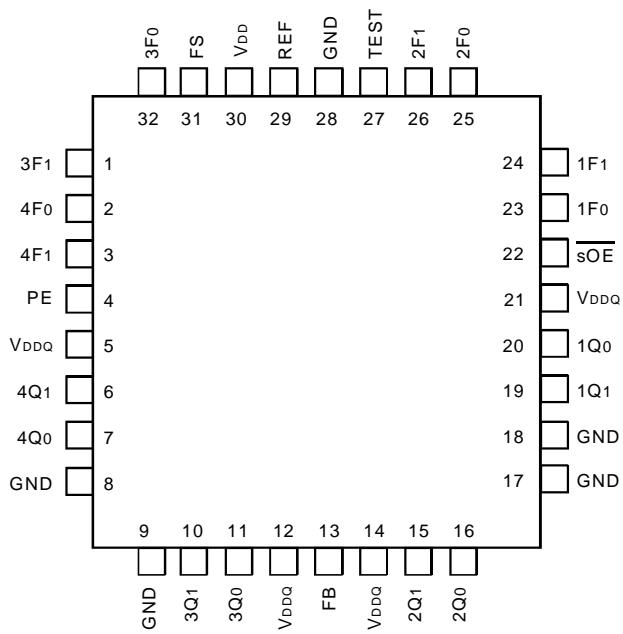

TOP VIEW

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

| Symbol | Description | | Max | Unit |
|-------------------|---------------------------|-----------|----------------------|------|
| V_{DDQ}, V_{DD} | Supply Voltage to Ground | | -0.5 to +4.6 | V |
| V_I | DC Input Voltage | | -0.5 to $V_{DD}+0.5$ | V |
| | REF Input Voltage | | -0.5 to +5.5 | V |
| | Maximum Power Dissipation | TA = 85°C | 0.7 | W |
| | | TA = 55°C | 1.1 | |
| TSTG | Storage Temperature Range | | -65 to +150 | °C |

NOTE:

1. Stresses beyond those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

CAPACITANCE (TA = +25°C, f = 1MHz, V_{IN} = 0V)

| Parameter | Description | Typ. | Max. | Unit |
|-----------------|-------------------|------|------|------|
| C _{IN} | Input Capacitance | 5 | 7 | pF |

NOTE:

1. Capacitance applies to all inputs except TEST, FS, nF[1:0], and DS[1:0].

PIN DESCRIPTION

| Pin Name | Type | Description |
|------------------------|------|--|
| REF | IN | Reference Clock Input |
| FB | IN | Feedback Input |
| TEST ⁽¹⁾ | IN | When MID or HIGH, disables PLL (except for conditions of Note 1). REF goes to all outputs. Skew Selections (See Control Summary Table) remain in effect. Set LOW for normal operation. |
| $\overline{sOE}^{(1)}$ | IN | Synchronous Output Enable. When HIGH, it stops clock outputs (except 2Q ₀ and 2Q ₁) in a LOW state (for PE = H) - 2Q ₀ and 2Q ₁ may be used as the feedback signal to maintain phase lock. When TEST is held at MID level and \overline{sOE} is HIGH, the nF[1:0] pins act as output disable controls for individual banks when nF[1:0] = LL. Set \overline{sOE} LOW for normal operation (has internal pull-down). |
| PE | IN | Selectable positive or negative edge control. When LOW/HIGH the outputs are synchronized with the negative/positive edge of the reference clock (has internal pull-up). |
| nF[1:0] | IN | 3-level inputs for selecting 1 of 9 skew taps or frequency functions |
| FS | IN | Selects appropriate oscillator circuit based on anticipated frequency range. (See Programmable Skew Range.) |
| nQ[1:0] | OUT | Four banks of two outputs with programmable skew |
| V _{DDQ} | PWR | Power supply for output buffers |
| V _{DD} | PWR | Power supply for phase locked loop, lock output, and other internal circuitry |
| GND | PWR | Ground |

NOTE:

1. When TEST = MID and \overline{sOE} = HIGH, PLL remains active with nF[1:0] = LL functioning as an output disable control for individual output banks. Skew selections remain in effect unless nF[1:0] = LL.

PROGRAMMABLE SKEW

Output skew with respect to the REF input is adjustable to compensate for PCB trace delays, backplane propagation delays or to accommodate requirements for special timing relationships between clocked components. Skew is selectable as a multiple of a time unit (tu) which ranges from 625ps to 1.3ns (see Programmable Skew Range and Resolution Table). There are nine skew configurations available for each output pair. These configurations are chosen by the nF_{1:0} control pins. In order

to minimize the number of control pins, 3-level inputs (HIGH-MID-LOW) are used, they are intended for but not restricted to hard-wiring. Undriven 3-level inputs default to the MID level. Where programmable skew is not a requirement, the control pins can be left open for the zero skew default setting. The Control Summary Table shows how to select specific skew taps by using the nF_{1:0} control pins.

EXTERNAL FEEDBACK

By providing external feedback, the IDT5V9950 gives users flexibility with regard to skew adjustment. The FB signal is compared with the input REF signal at the phase detector in order to drive the VCO. Phase differences cause the VCO of the PLL to adjust upwards or downwards accordingly.

An internal loop filter moderates the response of the VCO to the phase detector. The loop filter transfer function has been chosen to provide minimal jitter (or frequency variation) while still providing accurate responses to input frequency changes.

PROGRAMMABLE SKEW RANGE AND RESOLUTION TABLE

| | FS = LOW | FS = MID | FS = HIGH | Comments |
|--|----------------------------|----------------------------|---------------------------|-----------------|
| Timing Unit Calculation (tu) | 1/(32 x F _{NOM}) | 1/(16 x F _{NOM}) | 1/(8 x F _{NOM}) | |
| VCO Frequency Range (F _{NOM}) ^(1,2) | 24 to 50MHz | 48 to 100MHz | 96 to 200MHz | |
| Skew Adjustment Range ⁽³⁾ | | | | |
| Max Adjustment: | ±7.8125ns | ±7.8125ns | ±7.8125ns | ns |
| | ±67.5° | ±135° | ±270° | Phase Degrees |
| | ±18.75% | ±37.5% | ±75% | % of Cycle Time |
| Example 1, F _{NOM} = 25MHz | tu = 1.25ns | — | — | |
| Example 2, F _{NOM} = 37.5MHz | tu = 0.833ns | — | — | |
| Example 3, F _{NOM} = 50MHz | tu = 0.625ns | tu = 1.25ns | — | |
| Example 4, F _{NOM} = 75MHz | — | tu = 0.833ns | — | |
| Example 5, F _{NOM} = 100MHz | — | tu = 0.625ns | tu = 1.25ns | |
| Example 6, F _{NOM} = 150MHz | — | — | tu = 0.833ns | |
| Example 7, F _{NOM} = 200MHz | — | — | tu = 0.625ns | |

NOTES:

1. The device may be operated outside recommended frequency ranges without damage, but functional operation is not guaranteed.
2. The level to be set on FS is determined by the nominal operating frequency of the VCO and Time Unit Generator. The VCO frequency always appears at 1Q1:0, 2Q1:0, and the higher outputs when they are operated in their undivided modes. The frequency appearing at the REF and FB inputs will be the same as VCO when the output connected to FB is undivided. The frequency of the REF and FB inputs will be 1/2 or 1/4 the VCO frequency when the part is configured for frequency multiplication by using a divided output as the FB input.
3. Skew adjustment range assumes that a zero skew output is used for feedback. If a skewed Q output is used for feedback, then adjustment range will be greater. For example if a 4tu skewed output is used for feedback, all other outputs will be skewed -4tu in addition to whatever skew value is programmed for those outputs. 'Max adjustment' range applies to output pairs 3 and 4 where ± 6tu skew adjustment is possible and at the lowest F_{NOM} value.

CONTROL SUMMARY TABLE FOR FEEDBACK SIGNALS

| nF1:0 | Skew (Pair #1, #2) | Skew (Pair #3) | Skew (Pair #4) |
|-------------------|--------------------|----------------|-------------------------|
| LL ⁽¹⁾ | -4tu | Divide by 2 | Divide by 2 |
| LM | -3tu | -6tu | -6tu |
| LH | -2tu | -4tu | -4tu |
| ML | -1tu | -2tu | -2tu |
| MM | Zero Skew | Zero Skew | Zero Skew |
| MH | 1tu | 2tu | 2tu |
| HL | 2tu | 4tu | 4tu |
| HM | 3tu | 6tu | 6tu |
| HH | 4tu | Divide by 4 | Inverted ⁽²⁾ |

NOTES:

1. LL disables outputs if TEST = MID and \overline{sOE} = HIGH.2. When pair #4 is set to HH (inverted), sOE disables pair #4 HIGH when PE = HIGH, \overline{sOE} disables pair #4 LOW when PE = LOW.

RECOMMENDED OPERATING RANGE

| Symbol | Description | Min. | Typ. | Max. | Unit |
|-----------------------------------|-------------------------------|------|------|------|------|
| V _{DD} /V _{DDQ} | Power Supply Voltage | 3 | 3.3 | 3.6 | V |
| T _A | Ambient Operating Temperature | -40 | +25 | +85 | °C |

DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

| Symbol | Parameter | Conditions | | Min. | Max. | Unit |
|------------------|--|--|------------|------------------------|------------------------|------|
| V _{IH} | Input HIGH Voltage | Guaranteed Logic HIGH (REF, FB Inputs Only) | | 2 | — | V |
| V _{IL} | Input LOW Voltage | Guaranteed Logic LOW (REF, FB Inputs Only) | | — | 0.8 | V |
| V _{IHH} | Input HIGH Voltage ⁽¹⁾ | 3-Level Inputs Only | | V _{DD} –0.6 | — | V |
| V _{IMM} | Input MID Voltage ⁽¹⁾ | 3-Level Inputs Only | | V _{DD} /2–0.3 | V _{DD} /2+0.3 | V |
| V _{ILL} | Input LOW Voltage ⁽¹⁾ | 3-Level Inputs Only | | — | 0.6 | V |
| I _{IN} | Input Leakage Current (REF, FB Inputs Only) | V _{IN} = V _{DD} or GND V _{DD} = Max. | | –5 | +5 | µA |
| I ₃ | 3-Level Input DC Current (TEST, FS, nF[1:0]) | V _{IN} = V _{DD} | HIGH Level | — | +200 | µA |
| | | V _{IN} = V _{DD} /2 | MID Level | –50 | +50 | |
| | | V _{IN} = GND | LOW Level | –200 | — | |
| I _{PU} | Input Pull-Up Current (PE) | V _{DD} = Max., V _{IN} = GND | | –100 | — | µA |
| I _{PD} | Input Pull-Down Current (\overline{sOE}) | V _{DD} = Max., V _{IN} = V _{DD} | | — | +100 | µA |
| V _{OH} | Output HIGH Voltage | V _{DDQ} = Min., I _{OH} = –12mA | | 2.4 | — | V |
| V _{OL} | Output LOW Voltage | V _{DDQ} = Min., I _{OL} = 12mA | | — | 0.4 | V |

NOTE:

- These inputs are normally wired to V_{DD}, GND, or unconnected. Internal termination resistors bias unconnected inputs to V_{DD}/2. If these inputs are switched, the function and timing of the outputs may be glitched, and the PLL may require an additional t_{LOCK} time before all datasheet limits are achieved.

POWER SUPPLY CHARACTERISTICS

| Symbol | Parameter | Test Conditions ⁽¹⁾ | Typ. ⁽²⁾ | Max. | Unit |
|------------------|---|---|---------------------|------|-------------|
| I _{DDQ} | Quiescent Power Supply Current | V _{DD} = Max., TEST = MID, REF = LOW, PE = LOW, \overline{SOE} = LOW, FS = MID All outputs unloaded | 20 | 30 | mA |
| ΔI_{DD} | Power Supply Current per Input HIGH (REF and FB inputs only) | V _{IN} = 3V, V _{DD} = Max., TEST = HIGH | 1 | 30 | μ A |
| I _{DDD} | Dynamic Power Supply Current per Output | FS = L | 190 | 290 | μ A/MHz |
| | | FS = M | 150 | 230 | |
| | | FS = H | 130 | 200 | |
| I _{TOT} | Total Power Supply Current | FS = L, F _{VCO} = 50MHz, C _L = 0pF | 56 | — | mA |
| | | FS = M, F _{VCO} = 100MHz, C _L = 0pF | 80 | — | |
| | | FS = H, F _{VCO} = 200MHz, C _L = 0pF | 125 | — | |

NOTES:

1. Measurements are for divide-by-1 outputs and nF[1:0] = MM.

2. For nominal voltage and temperature.

INPUT TIMING REQUIREMENTS

| Symbol | Description ⁽¹⁾ | | Min. | Max. | Unit |
|---------------------------------|---|-----------|------|------|------|
| t _R , t _F | Maximum input rise and fall times, 0.8V to 2V | | — | 10 | ns/V |
| t _{PWC} | Input clock pulse, HIGH or LOW | | 2 | — | ns |
| D _H | Input duty cycle | | 10 | 90 | % |
| F _{REF} | Reference clock input frequency | FS = LOW | 6 | 50 | MHz |
| | | FS = MID | 12 | 100 | |
| | | FS = HIGH | 24 | 200 | |

NOTE:

1. Where pulse width implied by D_H is less than t_{PWC} limit, t_{PWC} limit applies.



SWITCHING CHARACTERISTICS OVER OPERATING RANGE

| Symbol | Parameter | Min. | Typ. | Max. | Unit | |
|---------------------|--|---------------------------|--|------|------|--|
| F _{NOM} | VCO Frequency Range | | See Programmable Skew Range and Resolution Table | | | |
| t _{RPWH} | REF Pulse Width HIGH ⁽¹⁾ | 2 | — | — | ns | |
| t _{RPWL} | REF Pulse Width LOW ⁽¹⁾ | 2 | — | — | ns | |
| t _u | Programmable Skew Time Unit | See Control Summary Table | | | | |
| t _{SKewPR} | Zero Output Matched-Pair Skew (xQ0, xQ1) ^(2,3) | — | 50 | 185 | ps | |
| t _{SKewO} | Zero Output Skew (All Outputs) ⁽⁴⁾ | — | 0.1 | 0.25 | ns | |
| t _{SKew1} | Output Skew (Rise-Rise, Fall-Fall, Same Class Outputs) ⁽⁵⁾ | — | 0.1 | 0.25 | ns | |
| t _{SKew2} | Output Skew (Rise-Fall, Nominal-Inverted, Divided-Divided) ⁽⁵⁾ | — | 0.2 | 0.5 | ns | |
| t _{SKew3} | Output Skew (Rise-Rise, Fall-Fall, Different Class Outputs) ⁽⁵⁾ | — | 0.15 | 0.5 | ns | |
| t _{SKew4} | Output Skew (Rise-Fall, Nominal-Divided, Divided-Inverted) ⁽²⁾ | — | 0.3 | 0.9 | ns | |
| t _{DEV} | Device-to-Device Skew ^(2,6) | — | — | 0.75 | ns | |
| t _(φ) | REF Input to FB Static Phase Offset ⁽⁷⁾ | —0.25 | — | 0.25 | ns | |
| t _{ODCV} | Output Duty Cycle Variation from 50% | —1 | 0 | 1 | ns | |
| t _{PH} | Output HIGH Time Deviation from 50% ⁽⁸⁾ | — | — | 1.5 | ns | |
| t _{PWL} | Output LOW Time Deviation from 50% ⁽⁹⁾ | — | — | 2 | ns | |
| t _{ORISE} | Output Rise Time | 0.15 | 0.7 | 1.5 | ns | |
| t _{OFALL} | Output Fall Time | 0.15 | 0.7 | 1.5 | ns | |
| t _{LOCK} | PLL Lock Time ⁽¹⁰⁾ | — | — | 0.5 | ms | |
| t _{CCJH} | Cycle-to-Cycle Output Jitter (peak-to-peak) (divide by 1 output frequency, FS = H, FB divide-by-n=1,2) | — | — | 100 | ps | |
| t _{CCJM} | Cycle-to-Cycle Output Jitter (peak-to-peak) (divide by 1 output frequency, FS = M) | — | — | 150 | | |
| t _{CCJL} | Cycle-to-Cycle Output Jitter (peak-to-peak) (divide by 1 output frequency, FS = L, F _{REF} > 3MHz) | — | — | 200 | | |


NOTES:

1. Refer to Input Timing Requirements table for more detail.
2. Skew is the time between the earliest and the latest output transition among all outputs for which the same tu delay has been selected when all are loaded with the specified load.
3. t_{SKewPR} is the skew between a pair of outputs (xQ0 and xQ1) when all eight outputs are selected for 0tu.
4. t_{SK(φ)} is the skew between outputs when they are selected for 0tu.
5. There are 3 classes of outputs: Nominal (multiple of tu delay), Inverted (4Q0 and 4Q1 only with 4F0 = 4F1 = HIGH), and Divided (3Qx and 4Qx only in Divide-by-2 or Divide-by-4 mode). Test condition: nF0:1=MM is set on unused outputs.
6. t_{DEV} is the output-to-output skew between any two devices operating under the same conditions (V_{DDO}, V_{DD}, ambient temperature, air flow, etc.)
7. t_(φ) is measured with REF input rise and fall times (from 0.8V to 2V) of 0.5ns. Measured from 1.5V on REF to 1.5V on FB.
8. Measured at 2V.
9. Measured at 0.8V.
10. t_{LOCK} is the time that is required before synchronization is achieved. This specification is valid only after V_{DDO}/V_{DD} is stable and within normal operating limits. This parameter is measured from the application of a new signal or frequency at REF or FB until t_{PD} is within specified limits.

AC TEST LOADS AND WAVEFORMS

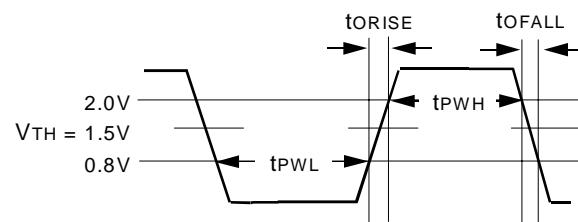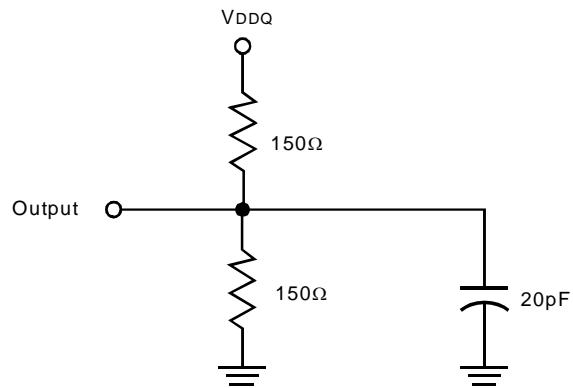


LVTTL Output Waveform

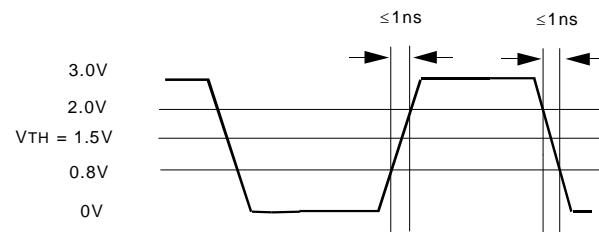

LVTTL Input Test Waveform

AC TIMING DIAGRAM

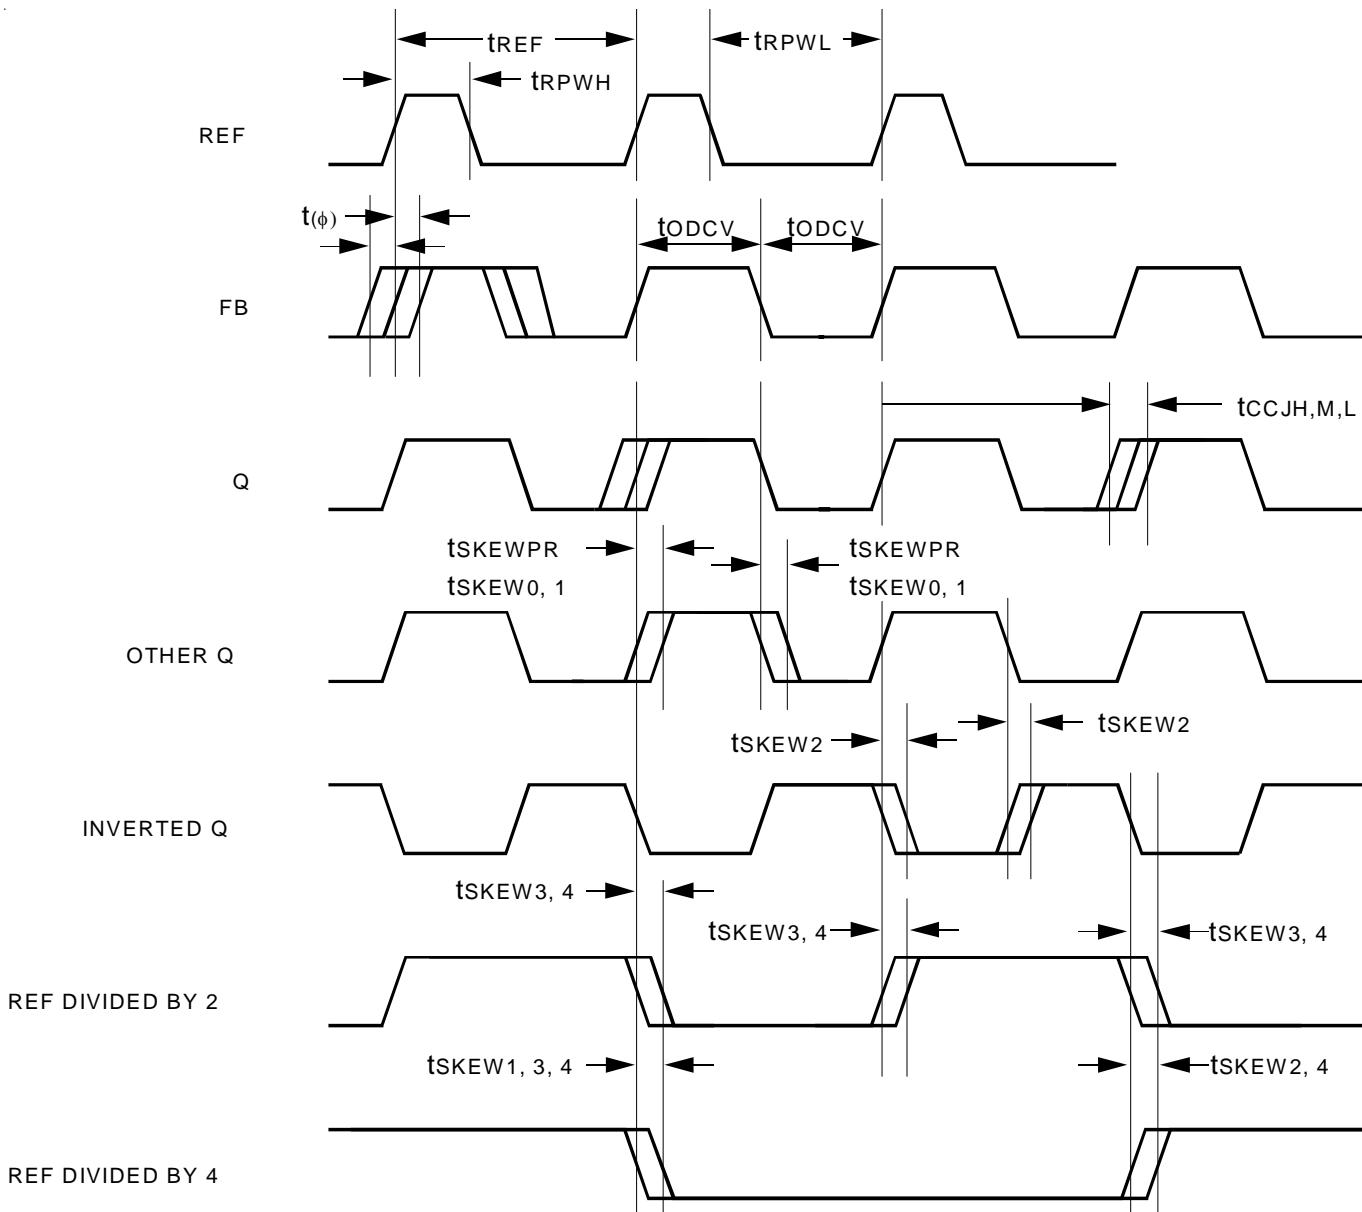

NOTES:

PE: The AC Timing Diagram applies to PE=V_{DD}. For PE=GND, the negative edge of FB aligns with the negative edge of REF, divided outputs change on the negative edge of REF, and the positive edges of the divide-by-2 and the divide-by-4 signals align.

Skew: The time between the earliest and the latest output transition among all outputs for which the same *t_U* delay has been selected when all are loaded with 20pF and terminated with 75Ω to V_{DD}/2.

tSKEWPR: The skew between a pair of outputs (x_{Q0} and x_{Q1}) when all eight outputs are selected for 0t_U.

tSKEW0: The skew between outputs when they are selected for 0t_U.

tDEV: The output-to-output skew between any two devices operating under the same conditions (V_{DD0}, V_{DD}, ambient temperature, air flow, etc.)

tODCV: The deviation of the output from a 50% duty cycle. Output pulse width variations are included in tSKEW2 and tSKEW4 specifications.

t_{PWH} is measured at 2V.


t_{PWL} is measured at 0.8V.

t_{RISE} and t_{FALL} are measured between 0.8V and 2V.

LOCK: The time that is required before synchronization is achieved. This specification is valid only after V_{DD}/V_{DD0} is stable and within normal operating limits. This parameter is measured from the application of a new signal or frequency at REF or FB until t_{PD} is within specified limits.

ORDERING INFORMATION

IDT XXXXX XX X
Device Type Package Package

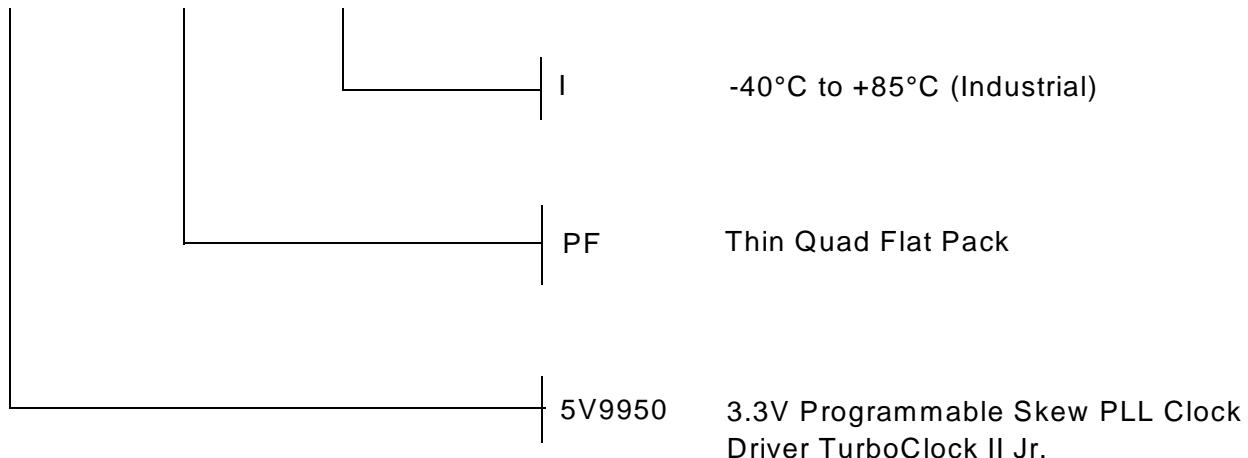

CORPORATE HEADQUARTERS

2975 Stender Way
Santa Clara, CA 95054

for SALES:

800-345-7015 or 408-727-6116
fax: 408-492-8674
www.idt.com

for Tech Support:

logichelp@idt.com
(408) 654-6459

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com