NYLON 6/6 (RMS-01) COLOR: NATURAL PART NO.	UV STABILIZED (RMS-46) COLOR: BLACK PART NO.	MAX. BUNDLE DIA.	LENGTH "L" APPROX.	NYLON 6/6 FLAME RET. (RMS-75A), UL94-V0 COLOR: WHITE TO ORDER ADD "-V0" TO P/N	NYLON 4/6 (RMS-109) HI TEMPERATURE COLOR: NATURAL TO ORDER ADD "-HT" TO P/N (NOTE 3.)	NYLON 6/6 (RMS-73) LOW TEMPERATURE COLOR: BLACK TO ORDER ADD "-ST" TO P/N	NYLON 6/6 HEAT STABILIZED (RMS-47) UL 94-V2 COLOR: BLACK TO ORDER ADD "-HS" TO P/N	NYLON 6/6 (RMS-01) MIL-SPEC S-23190 COLOR: NATURAL TO ORDER ADD "-MIL" TO P/N	UV STABILIZED (RMS-46) MIL-SPEC S-23190 COLOR:BLACK TO ORDER ADD "-UVB-MIL" TO P/N	COLOR (NOTE 2.)
WIT-50S	WIT-50S-UVB	1-1/2 (38.1)	6.0 (152.4)	SPECIAL	SPECIAL	SPECIAL	SPECIAL	N/A	N/A	SPECIAL
WIT-50R	WIT-50R-UVB	2 (50.8)	8.0 (203.2)	STANDARD	STANDARD	STANDARD	STANDARD	MS3367-1-9	MS3367-1-0	STANDARD
WIT-50L	WIT-50L-UVB	4-1/2 (114.3)	15.40 (391.2)	SPECIAL	N/A			MS3367-2-9	MS3367-2-0	SPECIAL

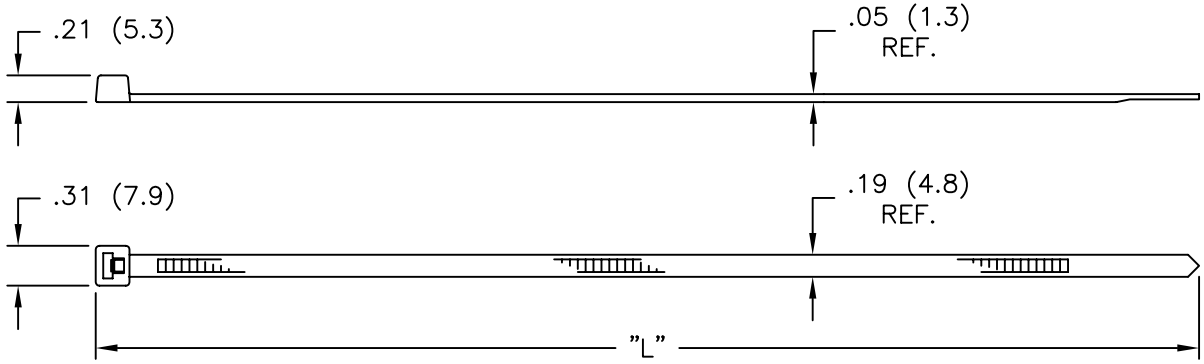

NOTES:
1. MIN. LOOP TENSILE: 50 lbs

2. COLORS: GREEN (-GN), BLUE (-BL), YELLOW (-YL), RED (-RD), NEON-GREEN (-NGN), NEON-YELLOW (-NYL), NEON-PINK (-NPK) AND NEON-ORANGE (-NOR), TO ORDER, ADD COLOR SUFFIX TO PART NO.

3. MATERIAL HAS A UL RELATIVE THERMAL INDEX OF 266°F (130°C)

REV	DESCRIPTION	ENGR DATE
E	ADDED MAT'L INFO TO TABLE AND NOTES PER CATALOG	SM 05.06.02
D	UPDATED TABLE AND MAT'L NOTES	SM 04.23.02
C	CHANGED FILE NO.	SM 04.01.02
B	DIM. "L" FOR WIT-50L CHANGED TO 15.4	J.L. 05.01.00
A	MAT'L RMS-46 ADDED	J.L. 06.03.98

TITLE: WIT—50 SERIES

DWG IN IN (MM)

TOLERANCES UNLESS NOTED .XX=±.010 .XXX=±.005 FRAC=±1/64 ANG=±1°

FILE # WIT-50X | DWN: P.B. | APP:

MAT'L: SEE NOTES & TABLE | DT: 08-09-95 | DT:

RE: RICHCO, INC.

RICHCO INC.
PO BOX 804238,CHICAGO,60680
(773) 539-4060

FINAL

PART # SEE TABLE

PRINT TYPE CA