

EVALUATION KIT
AVAILABLE

MAXIM

±15kV ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

General Description


The MAX1233/MAX1234 are complete PDA controllers in a 5mm × 5mm, 28-pin QFN package. They feature a 12-bit analog-to-digital converter (ADC), low on-resistance switches for driving resistive touch screens, an internal +1.0V/+2.5V or external reference, ±2°C accurate, on-chip temperature sensor, direct +6V battery monitor, keypad controller, 8-bit digital-to-analog converter (DAC), and a synchronous serial interface. Each of the keypad controllers' eight row and column inputs can be reconfigured as general-purpose parallel I/O pins (GPIO). All analog inputs are fully ESD protected, eliminating the need for external TransZorb™ devices.

The MAX1233/MAX1234 offer programmable resolution and sampling rates. Interrupts from the devices alert the host processor when data is ready, when the screen is touched, or a key press is detected. Software-configurable scan control and internal timers give the user flexibility without burdening the host processor. These devices consume only 260µA at the maximum sampling rate of 50ksps. Supply current falls to below 50µA for sampling rates of 10ksps. The MAX1233/MAX1234 are guaranteed over the -40°C to +85°C temperature range.

Applications

Personal Digital Assistants
Pagers
Touch-Screen Monitors
Cellular Phones
MP3 Players
Portable Instruments
Point-of-Sale Terminals

Pin Configuration

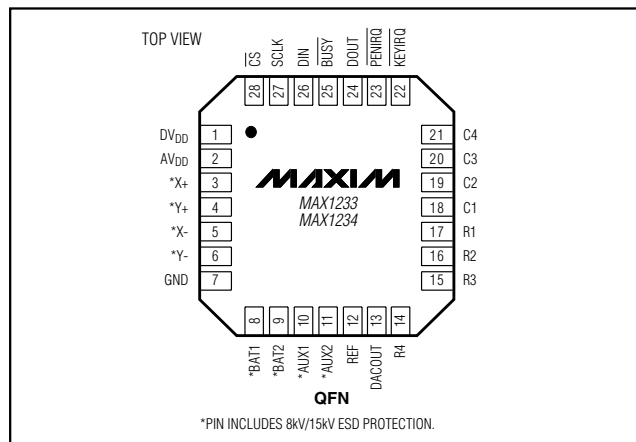

Features

- ◆ ESD-Protected Analog Inputs
 - ±15kV IEC 1000-4-2 Air-Gap Discharge
 - ±8kV IEC 1000-4-2 Contact Discharge
- ◆ Single-Supply Operation
 - +2.7V to +3.6V (MAX1233)
 - +4.75V to +5.25V (MAX1234)
- ◆ 4-Wire Touch-Screen Interface
- ◆ Internal +1.0V/+2.5V Reference or External Reference (+1.0V to AVDD)
- ◆ SPI™/QSPI™/MICROWIRE™-Compatible 10MHz Serial Interface
- ◆ 12-Bit, 50ksps ADC Measures
 - Resistive Touch-Screen Position and Pressure
 - Two Auxiliary Analog Inputs
 - Two Battery Voltages (0.5V to 6V)
 - On-Chip Temperature
- ◆ 8-Bit DAC for LCD Bias Control
- ◆ 4 × 4 Keypad Programmable Controller Offers Up to Eight GPIO Pins
- ◆ Automatic Detection of Screen Touch, Key Press, and End of Conversion
- ◆ Programmable 8-, 10-, 12-Bit Resolution
- ◆ Programmable Conversion Rates
- ◆ AutoShutdown™ Between Conversions
- ◆ Low Power
 - 260µA at 50ksps
 - 50µA at 10ksps
 - 6µA at 1ksps
 - 0.3µA Shutdown Current
- ◆ 28-Pin 5mm × 5mm QFN Package

Ordering Information

| PART | TEMP RANGE | PIN-PACKAGE |
|------------|----------------|--------------------|
| MAX1233EGI | -40°C to +85°C | 28 QFN (5mm × 5mm) |
| MAX1234EGI | -40°C to +85°C | 28 QFN (5mm × 5mm) |

TransZorb is a trademark of General Semiconductor Industries, Inc.

SPI and QSPI are trademarks of Motorola, Inc.

MICROWIRE is a trademark of National Semiconductor Corp.

AutoShutdown is a trademark of Maxim Integrated Products, Inc.

MAXIM

Maxim Integrated Products 1

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

MAX1233/MAX1234

±15kV ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

ABSOLUTE MAXIMUM RATINGS

AV_{DD} to GND-0.3V to +6V
 DV_{DD} to AV_{DD}-0.3V to +0.3V
 Digital Inputs/Outputs to GND-0.3V to (DV_{DD} + 0.3V)
 X+, Y+, X-, Y-, AUX1, AUX2,
 and REF to GND-0.3V to (AV_{DD} + 0.3V)
 BAT1, BAT2 to GND-0.3V to +6V
 Maximum ESD per IEC 1000-4-2 (per MIL STD-883 HBM)
 X+, X-, Y+, Y-, AUX1, AUX2, BAT1, BAT2.....±15kV

All Other Pins±2.5kV
 Maximum Current into Any Pin.....50mA
 Continuous Power Dissipation (T_A = +70°C)
 28-Pin QFN (derate 28.5mW/°C above +70°C)2W
 Operating Temperature Range-40°C to +85°C
 Storage Temperature Range-60°C to +150°C
 Lead Temperature (soldering, 10s)+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(DV_{DD} = AV_{DD} = +2.7V to +3.6V (MAX1233), DV_{DD} = AV_{DD} = +4.75V to +5.25V (MAX1234), external reference V_{REF} = 2.5V (MAX1233), V_{REF} = 4.096V (MAX1234); f_{SCLK} = 10MHz, f_{SAMPLE} = 50ksps, 12-bit mode, 0.1µF capacitor at REF, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at T_A = +25°C.)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|--|--------|-----------------------------------|---|------|-----|-----|--------|
| ANALOG-TO-DIGITAL CONVERTER | | | | | | | |
| DC ACCURACY (Note 1) | | | | | | | |
| Resolution | | Software-programmable 8/10/12 bit | | 12 | | | Bits |
| No Missing Codes | | | | 11 | | | Bits |
| Relative Accuracy (Note 2) | INL | 12-bit mode | | ±0.8 | ±2 | | LSB |
| | | 10-bit and 8-bit modes | | ±0.5 | | | |
| Differential Nonlinearity | DNL | 12-bit mode | | ±0.8 | ±2 | | LSB |
| | | 10-bit and 8-bit modes | | ±0.5 | | | |
| Offset Error | | 12-bit mode | | ±0.5 | ±4 | | LSB |
| | | 10-bit and 8-bit modes | | ±0.5 | | | |
| Gain Error (Note 3) | | 12-bit mode | | ±0.5 | ±4 | | LSB |
| | | 10-bit mode | | ±0.5 | | | |
| | | 8-bit mode | | ±0.5 | | | |
| Total Unadjusted Error | TUE | 12-bit mode | | ±2 | | | LSB |
| | | 10-bit and 8-bit modes | | ±1 | | | |
| Offset Temperature Coefficient | | | | ±0.4 | | | ppm/°C |
| Gain Temperature Coefficient | | | | ±0.4 | | | ppm/°C |
| Channel-to-Channel Offset | | | | ±0.1 | | | LSB |
| Channel-to-Channel Gain Matching | | | | ±0.1 | | | LSB |
| Noise | | Including internal VREF | | 50 | | | μVRMS |
| Power-Supply Rejection | PSR | Full-scale input | MAX1233 AVDD = DVDD = +2.7V to +3.6V | ±0.4 | | | mV |
| | | | MAX1234 AVDD = DVDD = +5V ±5% | ±0.3 | | | |
| DYNAMIC SPECIFICATIONS (1kHz SINE WAVE, VIN = 2.5Vp-p FOR MAX1233, VIN = 4.096Vp-p FOR MAX1234, 50ksps, fSCLK = 10MHz) | | | | | | | |
| Signal-to-Noise Plus Distortion | SINAD | | | 69 | | | dB |

±15kV ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

ELECTRICAL CHARACTERISTICS (continued)

(DV_{DD} = AV_{DD} = +2.7V to +3.6V (MAX1233), DV_{DD} = AV_{DD} = +4.75V to +5.25V (MAX1234), external reference V_{REF} = 2.5V (MAX1233), V_{REF} = 4.096V (MAX1234); f_{SCLK} = 10MHz, f_{SAMPLE} = 50ksps, 12-bit mode, 0.1μF capacitor at REF, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at T_A = +25°C.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--|--------|--|-------|-------|-------|--------|
| Total Harmonic Distortion | THD | | | -84 | | dB |
| Spurious-Free Dynamic Range | SFDR | | | 84 | | dB |
| Full-Power Bandwidth | | -3dB point | | 0.5 | | MHz |
| Full-Linear Bandwidth | | SINAD > 67dB | | 50 | | kHz |
| CONVERSION RATE | | | | | | |
| Internal Oscillator Frequency | | | 8 | | 11.5 | MHz |
| Aperture Delay | | | | 30 | | ns |
| Aperture Jitter | | | | <50 | | ps |
| Maximum Serial Clock Frequency | fSCLK | | 10 | | | MHz |
| Duty Cycle | | | 30 | | 70 | % |
| AUXILIARY ANALOG INPUTS (AUX1, AUX2) | | | | | | |
| Input Voltage Range | | | 0 | | VREF | V |
| Input Leakage Current | | Channel not selected or conversion stopped | | ±0.1 | ±1 | µA |
| Input Capacitance | | | | 34 | | pF |
| BATTERY MONITOR INPUTS (BAT1, BAT2) | | | | | | |
| Input Voltage Range | | | 0.5 | | 6.0 | V |
| Input Impedance | | Sampling battery | | 10 | | kΩ |
| | | Battery monitor OFF | | 1 | | GΩ |
| Accuracy | | Internal reference | -3 | | +3 | % |
| TEMPERATURE MEASUREMENT | | | | | | |
| Temperature Range | | | -40 | | +85 | °C |
| Resolution | | Differential method (Note 4) | | 1.6 | | °C |
| | | Single measurement method (Note 5) | | 0.3 | | |
| Accuracy | | Differential method (Note 4) | | ±3 | | °C |
| | | Single measurement method (Note 5) | | ±2 | | |
| INTERNAL ADC REFERENCE | | | | | | |
| Reference Output Voltage | VREF | 2.5V mode, TA = +25°C | 2.470 | 2.500 | 2.530 | V |
| | | 1.0V mode, TA = +25°C | 0.980 | 1.000 | 1.020 | |
| Output Tempco | TCVREF | | | 60 | | ppm/°C |
| Reference Output Impedance | | Normal operation | | 250 | | Ω |
| Reference Short-Circuit Current | | | | 18 | | mA |
| EXTERNAL ADC REFERENCE (INTERNAL REFERENCE DISABLED, REFERENCE APPLIED TO REF) | | | | | | |
| Reference Input Voltage Range | | (Note 6) | 1.0 | | VDD | V |
| Input Impedance | | CS = GND or VDD | | 1 | | GΩ |
| Input Current | | VREF = +2.5V at 50ksps (MAX1233) | | 5 | 10 | µA |
| | | VREF = +4.096V at 50ksps (MAX1234) | | 8 | 15 | |
| | | Shutdown/between conversions | | ±0.1 | | |

±15kV ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

ELECTRICAL CHARACTERISTICS (continued)

(DV_{DD} = AV_{DD} = +2.7V to +3.6V (MAX1233), DV_{DD} = AV_{DD} = +4.75V to +5.25V (MAX1234), external reference V_{REF} = 2.5V (MAX1233), V_{REF} = 4.096V (MAX1234); f_{SCLK} = 10MHz, f_{SAMPLE} = 50ksps, 12-bit mode, 0.1μF capacitor at REF, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at T_A = +25°C.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--|---------------------|-------------------------------------|-------------------------|------------------------|-------------------------|--------|
| DIGITAL-TO-ANALOG CONVERTER | | | | | | |
| DC ACCURACY | | | | | | |
| Resolution | | | 8 | | | Bits |
| Integral Linearity Error | INL | (Note 7) | ±1.0 | | | LSB |
| Differential Linearity Error | DNL | No missing codes | ±1.0 | | | LSB |
| Offset Error | V _{OS} | (Note 8) | ±1 | ±25 | mV | |
| Offset Error Temperature Coefficient | | | 1 | | | ppm/°C |
| Full-Scale Error | | Code = 255, no load | 5 | | | % |
| Full-Scale Error Temperature Coefficient | | Code = 255, no load | ±10 | | | ppm/°C |
| DYNAMIC PERFORMANCE | | | | | | |
| Voltage Output Slew Rate | | Positive and negative | 0.4 | | | V/μs |
| Output Settling Time | | 0.5LSB; 50kΩ and 50pF load (Note 9) | 20 | | | μs |
| Glitch Impulse | | Code 127 to 128 | 40 | | | nV/s |
| Wake-Up Time | | From shutdown | 50 | | | μs |
| DAC OUTPUT | | | | | | |
| Internal DAC Reference | V _{REFDAC} | (Note 10) | 0.85 × AV _{DD} | 0.9 × AV _{DD} | 0.95 × AV _{DD} | V |
| Output Load Regulation | | Code = 255; 0 to 100μA | 0.5 | | | LSB |
| | | Code = 0; 0 to 100μA | 0.5 | | | |
| Output Resistance | | Power-down mode | 1.0 | | | MΩ |
| TOUCH-SCREEN CONTROLLER | | | | | | |
| On-Resistance | | Y+, X+ | 7 | | | Ω |
| | | Y-, X- | 9 | | | |
| Touch-Detection Internal Pullup Resistance | | X+ to AV _{DD} | 1 | | | MΩ |
| KEYPAD CONTROLLER | | | | | | |
| Pullup Resistance | | C4, C3, C2, C1 (Note 11) | 0.5 | | | kΩ |
| Pulldown Resistance | | R4, R3, R2, R1 (Note 11) | 16 | | | kΩ |
| DIGITAL INTERFACE | | | | | | |
| DIGITAL INPUTS (SCLK, CS, DIN, R_, C_) | | | | | | |
| Input Voltage Low | V _{IL} | | 0.3 × DV _{DD} | | | V |
| Input Voltage High | V _{IH} | | 0.7 × DV _{DD} | | | V |
| Input Leakage Current | I _L | | ±0.1 | ±1 | μA | |

±15kV ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

ELECTRICAL CHARACTERISTICS (continued)

(DV_{DD} = AV_{DD} = +2.7V to +3.6V (MAX1233), DV_{DD} = AV_{DD} = +4.75V to +5.25V (MAX1234), external reference V_{REF} = 2.5V (MAX1233), V_{REF} = 4.096V (MAX1234); f_{SCLK} = 10MHz, f_{SAMPLE} = 50ksps, 12-bit mode, 0.1μF capacitor at REF, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at T_A = +25°C.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|---------------------------------------|---|------------------------|-----|------|-------|
| Input Capacitance | C _{IN} | | 15 | | | pF |
| DIGITAL OUTPUT (DOUT) | | | | | | |
| Output Voltage Low | V _{OL} | I _{SINK} = 2mA | 0.4 | | | V |
| | | I _{SINK} = 4mA | 0.8 | | | |
| Output Voltage High | V _{OH} | I _{SOURCE} = 1.5mA | DV _{DD} - 0.5 | | | V |
| DIGITAL OUTPUT (BUSY, PENIRQ, KEYIRQ, R ₋ , C ₋) | | | | | | |
| Output Voltage Low | V _{OL} | I _{SINK} = 0.2mA | 0.4 | | | V |
| Output Voltage High | V _{OH} | I _{SOURCE} = 0.2mA | DV _{DD} - 0.5 | | | V |
| POWER REQUIREMENTS | | | | | | |
| Supply Voltage (Note 12) | AV _{DD} / DV _{DD} | MAX1233 | 2.7 | 3 | 3.6 | V |
| | | MAX1234 | 4.75 | 5 | 5.25 | |
| Analog and Digital Supply Current | I _{AVDD} + I _{DVDD} | Idle; all blocks shut down | 0.5 | | | μA |
| | | Only ADC on; f _{SAMPLE} = 20ksps | 150 | | | |
| | | Only DAC on; no load | 150 | | | |
| | | Only internal reference on | 670 | | | |
| TIMING CHARACTERISTICS | | | | | | |
| SCLK Clock Period | t _{CP} | | 100 | | | ns |
| SCLK Pulse Width High | t _{CH} | | 40 | | | ns |
| SCLK Pulse Width Low | t _{CL} | | 40 | | | ns |
| DIN to SCLK Rise Setup | t _{DS} | | 40 | | | ns |
| SCLK Rise to DIN Hold | t _{DH} | | 0 | | | ns |
| SCLK Fall to DOUT Valid | t _{DOV} | C _{LOAD} = 50pF | 40 | | | ns |
| $\overline{\text{CS}}$ Fall to DOUT Enabled | t _{DV} | C _{LOAD} = 50pF | 45 | | | ns |
| $\overline{\text{CS}}$ Rise to DOUT Disabled | t _{DOD} | C _{LOAD} = 50pF | 40 | | | ns |
| $\overline{\text{CS}}$ Fall to SCLK Rise | t _{CSS} | | 40 | | | ns |
| $\overline{\text{CS}}$ Fall to SCLK Ignored | t _{CSH} | | 0 | | | ns |
| SCLK Rise to R ₋ /C ₋ Data Valid | t _{GPO} | C _{LOAD} = 50pF (Note 13) | 230 | | | ns |
| $\overline{\text{CS}}$ Pulse Width High | t _{CSW} | | 40 | | | ns |

Note 1: Tested at DV_{DD} = AV_{DD} = +2.7V (MAX1233), DV_{DD} = AV_{DD} = +5V (MAX1234).

Note 2: Relative accuracy is the deviation of the analog value at any code from its theoretical value after the offset and gain errors have been removed.

Note 3: Offset nulled.

Note 4: Difference between TEMP1 and TEMP2; temperature in °K = (V_{TEMP2} - V_{TEMP1}) × 2680°K/V. No calibration is necessary.

Note 5: Temperature coefficient is -2.1mV/°C. Determine absolute temperature by extrapolating from a calibrated value.

Note 6: ADC performance is limited by the conversion noise floor, typically 300μV_{P-P}. An external reference below 2.5V can compromise the ADC performance.

Note 7: Guaranteed from code 5 to 255.

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

ELECTRICAL CHARACTERISTICS (continued)

(DV_{DD} = AV_{DD} = +2.7V to +3.6V (MAX1233), DV_{DD} = AV_{DD} = +4.75V to +5.25V (MAX1234), external reference V_{REF} = 2.5V (MAX1233), V_{REF} = 4.096V (MAX1234); f_{SCLK} = 10MHz, f_{SAMPLE} = 50ksps, 12-bit mode, 0.1μF capacitor at REF, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at T_A = +25°C.)

Note 8: The offset value extrapolated from the range over which the INL is guaranteed.

Note 9: Output settling time is measured by stepping from code 5 to 255, and from code 255 to 5.


Note 10: Actual output voltage at full scale is $255/256 \times V_{REFDAC}$.

Note 11: Resistance is open when configured as GPIO or in shutdown.

Note 12: AV_{DD} and DV_{DD} should not differ by more than 300mV.

Note 13: When configured as GPIO.

Timing Diagram

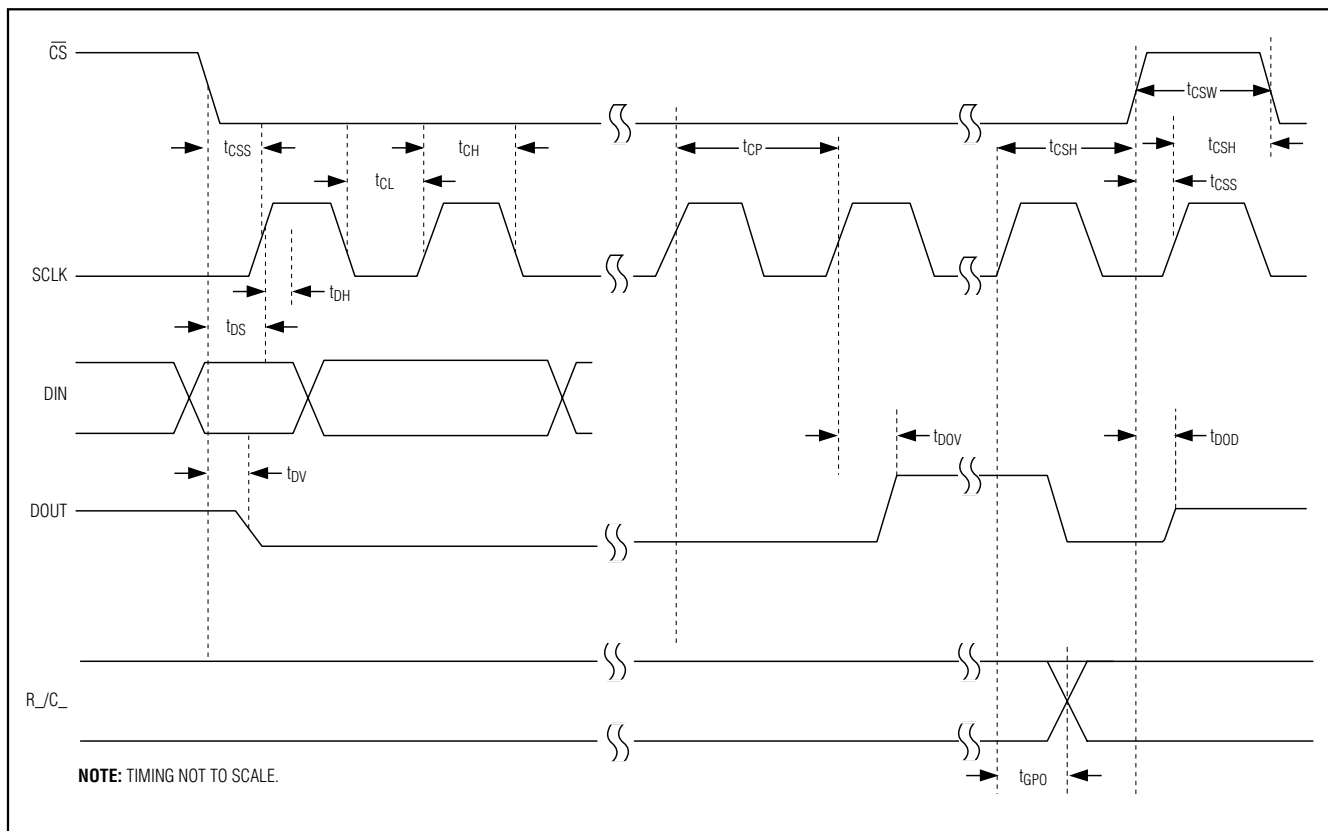


±15kV ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller


Typical Operating Characteristics

($AV_{DD} = DV_{DD} = 3V$ (MAX1233) or $5V$ (MAX1234), external $V_{REF} = +2.5V$ (MAX1233), external $V_{REF} = +4.096V$ (MAX1234), $f_{SCLK} = 10MHz$ (50% duty cycle), $f_{SAMPLE} = 20ksps$, $C_{LOAD} = 50pF$, $0.1\mu F$ capacitor at REF, $T_A = +25^\circ C$, unless otherwise noted.)


**SHUTDOWN CURRENT
vs. ANALOG SUPPLY VOLTAGE**

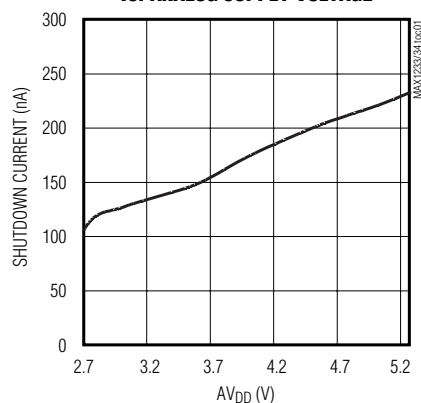


**SHUTDOWN CURRENT
vs. TEMPERATURE**

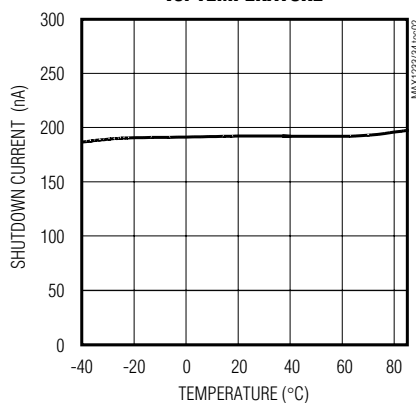


**INTERNAL OSCILLATOR FREQUENCY
vs. ANALOG SUPPLY VOLTAGE**

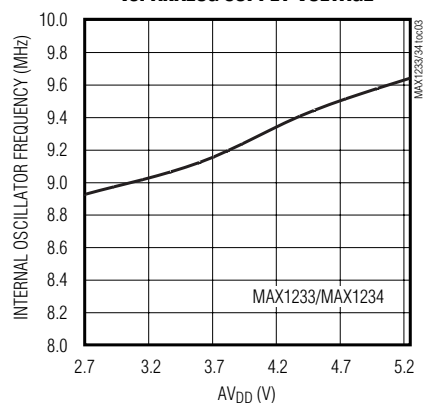


**INTERNAL OSCILLATOR FREQUENCY
vs. TEMPERATURE**

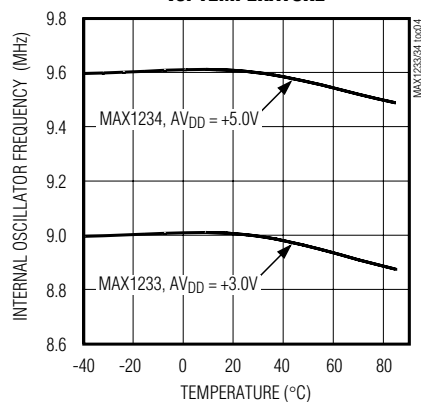


**TEMP1 DIODE VOLTAGE
vs. ANALOG SUPPLY VOLTAGE**

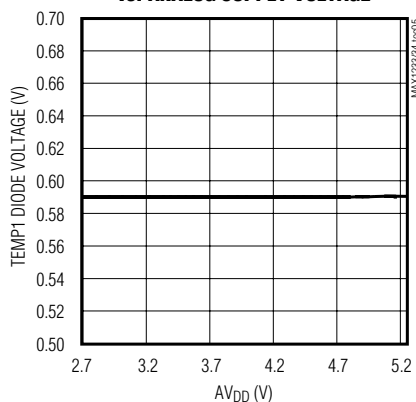


**TEMP1 DIODE VOLTAGE
vs. TEMPERATURE**

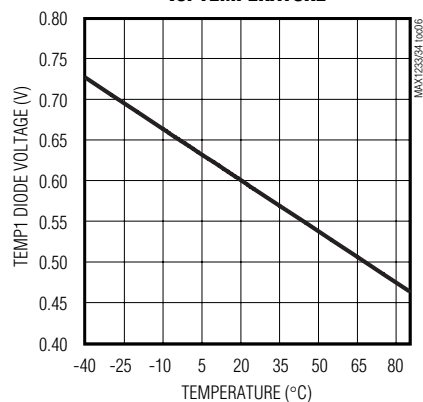

**TEMP2 DIODE VOLTAGE
vs. ANALOG SUPPLY VOLTAGE**

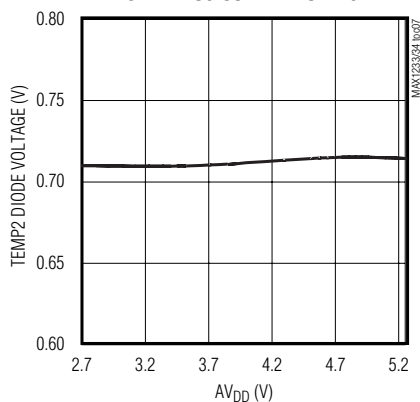

**TEMP2 DIODE VOLTAGE
vs. TEMPERATURE**

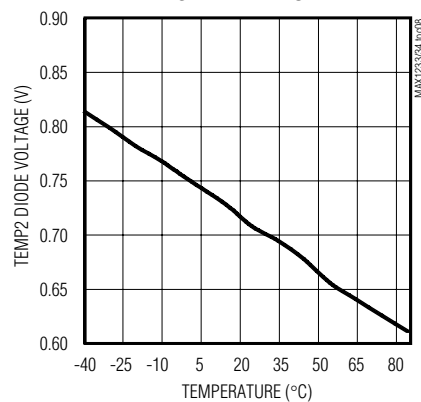


$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller


Typical Operating Characteristics (continued)

($AV_{DD} = DV_{DD} = 3\text{V}$ (MAX1233) or 5V (MAX1234), external $V_{REF} = +2.5\text{V}$ (MAX1233), external $V_{REF} = +4.096\text{V}$ (MAX1234), $f_{SCLK} = 10\text{MHz}$ (50% duty cycle), $f_{SAMPLE} = 20\text{kps}$, $C_{LOAD} = 50\text{pF}$, $0.1\mu\text{F}$ capacitor at REF, $T_A = +25^\circ\text{C}$, unless otherwise noted.)


**ADC INTEGRAL NONLINEARITY
vs. OUTPUT CODE**

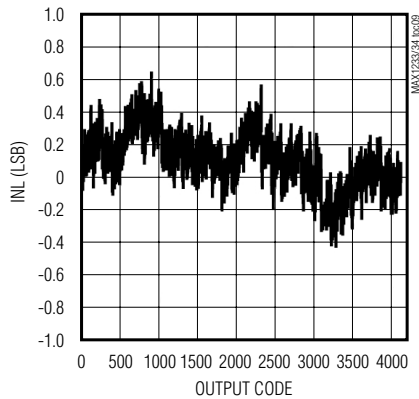


**ADC DIFFERENTIAL NONLINEARITY
vs. OUTPUT CODE**

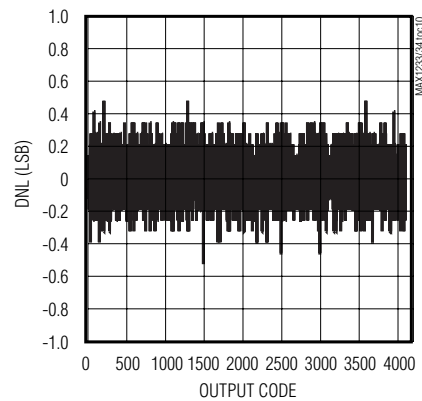


**ADC OFFSET ERROR
vs. ANALOG SUPPLY VOLTAGE**

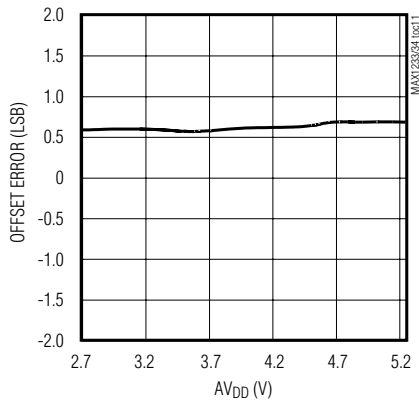


ADC OFFSET ERROR vs. TEMPERATURE

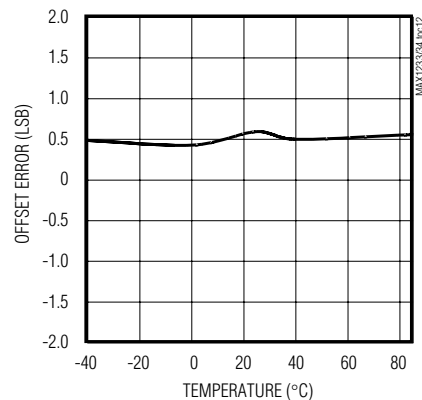

**ADC GAIN ERROR
vs. ANALOG SUPPLY VOLTAGE**

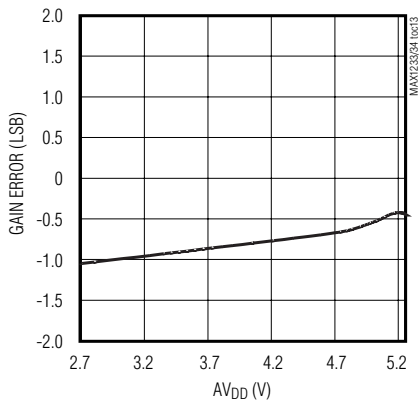







**ADC GAIN ERROR
vs. TEMPERATURE**

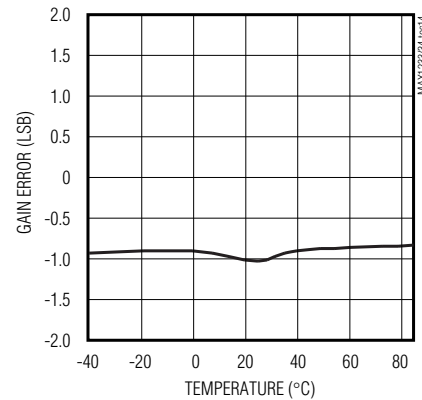

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

Typical Operating Characteristics (continued)







($A_{VDD} = D_{VDD} = 3\text{V}$ (MAX1233) or 5V (MAX1234), external $V_{REF} = +2.5\text{V}$ (MAX1233), external $V_{REF} = +4.096\text{V}$ (MAX1234), $f_{SCLK} = 10\text{MHz}$ (50% duty cycle), $f_{SAMPLE} = 20\text{kps}$, $C_{LOAD} = 50\text{pF}$, $0.1\mu\text{F}$ capacitor at REF, $T_A = +25^\circ\text{C}$, unless otherwise noted.)

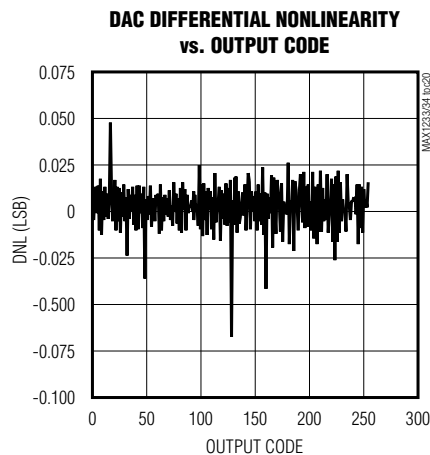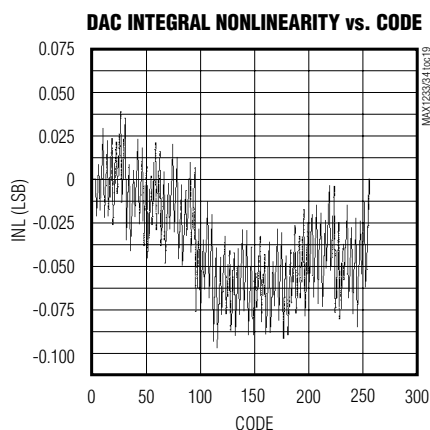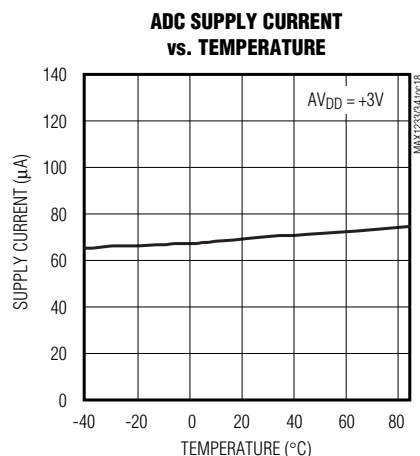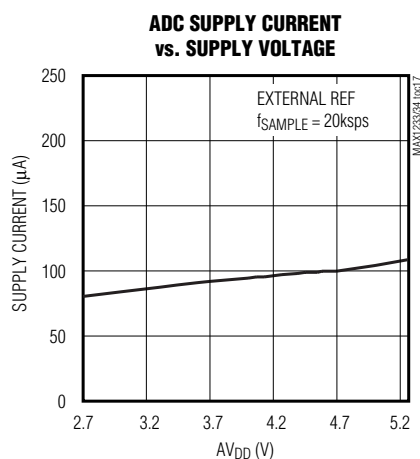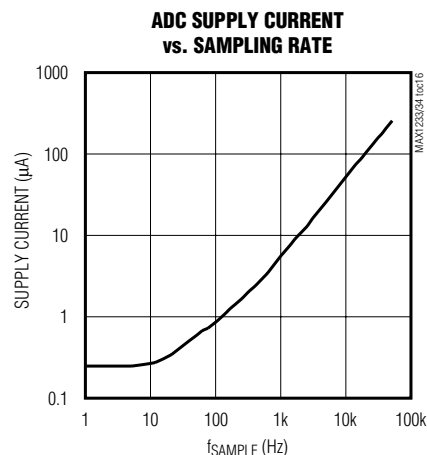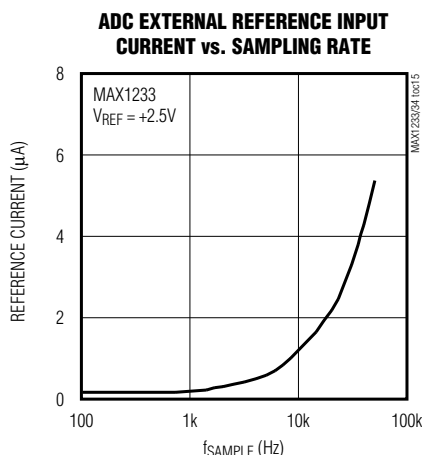

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

Typical Operating Characteristics (continued)



($AV_{DD} = DV_{DD} = 3\text{V}$ (MAX1233) or 5V (MAX1234), external $V_{REF} = +2.5\text{V}$ (MAX1233), external $V_{REF} = +4.096\text{V}$ (MAX1234), $f_{SCLK} = 10\text{MHz}$ (50% duty cycle), $f_{SAMPLE} = 20\text{ksps}$, $C_{LOAD} = 50\text{pF}$, $0.1\mu\text{F}$ capacitor at REF, $T_A = +25^\circ\text{C}$, unless otherwise noted.)

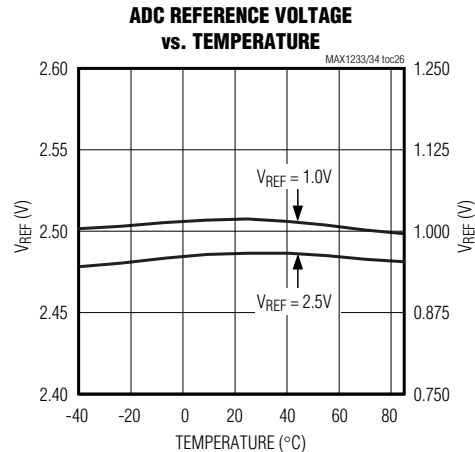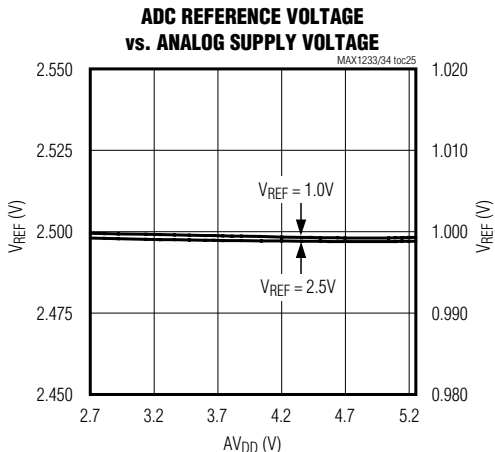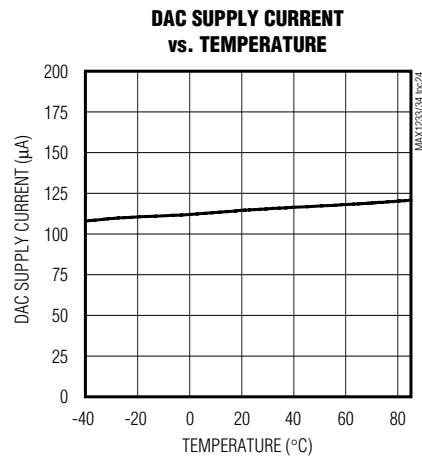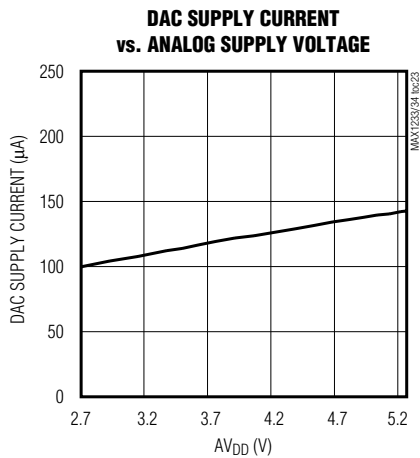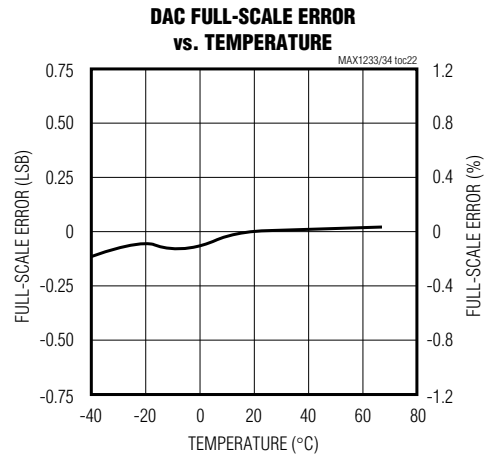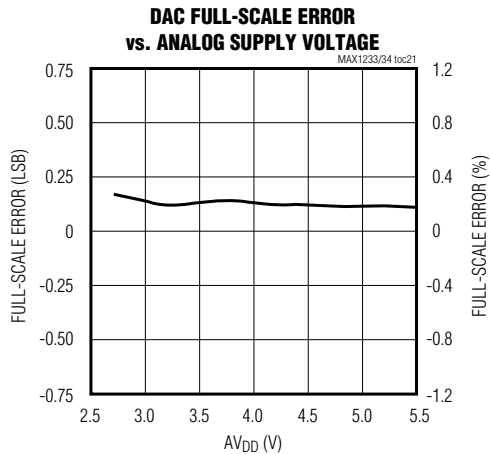

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

Typical Operating Characteristics (continued)

($\text{AV}_{\text{DD}} = \text{DV}_{\text{DD}} = 3\text{V}$ (MAX1233) or 5V (MAX1234), external $\text{V}_{\text{REF}} = +2.5\text{V}$ (MAX1233), external $\text{V}_{\text{REF}} = +4.096\text{V}$ (MAX1234), $\text{f}_{\text{SCLK}} = 10\text{MHz}$ (50% duty cycle), $\text{f}_{\text{SAMPLE}} = 20\text{ksps}$, $\text{C}_{\text{LOAD}} = 50\text{pF}$, $0.1\mu\text{F}$ capacitor at REF, $T_{\text{A}} = +25^{\circ}\text{C}$, unless otherwise noted.)

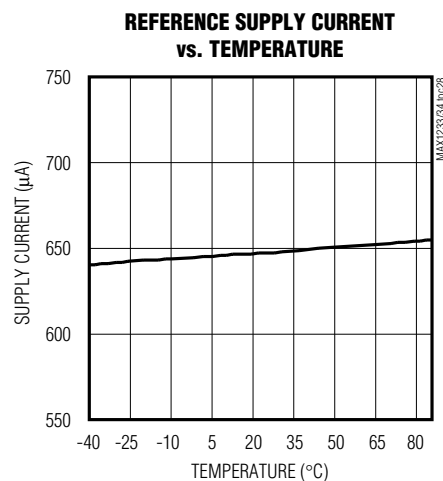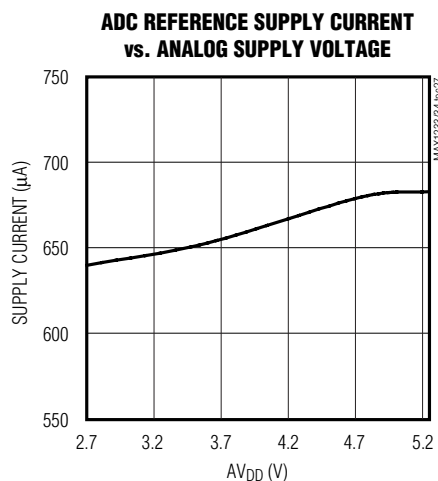

Pin Description

| PIN | NAME | FUNCTION |
|-----|------------------|--|
| 1 | DV _{DD} | Positive Digital Supply Voltage, +2.7V to +3.6V for MAX1233, +4.75V to +5.25V for MAX1234. Bypass with a 0.1 μF capacitor. Must be within 300mV of AV _{DD} . |
| 2 | AV _{DD} | Positive Analog Supply Voltage, +2.7V to +3.6V for MAX1233, +4.75V to +5.25V for MAX1234. Bypass with a 0.1 μF capacitor. Must be within 300mV of DV _{DD} . |
| 3* | X+ | X+ Position Input |
| 4* | Y+ | Y+ Position Input |
| 5* | X- | X- Position Input |
| 6* | Y- | Y- Position Input |
| 7 | GND | Analog and Digital Ground |
| 8* | BAT1 | Battery Monitoring Input 1. Measures battery voltages up to 6V. |
| 9* | BAT2 | Battery Monitoring Input 2. Measures battery voltages up to 6V. |
| 10* | AUX1 | Auxiliary Analog Input 1 to ADC. Measures analog voltages from zero to V _{REF} . |
| 11* | AUX2 | Auxiliary Analog Input 2 to ADC. Measures analog voltages from zero to V _{REF} . |
| 12 | REF | Voltage Reference Output/Input. Reference voltage for analog-to-digital conversion. In internal reference mode, the reference buffer provides a 2.5V or 1.0V nominal output. In external reference mode, apply a reference voltage between 1.0V and AV _{DD} . Bypass REF to GND with a 0.1 μF capacitor in the external reference mode only. |
| 13 | DACOUT | DAC Voltage Output; $0.9 \times \text{AV}_{\text{DD}}$ Full Scale |
| 14 | R4 | Keypad Row 4. Can be reconfigured as GPIO3. |
| 15 | R3 | Keypad Row 3. Can be reconfigured as GPIO2. |
| 16 | R2 | Keypad Row 2. Can be reconfigured as GPIO1. |
| 17 | R1 | Keypad Row 1. Can be reconfigured as GPIO0. |
| 18 | C1 | Keypad Column 1. Can be reconfigured as GPIO4. |

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

Pin Description (continued)

| PIN | NAME | FUNCTION |
|-----|----------------------------|---|
| 19 | C2 | Keypad Column 2. Can be reconfigured as GPIO5. |
| 20 | C3 | Keypad Column 3. Can be reconfigured as GPIO6. |
| 21 | C4 | Keypad Column 4. Can be reconfigured as GPIO7. |
| 22 | $\overline{\text{KEYIRQ}}$ | Active-Low Keypad Interrupt. $\overline{\text{KEYIRQ}}$ is low when a key press is detected. |
| 23 | $\overline{\text{PENIRQ}}$ | Active-Low Pen Touch Interrupt. $\overline{\text{PENIRQ}}$ is low when a screen touch is detected. |
| 24 | DOUT | Serial Data Output. Data is clocked out at SCLK falling edge. High impedance when $\overline{\text{CS}}$ is high. |
| 25 | $\overline{\text{BUSY}}$ | Active-Low Busy Output. $\overline{\text{BUSY}}$ goes low and stays low during each functional operation. The host controller should wait until $\overline{\text{BUSY}}$ is high again before using the serial interface. |
| 26 | DIN | Serial Data Input. Data is clocked in on the rising edge of SCLK. |
| 27 | SCLK | Serial Clock Input. Clocks data in and out of the serial interface and sets the conversion speed (duty cycle must be 30% to 70%). |
| 28 | $\overline{\text{CS}}$ | Active-Low Chip Select. Data is not clocked into DIN unless $\overline{\text{CS}}$ is low. When $\overline{\text{CS}}$ is high, DOUT is high impedance. |

*ESD protected: $\pm 8\text{kV}$ Contact, $\pm 15\text{kV}$ Air.

Detailed Description

The MAX1233/MAX1234 are 4-wire touch-screen controllers. Figure 1 shows the functional diagram of the MAX1233/MAX1234. Each device includes a 12-bit sampling ADC, 8-bit voltage output DAC, keypad scanner that can also be configured as a GPIO, internal clock, reference, temperature sensor, two battery monitor inputs, two auxiliary analog inputs, SPI/QSPI/MICROWIRE-compatible serial interface, and low on-resistance switches for driving touch screens.

The 16-bit register inside the MAX1233/MAX1234 allows for easy control and stores results that can be read at any time. The $\overline{\text{BUSY}}$ output indicates that a functional operation is in progress. The $\overline{\text{PENIRQ}}$ and $\overline{\text{KEYIRQ}}$ outputs, respectively, indicate that a screen touch or a key press has occurred.

Touch-Screen Operation

The 4-wire touch-screen controller works by creating a voltage gradient across the vertical or horizontal resistive touch screen connected to the analog inputs of the MAX1233/MAX1234, as shown in Figure 2. The voltage across the touch-screen panels is applied through internal MOSFET switches that connect each resistive layer to AV_{DD} and ground. For example, to measure the Y position when a pointing device presses on the touch screen, the Y+ and Y- drivers are turned on, connecting one side of the vertical resistive layer to AV_{DD} and the other side to ground. The horizontal resistive layer functions as a sense line. One side of this resistive layer gets connected to the X+ input, while the other side is left

open or floating. The point where the touch screen is pressed brings the two resistive layers in contact and creates a voltage-divider at that point. The data converter senses the voltage at the point of contact through the X+ input and digitizes it.

12-Bit ADC

Analog Inputs

Figure 3 shows a block diagram of the ADC's analog input section including the input multiplexer, the differential input, and the differential reference. The input multiplexer switches between X+, X-, Y+, Y-, AUX1, AUX2, BAT1, BAT2, and the internal temperature sensor.

The time required for the T/H to acquire an input signal is a function of how quickly its input capacitance is charged. If the input signal's source impedance is high, the acquisition time lengthens, and more time must be allowed. The acquisition time (t_{ACQ}) is the maximum time the device takes to acquire the input signal to 12-bit accuracy. Configure t_{ACQ} by writing to the ADC control register. See Table 1 for the maximum input signal source impedance (R_{SOURCE}) for complete settling during acquisition.

Accommodate higher source impedances by placing a $0.1\mu\text{F}$ capacitor between the analog input and GND.

Input Bandwidth

The ADC's input-tracking circuitry has a 0.5MHz small-signal bandwidth. To avoid high-frequency signals being aliased into the frequency band of interest, anti-alias filtering is recommended.

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

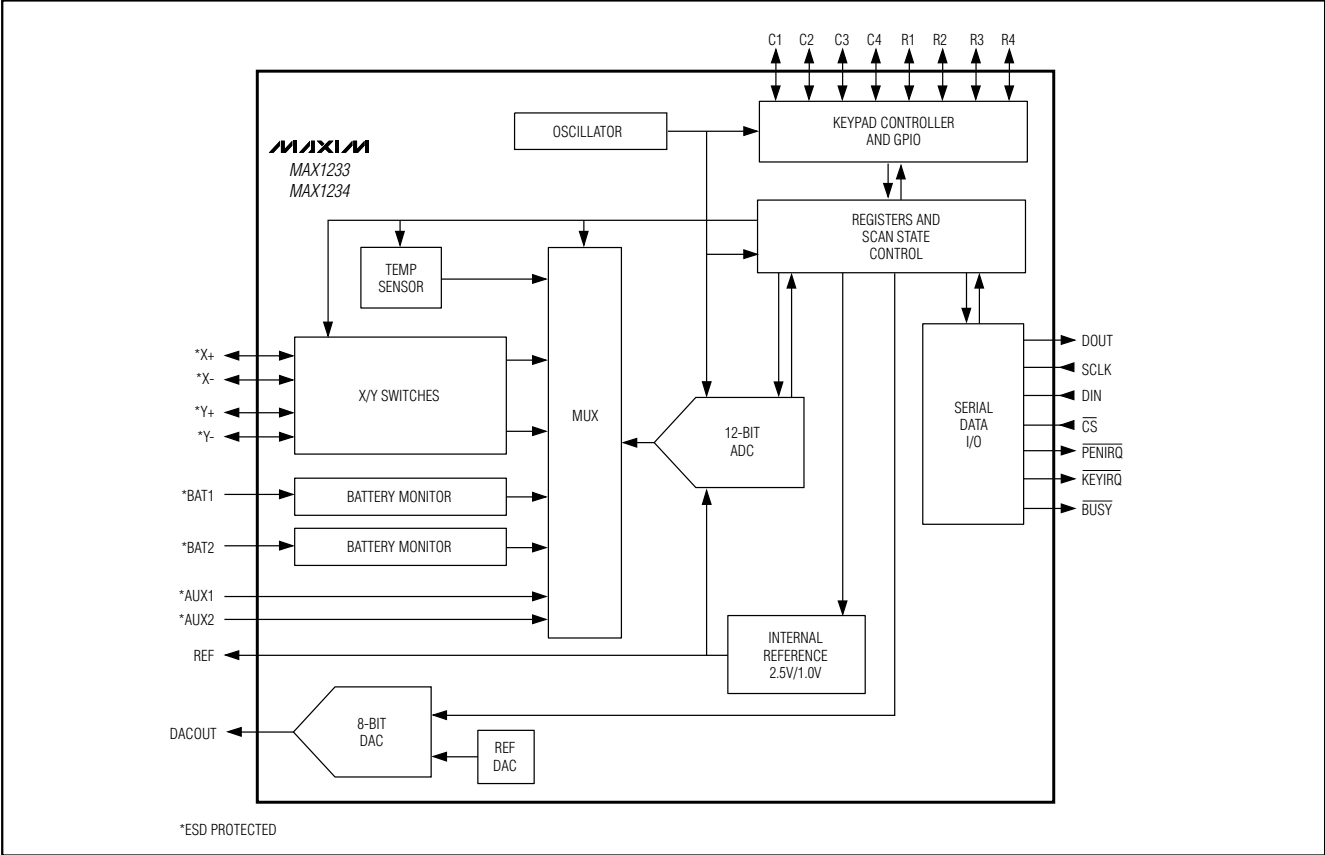


Figure 1. Block Diagram

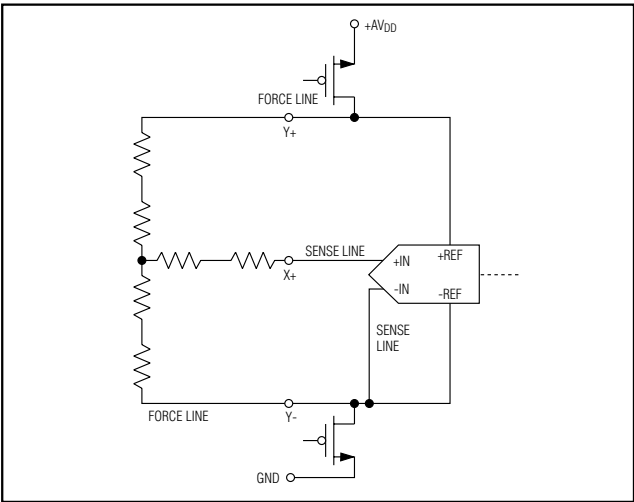


Figure 2. Touch-Screen Measurement

Table 1. Maximum Input Source Impedance

| ACQUISITION TIME (μs) | RESOLUTION (BITS) | MAXIMUM R _{SOURCE} FOR COMPLETE SETTLING DURING ACQUISITION ($\text{k}\Omega$) |
|------------------------------------|-------------------|---|
| 1.5 | 8 | 2.6 |
| 1.5 | 10 | 2.0 |
| 1.5 | 12 | 1.5 |
| 5.0 | 8 | 23 |
| 5.0 | 10 | 19 |
| 5.0 | 12 | 15 |
| 95 | 8 | 560 |
| 95 | 10 | 470 |
| 95 | 12 | 400 |

±15kV ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

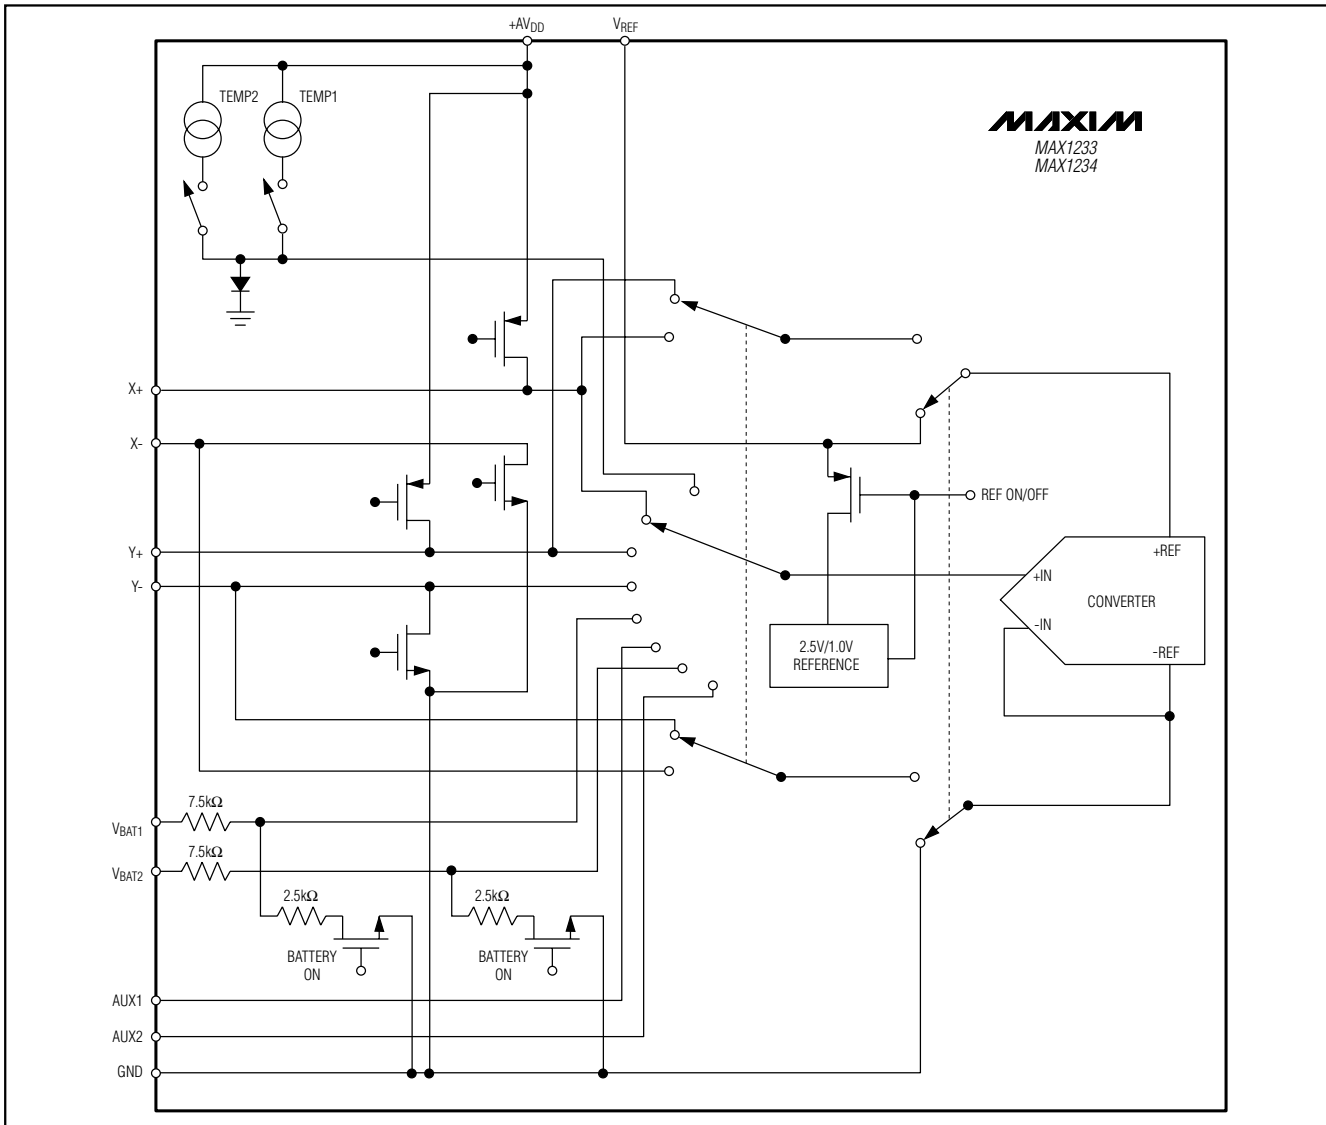


Figure 3. Simplified Diagram of Analog Input Section

Analog Input Protection

Internal protection diodes that clamp the analog input to AV_{DD} and GND allow the analog input pins to swing from GND - 0.3V to AV_{DD} + 0.3V without damage. Analog inputs must not exceed AV_{DD} by more than 50mV or be lower than GND by more than 50mV for accurate conversions. If an off-channel analog input voltage exceeds the supplies, limit the input current to 50mA. **All analog inputs are also fully ESD protected**

to ±8kV, using the Contact-Discharge method and ±15kV using the Air-Gap method specified in IEC-1000-4-2.

Reference for ADC

Internal Reference

The MAX1233/MAX1234 offer an internal voltage reference for the ADC that can be set to +1.0V or +2.5V. The MAX1233/MAX1234 typically use the internal reference for battery monitoring, temperature measurement, and for

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

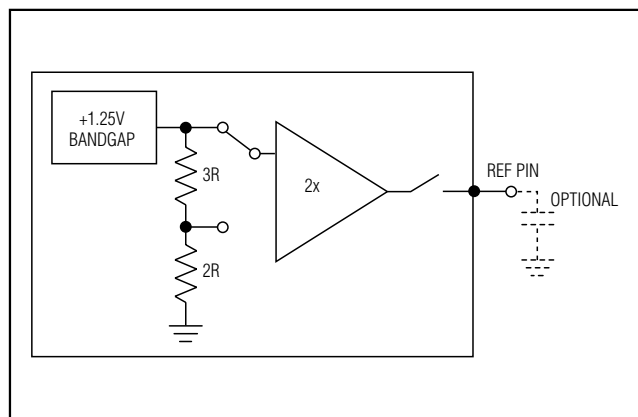


Figure 4. Block Diagram of the Internal Reference

measurement of the auxiliary inputs. Figure 4 shows the on-chip reference circuitry of the MAX1233/MAX1234.

Set the internal reference voltage by writing to the RFV bits in the ADC control register (see Tables 4, 5, and 12). The MAX1233/MAX1234 can accept an external reference connected to REF for ADC conversion.

External Reference

The MAX1233/MAX1234 can accept an external reference connected to the REF pin for ADC conversions. The internal reference should be disabled ($\text{RES1} = 1$) when using an external reference. At a conversion rate of 50ksps, an external reference at REF must deliver up to $15\mu\text{A}$ of load current and have 50Ω or less output impedance. If the external reference has high output impedance or is noisy, bypass it close to the REF pin with a $0.1\mu\text{F}$ capacitor.

Selecting Internal or External Reference

Set the type of reference being used by programming the ADC control register. To select the internal reference, clock zeros into bits [A/D3:A/D0] and a zero to bit RES1, as shown in the *Control Registers* section. To change to external reference mode, clock zeros into bits [A/D3:A/D0] and a one to bit RES1. See Table 13 for more information about selecting an internal or external reference for the ADC.

Reference Power Modes

Auto Power-Down Mode ($\text{RES1} = \text{RES0} = 0$)

The MAX1233/MAX1234 are in auto power-down mode at initial power-up. Set the RES1 and RES0 bits to zero to use the MAX1233/MAX1234 in the auto power-down mode. In this mode, the internal reference is normally off. When a command to perform a battery measure-

ment, temperature measurement, or auxiliary input measurement is written to the ADC control register, the device powers on the internal reference, waits for the internal reference to settle, completes the requested scan, and powers down the internal reference. The reference power delay depends upon the ADC resolution selected (see Table 8). Do not bypass REF with an external capacitor when performing scans in auto power-down mode.

Full-Power Mode ($\text{RES1} = 0$, $\text{RES0} = 1$)

In the full-power mode, the RES1 bit is set LOW and RES0 bit is set HIGH. In this mode, the device is powered up and the internal ADC reference is always ON. The MAX1233/MAX1234 internal reference remains fully powered after completing a scan.

Internal Clock

The MAX1233/MAX1234 operate from an internal oscillator, which is accurate to within 20% of the 10MHz specified clock rate. The internal oscillator controls the timing of the acquisition, conversion, touch-screen settling, reference power-up, and keypad debounce times.

8-Bit DAC

The MAX1233/MAX1234 have a voltage-output, true 8-bit monotonic DAC with less than 1LSB integral nonlinearity error and less than 1LSB differential nonlinearity error. It requires a supply current of only $150\mu\text{A}$ (typ) and provides a buffered voltage output. The DAC is at midscale code at power-up and remains there until a new code is written to the DAC register. During shutdown, the DAC's output is pulled to ground with a $1\text{M}\Omega$ load.

The internal DAC can be used in various system applications such as LCD/TFT-bias control, automatic tuning (VCO), power amplifier bias control, programmable threshold levels, and automatic gain control (AGC).

The 8-bit DAC in the MAX1233/MAX1234 employs a current-steering topology as shown in Figure 5. At the core of this DAC is a reference voltage-to-current converter (V/I) that generates a reference current. This current is mirrored to 255 equally weighted current sources. DAC switches control the outputs of these current mirrors so that only the desired fraction of the total current-mirror currents is steered to the DAC output. The current is then converted to a voltage across a resistor, and the output amplifier buffers this voltage.

DAC Output Voltage

The 8-bit DAC code is binary unipolar with $1\text{LSB} = (\text{VREF}/256)$. The DAC has a full-scale output voltage of $(0.9 \times \text{AVDD} - 1\text{LSB})$.

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

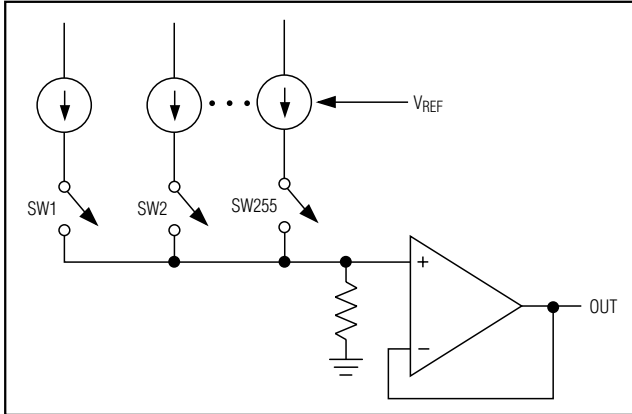


Figure 5. DAC Current-Steering Topology

Output Buffer

The DAC voltage output is an internally buffered unity-gain follower that slews at up to $\pm 0.4\text{V}/\mu\text{s}$. The output can swing from zero to full scale. With a 1/4FS to 3/4FS output transition, the amplifier output typically settles to 1/2LSB in less than $5\mu\text{s}$ when loaded with $10\text{k}\Omega$ in parallel with 50pF . The buffer amplifier is stable with any combination of resistive loads $>10\text{k}\Omega$ and capacitive loads $<50\text{pF}$.

Power-On Reset

All registers of the MAX1233/MAX1234 power up at a default zero state, except the DAC data register, which is set to 10000000, so the output is at midscale.

Keypad Controller and GPIO

The keypad controller is designed to interface a matrix-type 4 rows \times 4 columns (16 keys or fewer) keypad to a host controller. The KEY control register controls keypad interrupt, keypad scan, and keypad debounce times. The KeyMask and ColumnMask registers enable masking of a particular key or an entire column of the keypad when they are not in use. The MAX1233/MAX1234 offer two keypad data registers. KPData1 holds all keypad scan results, including masked data, and is thus the pending register. KPData2 holds keypad scan results of only the unmasked keys. If 12 or fewer keys are being monitored, one or more of the row/column pins of the MAX1233/MAX1234 can be software programmed as GPIO pins.

Touch-Screen Detection

Touch-screen detection can be enabled or disabled by writing to the ADC control register as shown in Table 4. Touch-screen detection is disabled at initial power-up. Once touch-screen detection is enabled, the Y- driver is on and the Y- pin is connected to GND. The X+ pin is

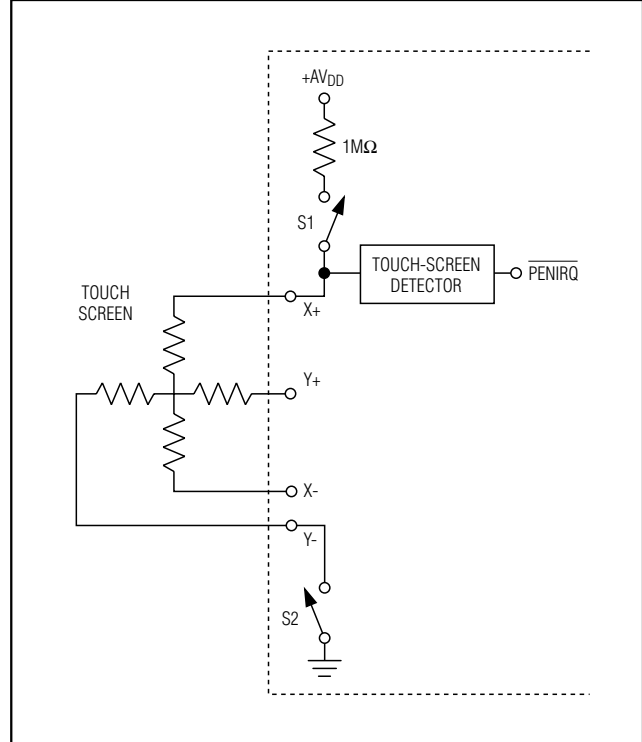


Figure 6. Touch-Screen Detection Block Diagram

internally pulled to AV_{DD} through a $1\text{M}\Omega$ resistor as shown in Figure 6. When the screen is touched, the X+ pin is pulled to GND through the touch screen and a touch is detected.

When the $1\text{M}\Omega$ pullup resistor is first connected, the X+ pin can be floating near ground. To prevent false touch detection in this case, the X+ pin is precharged high for $0.1\mu\text{s}$ using the 7Ω PMOS driver before touch detection begins.

Key-Press Detection

Key-press detection can be enabled or disabled by writing to the keypad control register as shown in Table 17. Key-press detection is disabled at initial power-up. Once key-press detection is enabled, the C_ pins are internally connected to DV_{DD} and the R_ pins are internally pulled to GND through a $16\text{k}\Omega$ resistor. When a key is pressed, the associated row pin is pulled to DV_{DD} and the key press is detected. Figure 7 shows the key-press detection circuitry.

Interrupts

PEN Interrupt Request (PENIRQ)

The $\overline{\text{PENIRQ}}$ output can be used to alert the host controller of a screen touch. The $\overline{\text{PENIRQ}}$ output is normally

±15kV ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

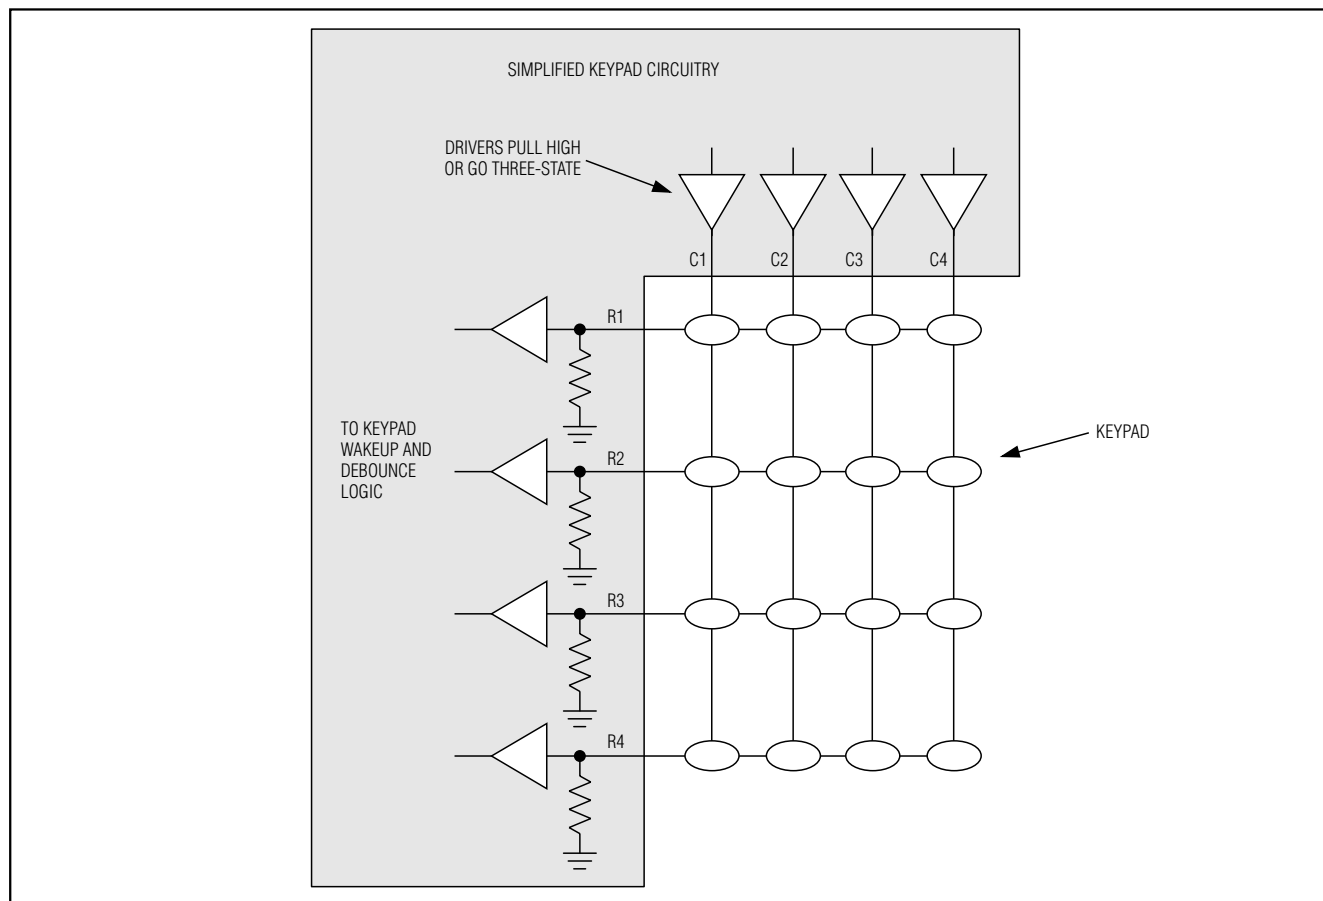


Figure 7. Key-Press Detection Circuitry

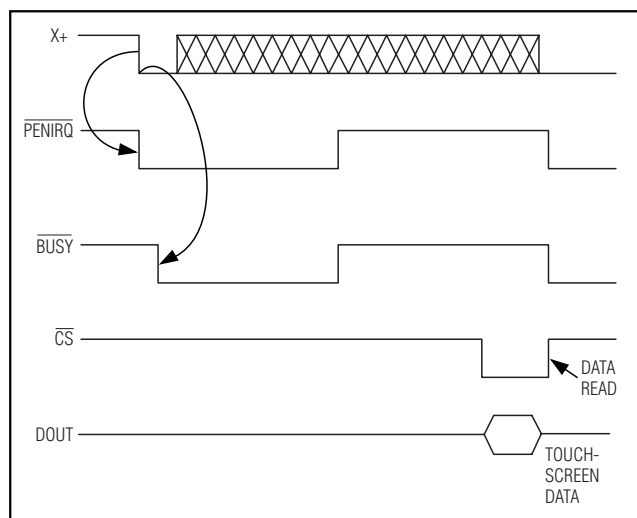


Figure 8a. Timing Diagram for Touch-Initiated Screen Scan

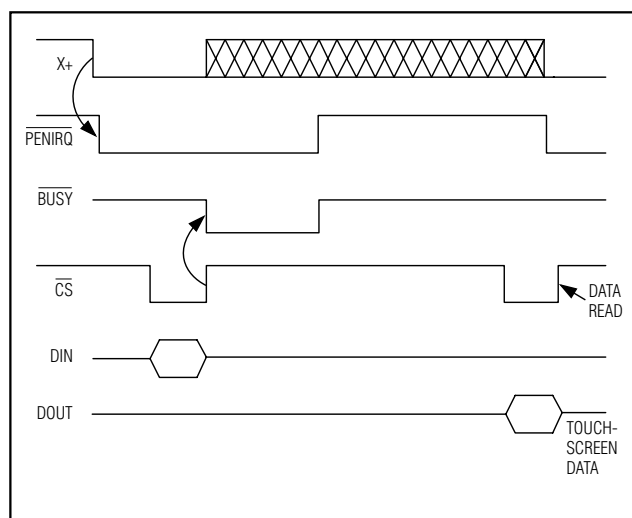


Figure 8b. Timing Diagram for Host-Initiated Screen Scan

±15kV ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

high and goes low after a screen touch is detected. $\overline{\text{PENIRQ}}$ returns high only after a touch-screen scan is completed. $\overline{\text{PENIRQ}}$ does not go low again until one of the touch-screen data registers is read. Figures 8a and 8b show the timing diagrams for the $\overline{\text{PENIRQ}}$ pin.

Keypad Interrupt Request ($\overline{\text{KEYIRQ}}$)

The $\overline{\text{KEYIRQ}}$ output can be used to alert the host controller of a key press. The $\overline{\text{KEYIRQ}}$ output is normally high and goes low after a key press is detected. $\overline{\text{KEYIRQ}}$ returns high only after a key-press scan is completed. $\overline{\text{KEYIRQ}}$ does not go low again until one of the key-press data registers is read. Figures 9a and 9b show the timing diagrams for the $\overline{\text{KEYIRQ}}$ pin.

Busy Indicator ($\overline{\text{BUSY}}$)

$\overline{\text{BUSY}}$ informs the host processor that a scan is in progress. $\overline{\text{BUSY}}$ is normally high and goes low and stays low during each functional operation. The host controller should wait until $\overline{\text{BUSY}}$ is high again before using the serial interface.

Digital Interface

The MAX1233/MAX1234 interface to the host controller through a standard 3-wire serial interface at up to 10MHz. DIN and $\overline{\text{CS}}$ are the digital inputs to the MAX1233/MAX1234. DOUT is the serial data output. Data is clocked out at the SCLK falling edge and is high impedance when $\overline{\text{CS}}$ is high. $\overline{\text{PENIRQ}}$ and $\overline{\text{KEYIRQ}}$ communicate interrupts from the touch-screen and keypad controllers to the host processor when a screen touch or a key press is detected. $\overline{\text{BUSY}}$ informs the host processor that a scan is in progress. In addition to these digital I/Os, the row and column pins of the keypad controller can be programmed as GPIO pins.

Communications Protocol

The MAX1233/MAX1234 are controlled by reading from and writing to registers through the 3-wire serial interface. These registers are addressed through a 16-bit command that is sent prior to the data. The command is shown in Table 2.

The first 16 bits after the falling edge of $\overline{\text{CS}}$ contain the command word. The command word begins with an R/ $\overline{\text{W}}$ bit, which specifies the direction of data flow on the serial bus. Bits 14 through 7 are reserved for future use. Bit 6 specifies the page of memory in which the desired register is located. The last 6 bits specify the

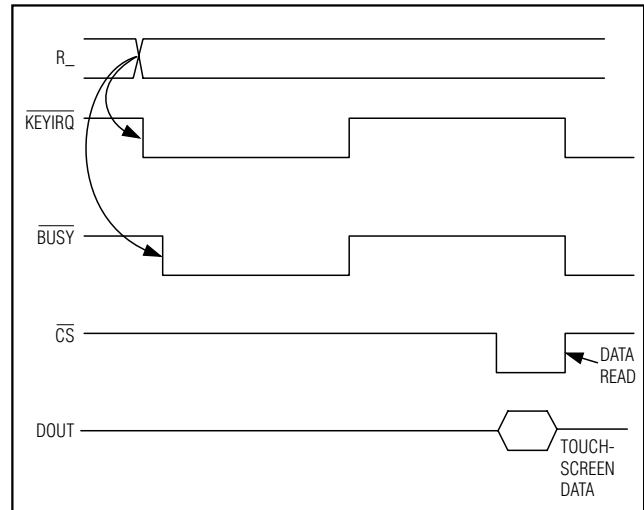


Figure 9a. Timing Diagram for Key-Press-Initiated Debounce Scan

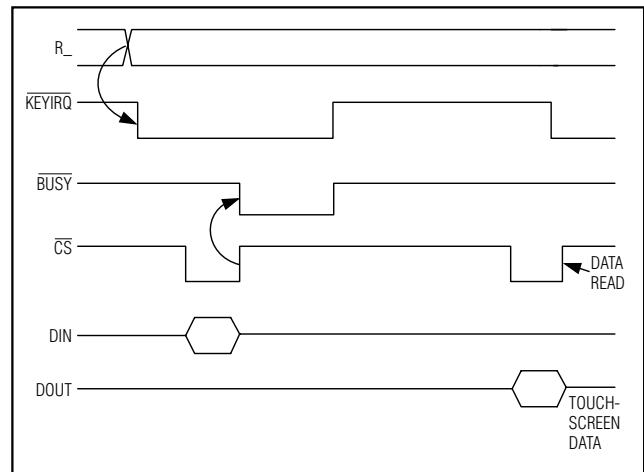


Figure 9b. Timing Diagram for Host-Initiated Keypad Debounce Scan

address of the desired register. The next 16 bits of data are read from or written to the address specified in the command word. After 32 clock cycles, the interface automatically increments its address pointer and continues reading or writing until the rising edge of $\overline{\text{CS}}$, or until it reaches the end of the page.

Table 2. Command Word Format

| BIT15 MSB | BIT14 | BIT13 | BIT12 | BIT11 | BIT10 | BIT9 | BIT8 | BIT7 | BIT6 | BIT5 | BIT4 | BIT3 | BIT2 | BIT1 | BIT0 LSB |
|--------------------------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|-------------|
| R/ $\overline{\text{W}}$ | RES | RES | RES | RES | RES | RES | RES | RES | PAGE | ADD5 | ADD4 | ADD3 | ADD2 | ADD1 | ADD0 |

±15kV ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

Table 3. Register Summary for MAX1233/MAX1234

| PAGE | ADDR (HEX) | REGISTER NAME | BIT15 | BIT14 | BIT13 | BIT12 | BIT11 | BIT10 | BIT9 | BIT8 | BIT7 | BIT6 | BIT5 | BIT4 | BIT3 | BIT2 | BIT1 | BIT0 |
|------|------------|---------------|---------|---------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| 0 | 00 | X | 0 | 0 | 0 | 0 | X11 | X10 | X9 | X8 | X7 | X6 | X5 | X4 | X3 | X2 | X1 | X0 |
| 0 | 01 | Y | 0 | 0 | 0 | 0 | Y11 | Y10 | Y9 | Y8 | Y7 | Y6 | Y5 | Y4 | Y3 | Y2 | Y1 | Y0 |
| 0 | 02 | Z1 | 0 | 0 | 0 | 0 | Z1_11 | Z1_10 | Z1_9 | Z1_8 | Z1_7 | Z1_6 | Z1_5 | Z1_4 | Z1_3 | Z1_2 | Z1_1 | Z1_0 |
| 0 | 03 | Z2 | 0 | 0 | 0 | 0 | Z2_11 | Z2_10 | Z2_9 | Z2_8 | Z2_7 | Z2_6 | Z2_5 | Z2_4 | Z2_3 | Z2_2 | Z2_1 | Z2_0 |
| 0 | 04 | KPD | K15 | K14 | K13 | K12 | K11 | K10 | K9 | K8 | K7 | K6 | K5 | K4 | K3 | K2 | K1 | K0 |
| 0 | 05 | BAT1 | 0 | 0 | 0 | 0 | B1_11 | B1_10 | B1_9 | B1_8 | B1_7 | B1_6 | B1_5 | B1_4 | B1_3 | B1_2 | B1_1 | B1_0 |
| 0 | 06 | BAT2 | 0 | 0 | 0 | 0 | B2_11 | B2_10 | B2_9 | B2_8 | B2_7 | B2_6 | B2_5 | B2_4 | B2_3 | B2_2 | B2_1 | B2_0 |
| 0 | 07 | AUX1 | 0 | 0 | 0 | 0 | A1_11 | A1_10 | A1_9 | A1_8 | A1_7 | A1_6 | A1_5 | A1_4 | A1_3 | A1_2 | A1_1 | A1_0 |
| 0 | 08 | AUX2 | 0 | 0 | 0 | 0 | A2_11 | A2_10 | A2_9 | A2_8 | A2_7 | A2_6 | A2_5 | A2_4 | A2_3 | A2_2 | A2_1 | A2_0 |
| 0 | 09 | TEMP1 | 0 | 0 | 0 | 0 | T1_11 | T1_10 | T1_9 | T1_8 | T1_7 | T1_6 | T1_5 | T1_4 | T1_3 | T1_2 | T1_1 | T1_0 |
| 0 | 0A | TEMP2 | 0 | 0 | 0 | 0 | T2_11 | T2_10 | T2_9 | T2_8 | T2_7 | T2_6 | T2_5 | T2_4 | T2_3 | T2_2 | T2_1 | T2_0 |
| 0 | 0B | DAC | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | DA7 | DA6 | DA5 | DA4 | DA3 | DA2 | DA1 | DA0 |
| 0 | 0C | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 0D | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 0E | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 0F | GPIO | GPD7 | GPD6 | GPD5 | GPD4 | GPD3 | GPD2 | GPD1 | GPD0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 10 | KPData1 | K1_15 | K1_14 | K1_13 | K1_12 | K1_11 | K1_10 | K1_9 | K1_8 | K1_7 | K1_6 | K1_5 | K1_4 | K1_3 | K1_2 | K1_1 | K1_0 |
| 0 | 11 | KPData2 | K2_15 | K2_14 | K2_13 | K2_12 | K2_11 | K2_10 | K2_9 | K2_8 | K2_7 | K2_6 | K2_5 | K2_4 | K2_3 | K2_2 | K2_1 | K2_0 |
| 0 | 12 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 13 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 14 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 15 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 16 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 17 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 18 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 19 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 1A | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 1B | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 1C | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 1D | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 1E | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 1F | Reserved | RES | RES | RES | RES | RES | RES | RES | RES | RES | RES | RES | RES | RES | RES | RES | RES |
| 1 | 00 | ADC | PENSTS | ADSTS | A/D3 | A/D2 | A/D1 | A/D0 | RES1 | RES0 | AVG1 | AVG2 | CNR1 | CNR0 | ST2 | ST1 | ST0 | RFV |
| 1 | 01 | KEY | KEYSTS1 | KEYSTS0 | DBN2 | DBN1 | DBN0 | HLD2 | HLD1 | HLD0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 02 | DAC | DAPD | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 03 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 04 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 05 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 06 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 07 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 08 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 09 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 0A | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 0B | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 0C | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 0D | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 0E | GPIO Pullup | PU7 | PU6 | PU5 | PU4 | PU3 | PU2 | PU1 | PU0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 0F | GPIO | GP7 | GP6 | GP5 | GP4 | GP3 | GP2 | GP1 | GP0 | OE7 | OE6 | OE5 | OE4 | OE3 | OE2 | OE1 | OE0 |
| 1 | 10 | KPKeyMask | KM15 | KM14 | KM13 | KM12 | KM11 | KM10 | KM9 | KM8 | KM7 | KM6 | KM5 | KM4 | KM3 | KM2 | KM1 | KM0 |
| 1 | 11 | KPColumn Mask | CM4 | CM3 | CM2 | CM1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 12 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 13 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 14 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 15 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 16 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 17 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 18 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 19 | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 1A | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 1B | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 1C | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 1D | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 1E | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 1F | Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

±15kV ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

In order to read the entire first page of memory, for example, the host processor must send the MAX1233/MAX1234 the command 0x8000H. The MAX1233/MAX1234 then begin clocking out 16-bit data starting with the X-data register. In order to write to the second page of memory, the host processor sends the MAX1233/MAX1234 the command 0x0040H. The succeeding data is then written in 16-bit words beginning with the ADC control register. Figures 10a and 10b show a complete write and read operation, respectively, between the processor and the MAX1233/MAX1234.

Memory Map

The MAX1233/MAX1234s' internal memory is divided into two pages—one for data and one for control, each of which contains thirty-two 16-bit registers.

Control Registers

Table 3 provides a summary of all registers and bit locations of the MAX1233/MAX1234.

ADC Control Register

The ADC measures touch position, touch pressure, battery voltage, auxiliary analog inputs, and temperature. The ADC control register determines which input is selected and converted. Tables 4 and 5 show the format and bit descriptions for the ADC control register.

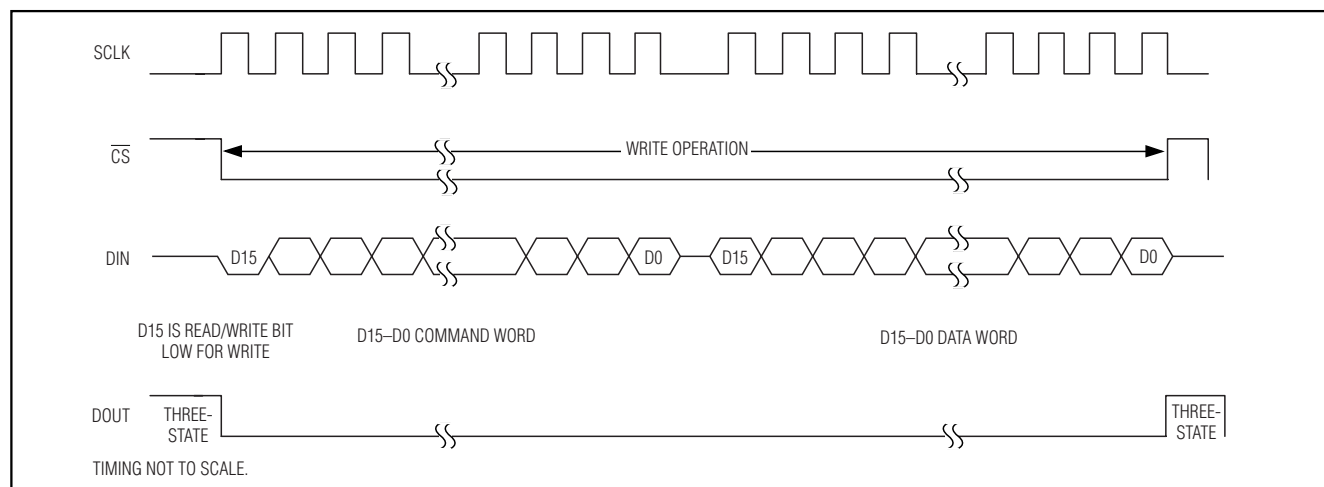


Figure 10a. Timing Diagram of Write Operation

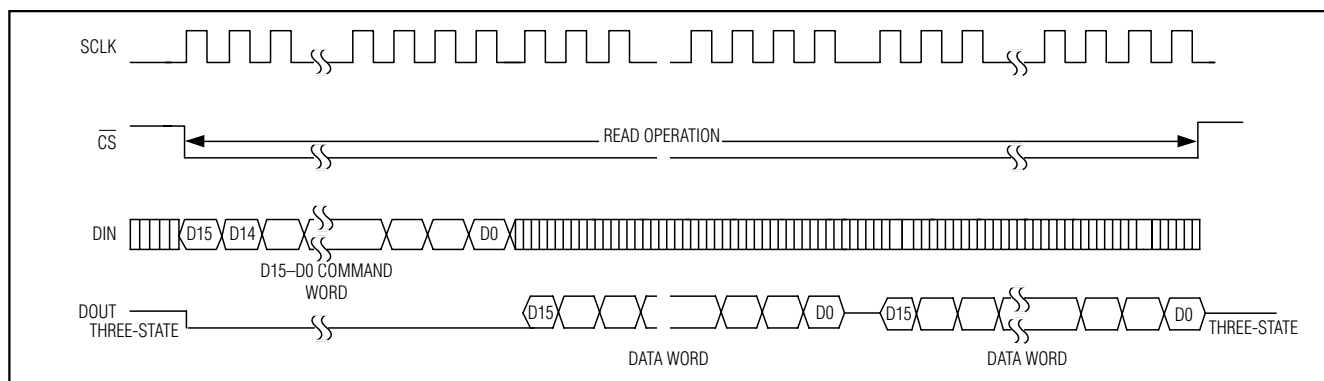


Figure 10b. Timing Diagram of Read Operation

Table 4. ADC Control Register

| BIT15 | BIT14 | BIT13 | BIT12 | BIT11 | BIT10 | BIT9 | BIT8 | BIT7 | BIT6 | BIT5 | BIT4 | BIT3 | BIT2 | BIT1 | BIT0 |
|--------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| PENSTS | ADSTS | A/D3 | A/D2 | A/D1 | A/D0 | RES1 | RES0 | AVG1 | AVG0 | CNR1 | CNR0 | ST2 | ST1 | ST0 | RFV |

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

Bits 14-15: Pen Interrupt Status and ADC Status Bits

These bits are used to control or monitor ADC scans.

Bits 10-13: ADC Scan Select

These bits control which input to convert and which converter mode is used. The bits are identical regardless of a read or write. See Table 7 for details about using these bits.

Bits 8-9: ADC Resolution Control

These bits specify the ADC resolution and are identical regardless of read or write. Table 8 shows how to use these bits to set the resolution.

Bits 6-7: Converter Averaging Control

These bits specify the number of data averages the converter performs. Table 9 shows how to program for the desired number of averages. When averaging is used, ADSTS and BUSY indicate the converter is busy until all conversions needed for the averaging finish. These bits are identical, regardless of read or write.

Bits 4-5: ADC Conversion Rate Control

These bits specify the internal conversion rate, which the ADC uses to perform a single conversion, as shown in Table 10. Lowering the conversion rate also reduces power consumption. These bits are identical, regardless of read or write.

Table 5. ADC Control Register Bit Descriptions

| BIT | NAME | DESCRIPTION |
|----------|--------|--|
| 15 (MSB) | PENSTS | Read: pen interrupt status; Write: sets interrupt initiated touch-screen scans |
| 14 | ADSTS | Read: ADC status; Write: stops ADC |
| 13 | A/D3 | Selects ADC scan functions |
| 12 | A/D2 | Selects ADC scan functions |
| 11 | A/D1 | Selects ADC scan functions |
| 10 | A/D0 | Selects ADC scan functions |
| 9 | RES1 | Controls ADC resolution |
| 8 | RES0 | Controls ADC resolution |
| 7 | AVG1 | Controls ADC result averaging |
| 6 | AVG0 | Controls ADC result averaging |
| 5 | CNR1 | Controls ADC conversion rate |
| 4 | CNR0 | Controls ADC conversion rate |
| 3 | ST2 | Controls touch-screen settling wait time |
| 2 | ST1 | Controls touch-screen settling wait time |
| 1 | ST0 | Controls touch-screen settling wait time |
| 0 (LSB) | RFV | Chooses 1.0V or 2.5V reference |

Table 6. ADSTS Bit Operation

| PENSTS | ADSTS | READ FUNCTION | WRITE FUNCTION |
|--------|-------|--|---|
| 0 | 0 | No screen touch detected; scan or conversion in progress | Performs one scan and waits to detect a screen touch. Upon detection, issues an interrupt and waits until told to scan by the host controller. |
| 1 | 0 | Screen touch detected; scan or conversion in progress | Stops any ongoing scan and waits to detect a screen touch. Upon detection, issues an interrupt and performs a scan. |
| 0 | 1 | No screen touch detected; data available | Stops any ongoing scan and waits to detect a screen touch. Upon detection, issues an interrupt and waits until told to scan by the host controller. |
| 1 | 1 | Screen touch detected; data available | Stops any ongoing scan and powers down the screen touch detection circuit. No screen touches are detected in this mode. |

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

Table 7. ADC Scan Select (Touch Screen, Battery, Auxiliary Channels, and Temperature)

| A/D3 | A/D2 | A/D1 | A/D0 | FUNCTION |
|------|------|------|------|---|
| 0 | 0 | 0 | 0 | Configures the ADC reference as selected by RES [1:0] bits as shown in Table 13. No measurement is performed. |
| 0 | 0 | 0 | 1 | Measures X/Y touch position and returns results to the X and Y data registers. |
| 0 | 0 | 1 | 0 | Measures X/Y touch position and Z1/ Z2 touch pressure and returns results to the X, Y, Z1, and Z2 data registers. |
| 0 | 0 | 1 | 1 | Measures X touch position and returns results to the X data register. |
| 0 | 1 | 0 | 0 | Measures Y touch position and returns results to the Y data register. |
| 0 | 1 | 0 | 1 | Measures Z1/Z2 touch pressure and returns results to the Z1 and Z2 data register. |
| 0 | 1 | 1 | 0 | Measures Battery Input 1 and returns results to the BAT1 data register. |
| 0 | 1 | 1 | 1 | Measures Battery Input 2 and returns results to the BAT2 data register. |
| 1 | 0 | 0 | 0 | Measures Auxiliary Input 1 and returns results to the AUX1 data register. |
| 1 | 0 | 0 | 1 | Measures Auxiliary Input 2 and returns results to the AUX2 data register. |
| 1 | 0 | 1 | 0 | Measures temperature (single ended) and returns results to the TEMP1 data register. |
| 1 | 0 | 1 | 1 | Measures Battery Input 1, Battery Input 2, Auxiliary Input 1, Auxiliary Input 2, and temperature (differential), and returns results to the appropriate data registers. |
| 1 | 1 | 0 | 0 | Measures temperature (differential) and returns results to the TEMP1 and TEMP2 data registers. |
| 1 | 1 | 0 | 1 | Turns on Y+, Y- drivers. No measurement is performed. |
| 1 | 1 | 1 | 0 | Turns on X+, X- drivers. No measurement is performed. |
| 1 | 1 | 1 | 1 | Turns on Y+, X- drivers. No measurement is performed. |

Table 8. ADC Resolution Control

| RES1 | RES0 | ADC RESOLUTION | INTERNALLY TIMED REFERENCE POWER-UP DELAY* (μs) |
|------|------|----------------|--|
| 0 | 0 | 8 bit | 31 |
| 0 | 1 | 8 bit | 31 |
| 1 | 0 | 10 bit | 37 |
| 1 | 1 | 12 bit | 44 |

*Applicable only for temperature, battery, or auxiliary measurements in auto power-up reference mode.

Table 10. ADC Conversion Rate Control

| CNR1 | CNR0 | FUNCTION |
|------|------|---|
| 0 | 0 | 3.5 μs /sample (1.5 μs acquisition, 2 μs conversion) |
| 0 | 1 | 3.5 μs /sample (1.5 μs acquisition, 2 μs conversion) |
| 1 | 0 | 10 μs /sample (5 μs acquisition, 5 μs conversion) |
| 1 | 1 | 100 μs /sample (95 μs acquisition, 5 μs conversion) |

Table 9. ADC Averaging Control

| AVG1 | AVG0 | FUNCTION |
|------|------|----------------------------|
| 0 | 0 | No data averages (default) |
| 0 | 1 | 4 data averages |
| 1 | 0 | 8 data averages |
| 1 | 1 | 16 data averages |

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

Bits 1-3: Touch-Screen Settling Time Control

These bits specify the time delay from pen-touch detection to a conversion start. This allows the selection of the appropriate settling time for the touch screen being used. Table 11 shows how to set the settling time. These bits are identical, regardless of read or write.

Bit 0: ADC Internal Reference Voltage Control

This bit selects the ADC internal reference voltage, either +1.0V or +2.5V. This bit is identical, regardless of read or write. The reference control bit is shown in Table 12.

Table 11. Touch-Screen Settling Time Control*

| ST2 | ST1 | ST0 | SETTLING TIME |
|-----|-----|-----|----------------------------|
| 0 | 0 | 0 | Settling time: 0 μ s |
| 0 | 0 | 1 | Settling time: 100 μ s |
| 0 | 1 | 0 | Settling time: 500 μ s |
| 0 | 1 | 1 | Settling time: 1ms |
| 1 | 0 | 0 | Settling time: 5ms |
| 1 | 0 | 1 | Settling time: 10ms |
| 1 | 1 | 0 | Settling time: 50ms |
| 1 | 1 | 1 | Settling time: 100ms |

*Applicable only for X, Y, Z1, and Z2 measurements.

Table 12. ADC Reference Control Bit

| RFV | FUNCTION |
|-----|-----------------|
| 0 | +1.0V reference |
| 1 | +2.5V reference |

Table 13. Internal ADC Reference Auto Power-Up Control

| RES1 | RES0 | ADC REFERENCE SOURCE | ADC REFERENCE POWER MODE |
|------|------|----------------------|--|
| 0 | 0 | Internal | Power up, wait for reference to settle, and power down again for each temperature, battery, or auxiliary scan (auto power-up mode) |
| 0 | 1 | Internal | Always powered up |
| 1 | 0 | External | Always powered down |
| 1 | 1 | External | Always powered down |

Table 14. DAC Control Register

| BIT15 | BIT14 | BIT13 | BIT12 | BIT11 | BIT10 | BIT9 | BIT8 | BIT7 | BIT6 | BIT5 | BIT4 | BIT3 | BIT2 | BIT1 | BIT0 |
|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| DAPD | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Internal ADC Reference Power-Down Control

The ADC control register controls the power setting of the internal ADC reference. Zeros must be written to bits A/D3–A/D0 to control internal reference power-up followed by the appropriate logic at the RES1 and RES0 bits. Table 13 shows the internal ADC reference power-down control.

DAC Control Register

The MSB in this control register determines the power-down control of the on-board DAC. Table 14 shows the DAC control register. Writing a zero to bit 15 (DAPD) powers up the DAC, while writing a 1 powers down the DAC. Table 15 describes the DAC control register contents, while Table 16 shows the DAC power-down bit.

Keypad Control Registers

The keypad control register, keypad mask register, and keypad column mask control register control the keypad scanner in the MAX1233/MAX1234. The keypad control register (Table 17) controls scanning and debouncing, while the keypad mask register (Table 22) and the keypad column mask control register (Table 24),

Table 15. DAC Control Register Descriptions

| BIT | NAME | DESCRIPTION |
|----------|------|------------------|
| 15 (MSB) | DAPD | DAC powered down |
| [14:0] | 0 | Reserved |

Table 16. DAC Power-Down Bit

| DAPC | FUNCTION |
|------|------------------|
| 0 | DAC powered up |
| 1 | DAC powered down |

±15kV ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

Table 17. Keypad Control Register

| BIT15 | BIT14 | BIT13 | BIT12 | BIT11 | BIT10 | BIT9 | BIT8 | BIT7 | BIT6 | BIT5 | BIT4 | BIT3 | BIT2 | BIT1 | BIT0 |
|---------|---------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| KEYSTS1 | KEYSTS0 | DBN2 | DBN1 | DBN0 | HLD2 | HLD1 | HLD0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Table 18. Keypad Control Register Description

| BIT | NAME | DESCRIPTION |
|----------|---------|--|
| 15 (MSB) | KEYSTS1 | Read: keypad interrupt status; Write: set interrupt initiated keypad scans |
| 14 | KEYSTS0 | Read: keypad scan status; Write: stop keypad scan |
| 13 | DBN2 | Keypad debounce time control |
| 12 | DBN1 | Keypad debounce time control |
| 11 | DBN0 | Keypad debounce time control |
| 10 | HLD2 | Keypad hold time control |
| 9 | HLD1 | Keypad hold time control |
| 8 | HLD0 | Keypad hold time control |
| [7:0] | 0 | Reserved |

Table 19. KEYSTS1/KEYSTS0 Functions

| KEYSTS1 | KEYSTS0 | READ FUNCTION | WRITE FUNCTION |
|---------|---------|--|--|
| 0 | 0 | No button press detected; scan or debounce in progress | Scans keypad once and waits to detect a button press. Upon detection, issues an interrupt and waits for the host's instruction before scanning. |
| 1 | 0 | Button press detected; scan or debounce in progress | Stops any ongoing scan and waits to detect a button press. Upon detection, issues an interrupt and scans the keypad. |
| 0 | 1 | No button press detected; data available | Stops any ongoing scan and waits to detect a button press. Upon detection, issues an interrupt and waits for the host's instruction before scanning. |
| 1 | 1 | Button press detected; data available | Stops any ongoing scan and powers down the button press detection circuit. No button presses are detected in this mode. |

Table 20. Keypad Debounce Time Control

| DBN2 | DBN1 | DBN0 | FUNCTION (ms) |
|------|------|------|--------------------|
| 0 | 0 | 0 | Debounce time: 2 |
| 0 | 0 | 1 | Debounce time: 10 |
| 0 | 1 | 0 | Debounce time: 20 |
| 0 | 1 | 1 | Debounce time: 50 |
| 1 | 0 | 0 | Debounce time: 60 |
| 1 | 0 | 1 | Debounce time: 80 |
| 1 | 1 | 0 | Debounce time: 100 |
| 1 | 1 | 1 | Debounce time: 120 |

±15kV ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

allowing certain keys to be masked from detection. Tables 18–21 show the programmable bits of the keypad control register. Tables 23, 24, and 25 show the programmable bits of the keypad mask registers. The *Keypad Controller and GPIO* section provides more details.

allow the keypad controller's row and column inputs to be configured as up to eight parallel I/O pins. Tables 26 and 27 show the GPIO control register layout and control register descriptions. Tables 28 and 29 show the GPIO pullup disable register and associated descriptions. For more information, see the *Applications Information* section.

GPIO Control Register

The GPIO control register and the GPIO pullup register

Table 21. Keypad Hold Time Control

| HLD2 | HLD1 | HLD0 | FUNCTION |
|------|------|------|--|
| 0 | 0 | 0 | If a button is held, wait 100μs before beginning next debounce scan |
| 0 | 0 | 1 | If a button is held, wait 1 debounce time before beginning the next debounce scan |
| 0 | 1 | 0 | If a button is held, wait 2 debounce times before beginning the next debounce scan |
| 0 | 1 | 1 | If a button is held, wait 3 debounce times before beginning the next debounce scan |
| 1 | 0 | 0 | If a button is held, wait 4 debounce times before beginning the next debounce scan |
| 1 | 0 | 1 | If a button is held, wait 5 debounce times before beginning the next debounce scan |
| 1 | 1 | 0 | If a button is held, wait 6 debounce times before beginning the next debounce scan |
| 1 | 1 | 1 | If a button is held, wait 7 debounce times before beginning the next debounce scan |

Table 22. Keypad Key Mask Control Register

| BIT15 | BIT14 | BIT13 | BIT12 | BIT11 | BIT10 | BIT9 | BIT8 | BIT7 | BIT6 | BIT5 | BIT4 | BIT3 | BIT2 | BIT1 | BIT0 |
|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| KM15 | KM14 | KM13 | KM12 | KM11 | KM10 | KM9 | KM8 | KM7 | KM6 | KM5 | KM4 | KM3 | KM2 | KM1 | KM0 |

Table 23. Keypad Key Mask Control Register Descriptions—Individual Mask

| BIT | NAME | DESCRIPTION |
|-----|------|--|
| 15 | KM15 | Mask status register data update on individual key for row 4, column 4 |
| 14 | KM14 | Mask status register data update on individual key for row 3, column 4 |
| 13 | KM13 | Mask status register data update on individual key for row 2, column 4 |
| 12 | KM12 | Mask status register data update on individual key for row 1, column 4 |
| 11 | KM11 | Mask status register data update on individual key for row 4, column 3 |
| 10 | KM10 | Mask status register data update on individual key for row 3, column 3 |
| 9 | KM9 | Mask status register data update on individual key for row 2, column 3 |
| 8 | KM8 | Mask status register data update on individual key for row 1, column 3 |
| 7 | KM7 | Mask status register data update on individual key for row 4, column 2 |
| 6 | KM6 | Mask status register data update on individual key for row 3, column 2 |
| 5 | KM5 | Mask status register data update on individual key for row 2, column 2 |
| 4 | KM4 | Mask status register data update on individual key for row 1, column 2 |
| 3 | KM3 | Mask status register data update on individual key for row 4, column 1 |
| 2 | KM2 | Mask status register data update on individual key for row 3, column 1 |
| 1 | KM1 | Mask status register data update on individual key for row 2, column 1 |
| 0 | KM0 | Mask status register data update on individual key for row 1, column 1 |

Table 24. Keypad Column Mask Control Register

| BIT15 | BIT14 | BIT13 | BIT12 | BIT11 | BIT10 | BIT9 | BIT8 | BIT7 | BIT6 | BIT5 | BIT4 | BIT3 | BIT2 | BIT1 | BIT0 |
|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| CM4 | CM3 | CM2 | CM1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

±15kV ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

Table 25. Keypad Column Mask Control Register Descriptions

| BIT | NAME | DESCRIPTION |
|--------|------|---|
| 15 | CM4 | Mask interrupt, status register, and pending register data update on all keys in column 4 |
| 14 | CM3 | Mask interrupt, status register, and pending register data update on all keys in column 3 |
| 13 | CM2 | Mask interrupt, status register, and pending register data update on all keys in column 2 |
| 12 | CM1 | Mask interrupt, status register, and pending register data update on all keys in column 1 |
| [11:0] | 0 | Reserved |

Table 26. GPIO Control Register

| BIT15 | BIT14 | BIT13 | BIT12 | BIT11 | BIT10 | BIT9 | BIT8 | BIT7 | BIT6 | BIT5 | BIT4 | BIT3 | BIT2 | BIT1 | BIT0 |
|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| GP7 | GP6 | GP5 | GP4 | GP3 | GP2 | GP1 | GP0 | OE7 | OE6 | OE5 | OE4 | OE3 | OE2 | OE1 | OE0 |

Table 27. GPIO Control Register Descriptions

| BIT | NAME | DESCRIPTION | |
|-------|-----------|----------------------------------|---------------------------------|
| | | 1 | 0 |
| 15 | GP7 | C4 pin becomes GPIO pin 7 | C4 pin remains keypad column 4 |
| 14 | GP6 | C3 pin becomes GPIO pin 6 | C3 pin remains keypad column 3 |
| 13 | GP5 | C2 pin becomes GPIO pin 5 | C2 pin remains keypad column 2 |
| 12 | GP4 | C1 pin becomes GPIO pin 4 | C1 pin remains keypad column 1 |
| 11 | GP3 | R4 pin becomes GPIO pin 3 | R4 pin remains keypad row 4 |
| 10 | GP2 | R3 pin becomes GPIO pin 2 | R3 pin remains keypad row 3 |
| 9 | GP1 | R2 pin becomes GPIO pin 1 | R2 pin remains keypad row 2 |
| 8 | GP0 | R1 pin becomes GPIO pin 0 | R1 pin remains keypad row 1 |
| [7:0] | [OE7:OE0] | GPIO pin configured as an output | GPIO pin configured as an input |

Table 28. GPIO Pullup Disable Register

| BIT15 | BIT14 | BIT13 | BIT12 | BIT11 | BIT10 | BIT9 | BIT8 | BIT7 | BIT6 | BIT5 | BIT4 | BIT3 | BIT2 | BIT1 | BIT0 |
|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| PU7 | PU6 | PU5 | PU4 | PU3 | PU2 | PU1 | PU0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Table 29. GPIO Pullup Disable Register Descriptions

| BIT | NAME | DESCRIPTION |
|--------|-----------|--|
| [15:8] | [PU7:PU0] | 1: Pullup disabled. Open collector output. 2: Pullup enabled. |
| [7:0] | 0 | Reserved |

Data Registers

The data results from conversions or keypad scans are held in the data registers of the MAX1233/MAX1234. During power-up, all of these data registers with the exception of the DAC data register default to 0000H. The DAC register defaults to 1000H.

Analog Input Data Registers

Table 30 shows the format of the X, Y, Z₁, Z₂, BAT₁, BAT₂, AUX₁, AUX₂, TEMP₁, and TEMP₂ data registers. The data format for these registers is right justified beginning with bit 11. Data written through the serial interface to these registers is not stored.

Keypad Data Registers

Table 31 shows the formatting of the keypad data registers, while Tables 32, 33, and 34 provide individual register bit descriptions. These registers have the same format as the keypad mask register. Each bit represents one key on the keypad. Table 35 shows a map of a 16-key keypad. Data written through the serial interface to these registers is not stored.

±15kV ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

Table 30. Analog Inputs Data Register Format

| REGISTER NAME | BIT15 | BIT14 | BIT13 | BIT12 | BIT11 | BIT10 | BIT9 | BIT8 | BIT7 | BIT6 | BIT5 | BIT4 | BIT3 | BIT2 | BIT1 | BIT0 |
|---------------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| X | 0 | 0 | 0 | 0 | X11 | X10 | X9 | X8 | X7 | X6 | X5 | X4 | X3 | X2 | X1 | X0 |
| Y | 0 | 0 | 0 | 0 | Y11 | Y10 | Y9 | Y8 | Y7 | Y6 | Y5 | Y4 | Y3 | Y2 | Y1 | Y0 |
| Z1 | 0 | 0 | 0 | 0 | Z1_11 | Z1_10 | Z1_9 | Z1_8 | Z1_7 | Z1_6 | Z1_5 | Z1_4 | Z1_3 | Z1_2 | Z1_1 | Z1_0 |
| Z2 | 0 | 0 | 0 | 0 | Z2_11 | Z2_10 | Z2_9 | Z2_8 | Z2_7 | Z2_6 | Z2_5 | Z2_4 | Z2_3 | Z2_2 | Z2_1 | Z2_0 |
| BATT1 | 0 | 0 | 0 | 0 | B1_11 | B1_10 | B1_9 | B1_8 | B1_7 | B1_6 | B1_5 | B1_4 | B1_3 | B1_2 | B1_1 | B1_0 |
| BATT2 | 0 | 0 | 0 | 0 | B2_11 | B2_10 | B2_9 | B2_8 | B2_7 | B2_6 | B2_5 | B2_4 | B2_3 | B2_2 | B2_1 | B2_0 |
| AUX1 | 0 | 0 | 0 | 0 | A1_11 | A1_10 | A1_9 | A1_8 | A1_7 | A1_6 | A1_5 | A1_4 | A1_3 | A1_2 | A1_1 | A1_0 |
| AUX2 | 0 | 0 | 0 | 0 | A2_11 | A2_10 | A2_9 | A2_8 | A2_7 | A2_6 | A2_5 | A2_4 | A2_3 | A2_2 | A2_1 | A2_0 |
| TEMP1 | 0 | 0 | 0 | 0 | T1_11 | T1_10 | T1_9 | T1_8 | T1_7 | T1_6 | T1_5 | T1_4 | T1_3 | T1_2 | T1_1 | T1_0 |
| TEMP2 | 0 | 0 | 0 | 0 | T2_11 | T2_10 | T2_9 | T2_8 | T2_7 | T2_6 | T2_5 | T2_4 | T2_3 | T2_2 | T2_1 | T2_0 |

Table 31. Keypad Data Registers

| REGISTER NAME | BIT15 | BIT14 | BIT13 | BIT12 | BIT11 | BIT10 | BIT9 | BIT8 | BIT7 | BIT6 | BIT5 | BIT4 | BIT3 | BIT2 | BIT1 | BIT0 |
|---------------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| KBD | K15 | K14 | K13 | K12 | K11 | K10 | K9 | K8 | K7 | K6 | K5 | K4 | K3 | K2 | K1 | K0 |
| KPData1 | K1_15 | K1_14 | K1_13 | K1_12 | K1_11 | K1_10 | K1_9 | K1_8 | K1_7 | K1_6 | K1_5 | K1_4 | K1_3 | K1_2 | K1_1 | K1_0 |
| KPData2 | K2_15 | K2_14 | K2_13 | K2_12 | K2_11 | K2_10 | K2_9 | K2_8 | K2_7 | K2_6 | K2_5 | K2_4 | K2_3 | K2_2 | K2_1 | K2_0 |

Table 32. Keypad Data Register Descriptions

| BIT | NAME | DESCRIPTION |
|-----|------|--|
| 15 | K15 | Keypad scan result for row 4, column 4. Can only be masked by column mask. |
| 14 | K14 | Keypad scan result for row 3, column 4. Can only be masked by column mask. |
| 13 | K13 | Keypad scan result for row 2, column 4. Can only be masked by column mask. |
| 12 | K12 | Keypad scan result for row 1, column 4. Can only be masked by column mask. |
| 11 | K11 | Keypad scan result for row 4, column 3. Can only be masked by column mask. |
| 10 | K10 | Keypad scan result for row 3, column 3. Can only be masked by column mask. |
| 9 | K9 | Keypad scan result for row 2, column 3. Can only be masked by column mask. |
| 8 | K8 | Keypad scan result for row 1, column 3. Can only be masked by column mask. |
| 7 | K7 | Keypad scan result for row 4, column 2. Can only be masked by column mask. |
| 6 | K6 | Keypad scan result for row 3, column 2. Can only be masked by column mask. |
| 5 | K5 | Keypad scan result for row 2, column 2. Can only be masked by column mask. |
| 4 | K4 | Keypad scan result for row 1, column 2. Can only be masked by column mask. |
| 3 | K3 | Keypad scan result for row 4, column 1. Can only be masked by column mask. |
| 2 | K2 | Keypad scan result for row 3, column 1. Can only be masked by column mask. |
| 1 | K1 | Keypad scan result for row 2, column 1. Can only be masked by column mask. |
| 0 | K0 | Keypad scan result for row 1, column 1. Can only be masked by column mask. |

±15kV ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

Table 33. Keypad Data Register 1 (Status Register) Descriptions

| BIT | NAME | DESCRIPTION |
|-----|-------|---|
| 15 | K1_15 | Keypad scan result for row 4, column 4. Can be masked by key mask or column mask. |
| 14 | K1_14 | Keypad scan result for row 3, column 4. Can be masked by key mask or column mask. |
| 13 | K1_13 | Keypad scan result for row 2, column 4. Can be masked by key mask or column mask. |
| 12 | K1_12 | Keypad scan result for row 1, column 4. Can be masked by key mask or column mask. |
| 11 | K1_11 | Keypad scan result for row 4, column 3. Can be masked by key mask or column mask. |
| 10 | K1_10 | Keypad scan result for row 3, column 3. Can be masked by key mask or column mask. |
| 9 | K1_9 | Keypad scan result for row 2, column 3. Can be masked by key mask or column mask. |
| 8 | K1_8 | Keypad scan result for row 1, column 3. Can be masked by key mask or column mask. |
| 7 | K1_7 | Keypad scan result for row 4, column 2. Can be masked by key mask or column mask. |
| 6 | K1_6 | Keypad scan result for row 3, column 2. Can be masked by key mask or column mask. |
| 5 | K1_5 | Keypad scan result for row 2, column 2. Can be masked by key mask or column mask. |
| 4 | K1_4 | Keypad scan result for row 1, column 2. Can be masked by key mask or column mask. |
| 3 | K1_3 | Keypad scan result for row 4, column 1. Can be masked by key mask or column mask. |
| 2 | K1_2 | Keypad scan result for row 3, column 1. Can be masked by key mask or column mask. |
| 1 | K1_1 | Keypad scan result for row 2, column 1. Can be masked by key mask or column mask. |
| 0 | K1_0 | Keypad scan result for row 1, column 1. Can be masked by key mask or column mask. |

Table 34. Keypad Data Register 2 (Pending Register) Descriptions

| BIT | NAME | DESCRIPTION |
|-----|-------|--|
| 15 | K2_15 | Keypad scan result for row 4, column 4. Can only be masked by column mask. |
| 14 | K2_14 | Keypad scan result for row 3, column 4. Can only be masked by column mask. |
| 13 | K2_13 | Keypad scan result for row 2, column 4. Can only be masked by column mask. |
| 12 | K2_12 | Keypad scan result for row 1, column 4. Can only be masked by column mask. |
| 11 | K2_11 | Keypad scan result for row 4, column 3. Can only be masked by column mask. |
| 10 | K2_10 | Keypad scan result for row 3, column 3. Can only be masked by column mask. |
| 9 | K2_9 | Keypad scan result for row 2, column 3. Can only be masked by column mask. |
| 8 | K2_8 | Keypad scan result for row 1, column 3. Can only be masked by column mask. |
| 7 | K2_7 | Keypad scan result for row 4, column 2. Can only be masked by column mask. |
| 6 | K2_6 | Keypad scan result for row 3, column 2. Can only be masked by column mask. |
| 5 | K2_5 | Keypad scan result for row 2, column 2. Can only be masked by column mask. |
| 4 | K2_4 | Keypad scan result for row 1, column 2. Can only be masked by column mask. |
| 3 | K2_3 | Keypad scan result for row 4, column 1. Can only be masked by column mask. |
| 2 | K2_2 | Keypad scan result for row 3, column 1. Can only be masked by column mask. |
| 1 | K2_1 | Keypad scan result for row 2, column 1. Can only be masked by column mask. |
| 0 | K2_0 | Keypad scan result for row 1, column 1. Can only be masked by column mask. |

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

DAC Data Register

The DAC data register stores data that is to be written to the 8-bit DAC. Table 36 shows the configuration of the DAC data register. It is right justified with bit 7–bit 0 storing the input data.

GPIO Data Register

Tables 37 and 38 show the format and descriptions for the GPIO data register. The register is left justified with data in bit 15–bit 8. Reading the GPIO data register gives the state of the R_ and C_ pins. Data written to the GPIO data register appears on those R_ and C_ pins, which are configured as general-purpose outputs. Data written to pins not configured as general-purpose outputs is not stored.

ADC Transfer Function

The MAX1233/MAX1234 output data is in straight binary format as shown in Figure 11. This figure shows the ideal output code for the given input voltage and does not include the effects of offset error, gain error, noise, or nonlinearity.

Table 35. Keypad to Key Bit Mapping

| COMPONENT | C1 | C2 | C3 | C4 |
|-----------|----|----|-----|-----|
| R1 | K0 | K4 | K8 | K12 |
| R2 | K1 | K5 | K9 | K13 |
| R3 | K2 | K6 | K10 | K14 |
| R4 | K3 | K7 | K11 | K15 |

Table 36. DAC Data Register

| BIT15 | BIT14 | BIT13 | BIT12 | BIT11 | BIT10 | BIT9 | BIT8 | BIT7 | BIT6 | BIT5 | BIT4 | BIT3 | BIT2 | BIT1 | BIT0 |
|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | DA7 | DA6 | DA5 | DA4 | DA3 | DA2 | DA1 | DA0 |

Table 37. GPIO Data Register

| BIT15 | BIT14 | BIT13 | BIT12 | BIT11 | BIT10 | BIT9 | BIT8 | BIT7 | BIT6 | BIT5 | BIT4 | BIT3 | BIT2 | BIT1 | BIT0 |
|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| GPD7 | GPD6 | GPD5 | GPD4 | GPD3 | GPD2 | GPD1 | GPD0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Table 38. GPIO Data Register Descriptions

| BIT | NAME | DESCRIPTION |
|--------|----------|------------------------------------|
| 15...8 | GPD7...0 | GPIO data bits for GPIO pins 7...0 |
| 7...0 | 0 | Reserved |

Applications Information

Programmable 8-/10-/12-Bit Resolution

The MAX1233/MAX1234 provide the option of three different resolutions for the ADC: 8, 10, or 12 bits. Lower resolutions are practical for some measurements such as touch pressure. Lower resolution conversions have smaller conversion times and therefore consume less power. Program the resolution of the MAX1233/MAX1234 12-bit ADCs by writing to the RES1 and RES0 bits in the ADC control register. When the MAX1233/MAX1234 power up, both bits are set to zero so the resolution is set to 8 bits with a 31 μs internally timed reference power-up delay as indicated by the ADC resolution control table. As explained in the control register section, the RES1 and RES0 bits control the reference

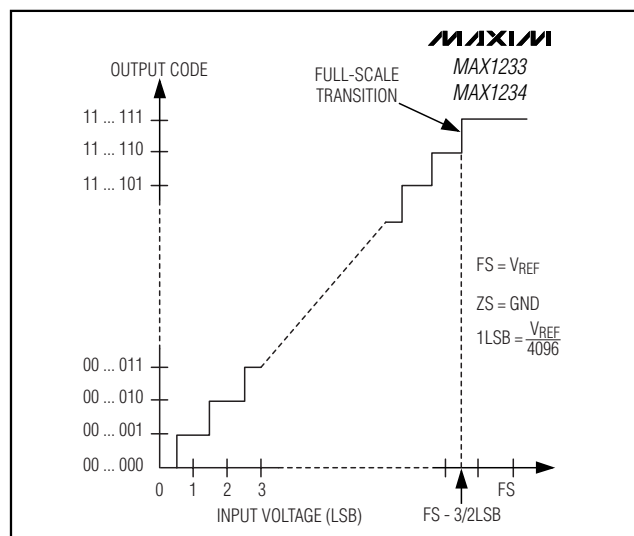


Figure 11. Ideal Input Voltages and Output Codes

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

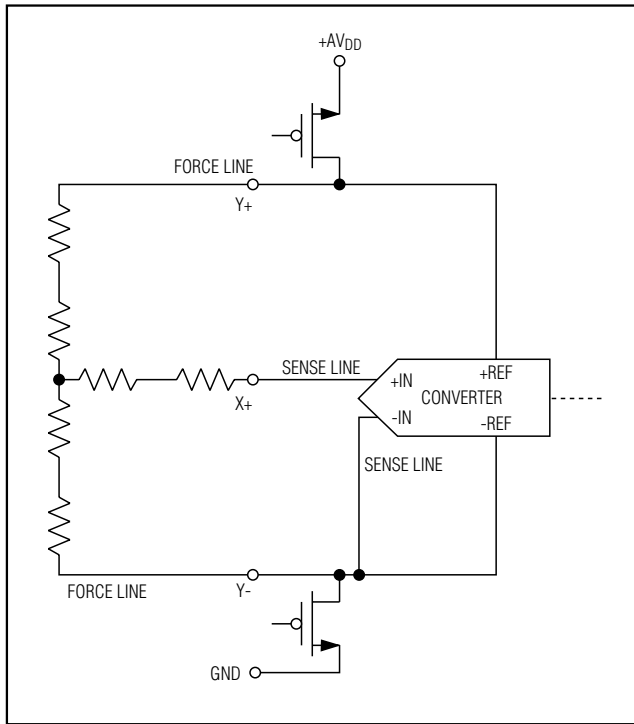


Figure 12. Ratiometric Y-Coordinate Measurement

power-up status when the A/D0–A/D3 bits are zero. These values can be set initially on power-up. (Subsequently A/D0–A/D3 bits are not zero, and any other value of these bits is exclusive to ADC resolution programming.)

Differential Ratiometric Touch-Position Measurement

The MAX1233/MAX1234 provide differential conversions. Figure 12 shows the switching matrix configuration for Y coordinate measurement. The +REF and -REF inputs are connected directly to Y+ and Y-. The conversion result is a percentage of the external resistances, and is unaffected by variation in the total touch-screen resistance or the on-resistance of the internal switching matrix. The touch screen remains powered during the acquisition and conversion process.

Touch-Screen Settling

There are two mechanisms that affect the voltage level at the point where the touch panel is pressed. One is electrical ringing due to parasitic capacitance between the top and bottom layers of the touch screen and the other is the mechanical bouncing caused by vibration of the top layer of the touch screen. Thus, the input sig-

nal, reference, or both may not settle into their final steady-state values before the ADC samples the inputs, and the reference voltage may continue to change during the conversion cycle. The MAX1233/MAX1234 can be programmed to wait for a fixed amount of time after a screen touch has been detected before beginning a scan. Use the touch-screen settling control bits in the ADC control register (Table 11) to set the settling delay to between zero and 100ms.

The settling problem is amplified in some applications where external filter capacitors may be required across the touch screen to filter noise that may be generated by the LCD panel or backlight circuitry, etc. The values of these capacitors cause an additional settling time requirement when the panel is touched. Any failure to settle before conversion start may show up as a gain error. Average the conversion result by writing to the ADC control register, as shown in Table 10, to minimize noise.

Touch-Pressure Measurement

The MAX1233/MAX1234 provide two methods of measurement of the pressure applied to the touch screen. Although 8-bit resolution is typically sufficient, the following calculations use 12-bit resolution demonstrating the maximum precision of the MAX1233/MAX1234. Figure 13 shows the pressure measurement block diagram.

The first method performs pressure measurements using a known X-plate resistance. After completing three conversions, X-position, Z1-position, and Z2 position, use the following equation to calculate R_{TOUCH}:

$$R_{TOUCH} = (R_{XPLATE}) \times \left(\frac{X_{POSITION}}{4096} \right) \times \left[\left(\frac{Z_2}{Z_1} \right) - 1 \right]$$

The second method requires knowing both the X-plate and Y-plate resistance. Three touch-screen conversions are required in this method as well for measurement of the X-position, Y-position, and Z-position of the touch screen. Use the following equation to calculate R_{TOUCH}:

$$R_{TOUCH} = \left\{ \left(\frac{R_{XPLATE}}{Z_1} \right) \times \left(\frac{X_{POSITION}}{4096} \right) \times \left[\left(\frac{4096}{Z_1} \right) - 1 \right] \right\} - \left\{ R_{YPLATE} \times \left(\frac{Y_{POSITION}}{4096} \right) \right\}$$

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

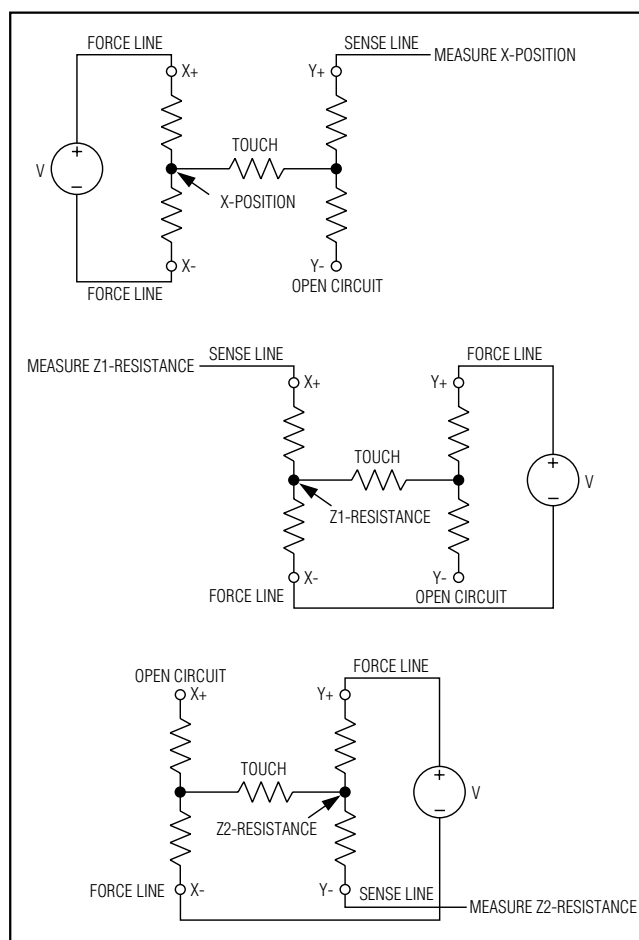


Figure 13. Pressure Measurement Block Diagram

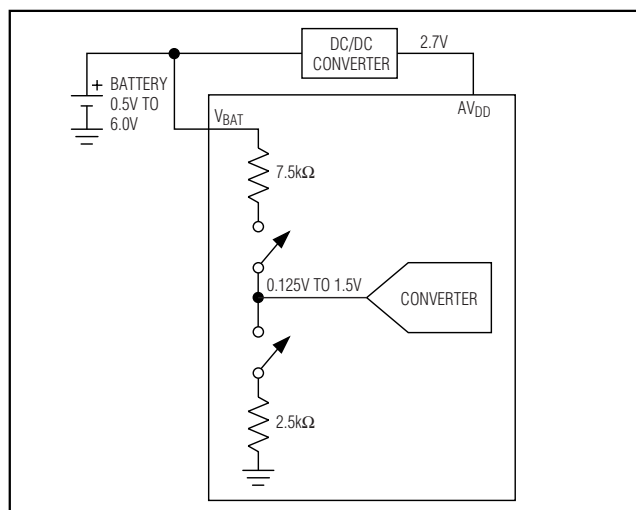


Figure 14. Battery Measurement Block Diagram

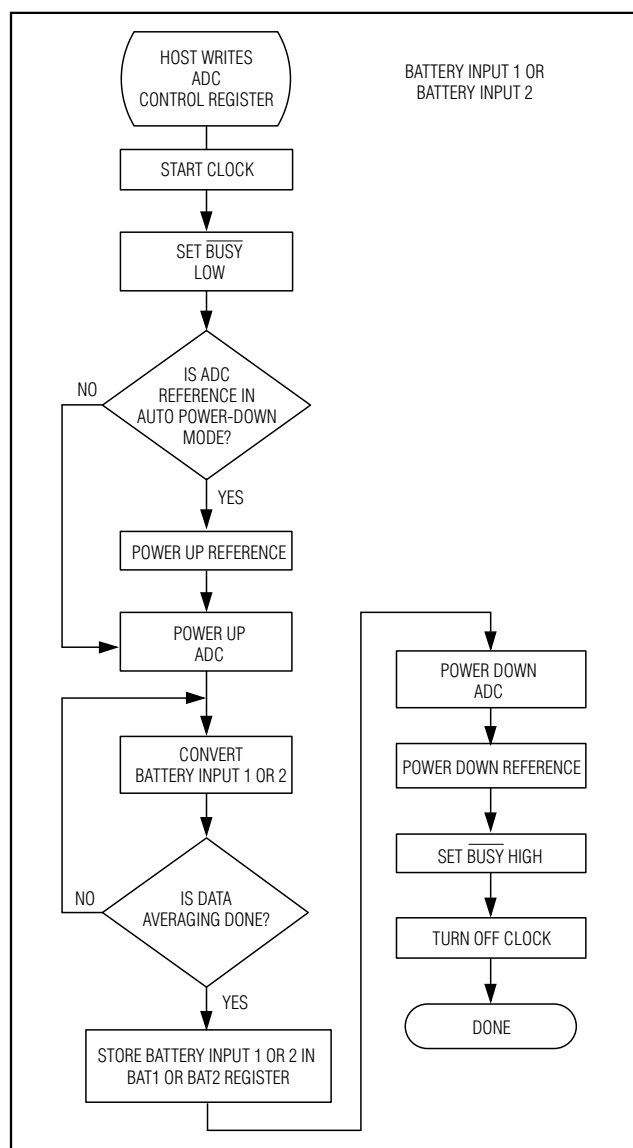


Figure 15. Battery Voltage-Reading Flowchart

Battery-Voltage Monitors

Two dedicated analog inputs (BAT1 and BAT2) allow the MAX1233/MAX1234 to monitor the battery voltages prior to the DC/DC converter. Figure 14 shows the battery voltage monitoring circuitry. The MAX1233/MAX1234 directly monitor battery voltages from 0.5V to 6V. An internal resistor network divides down BAT1 and BAT2 by 4 so that a 6V battery voltage results in a 1.5V input to the ADC. To minimize power consumption, the divider is only enabled during the sampling of BAT1 and BAT2. Figure 15 illustrates the process of battery input reading.

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

Auxiliary Analog Inputs

Two auxiliary analog inputs (AUX1 and AUX2) allow the MAX1233/MAX1234 to monitor analog input voltages from zero to V_{REF} . Figure 16 illustrates the process of auxiliary input reading.

Temperature Measurements

The MAX1233/MAX1234 provide two temperature measurement options: a single-ended conversion method and a differential conversion method. Both temperature measurement techniques rely on the semiconductor junction's operational characteristics at a fixed current level. The forward diode voltage (V_{BE}) vs. temperature is a well-defined characteristic. The ambient temperature can be predicted in applications by knowing the value of the V_{BE} voltage at a fixed temperature and then monitoring the delta of that voltage as the temperature changes. Figure 17 illustrates the functional block of the internal temperature sensor.

The single conversion method requires calibration at a known temperature, but only requires a single reading to predict the ambient temperature. First, the internal diode forward bias voltage is measured by the ADC at a known temperature. Subsequent diode measurements provide an estimate of the ambient temperature through extrapolation. This assumes a temperature coefficient of $-2.1\text{mV}/^\circ\text{C}$. The single conversion method results in a resolution of $0.29^\circ\text{C}/\text{LSB}$ (2.5V reference) and $0.12^\circ\text{C}/\text{LSB}$ (1.0V reference) with a typical accuracy of $\pm 2^\circ\text{C}$. Figure 18 shows the flowchart for the single temperature measurement.

The differential conversion method uses two measurement points. The first measurement is performed with a fixed bias current into the internal diode. The second measurement is performed with a fixed multiple of the original bias current. The voltage difference between the first and second conversion is proportional to the absolute temperature and is expressed by the following formula:

$$\Delta V_{BE} = (kT/q) \times \ln(N)$$

where:

ΔV_{BE} = difference in diode voltage

N = current ratio of the second measurement to the first measurement

k = Boltzmann's constant ($1.38 \times 10^{-23} \text{ eV}/^\circ\text{Kelvin}$)

q = electron charge ($1.60 \times 10^{-19} \text{ C}$)

T = temperature in $^\circ\text{Kelvin}$

The resultant equation solving for $^\circ\text{K}$ is:

$$T(^{\circ}\text{K}) = q \times \Delta V / (k \times \ln(N))$$

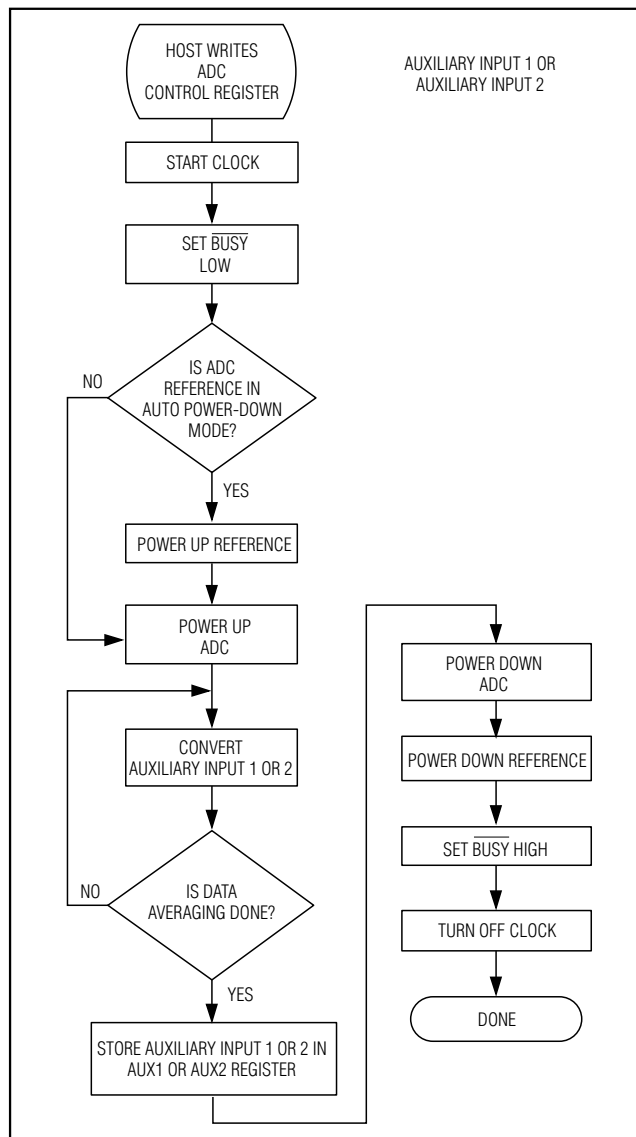


Figure 16. Auxiliary Input Flowchart

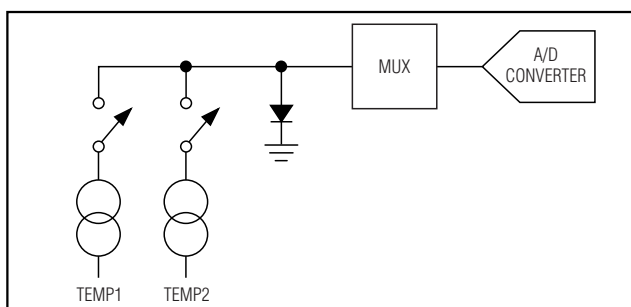


Figure 17. Internal Block Diagram of Temperature Sensor

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

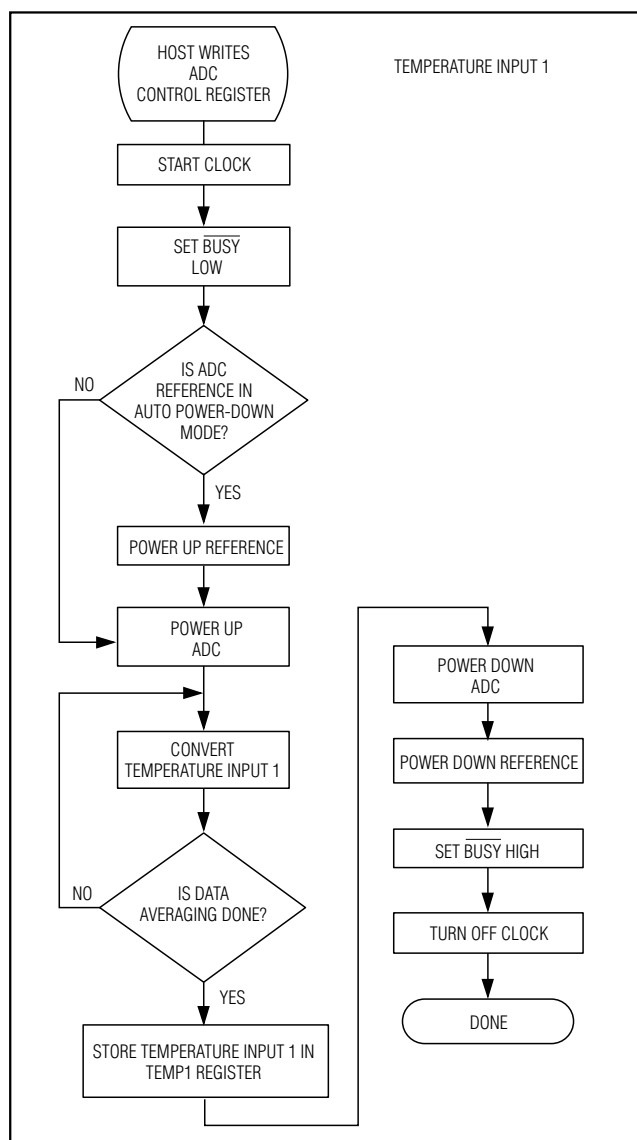


Figure 18. Single Temperature Measurement Process

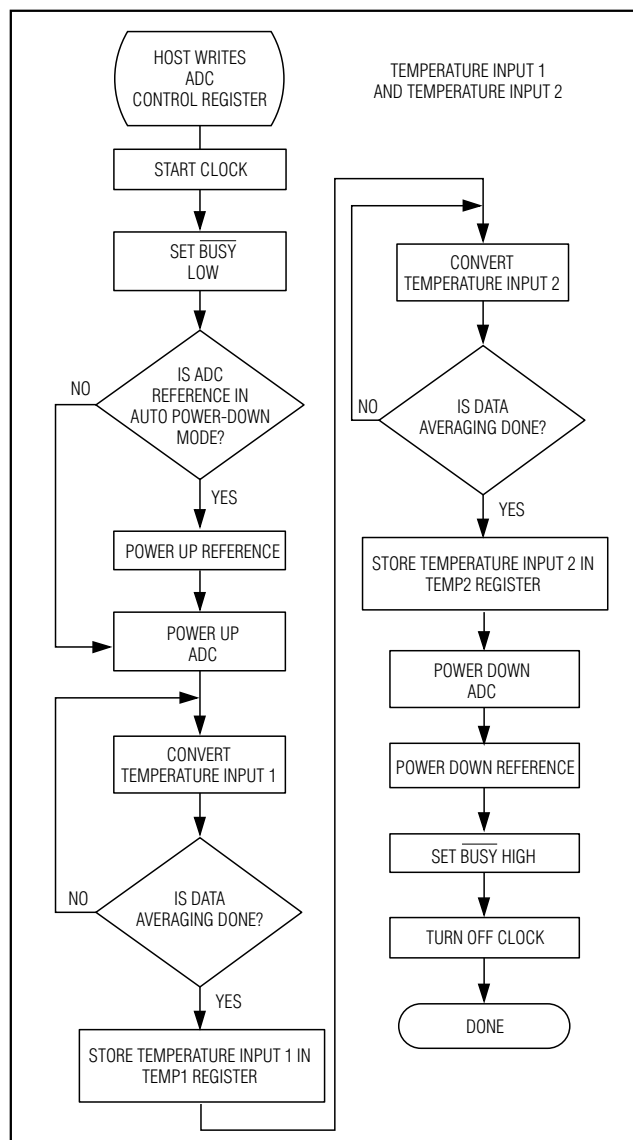


Figure 19. Differential Temperature Measurement Process

where:

$$\Delta V = V(I_N) - V(I_1) \text{ (in mV)}$$

$$T(^{\circ}\text{K}) = 2.68(^{\circ}\text{K/mV}) \times \Delta V(\text{mV})$$

$$T(^{\circ}\text{C}) = [2.68(^{\circ}\text{K/mV}) \times \Delta V(\text{mV}) - 273^{\circ}\text{K}]^{\circ}\text{C}/^{\circ}\text{K}$$

This differential conversion method does not require a test temperature calibration and can provide much improved absolute temperature measurement. In the differential conversion method, however, the resolution

is 1.6°C/LSB (2.5V reference) and 0.65°C/LSB (1V reference) with a typical accuracy of $\pm 3^{\circ}\text{C}$. Figure 19 shows the differential temperature measurement-process.

Note: The bias current for each diode temperature measurement is only turned ON during the acquisition and, therefore, does not noticeably increase power consumption.

±15kV ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

Battery Voltage, Auxiliary Input, and Temperature Input Scan

Use this scan to make periodic measurements of both battery inputs, both auxiliary inputs, and both temperature inputs. The respective data registers have the latest results at the end of each cycle. Thus, a single write by the host to the MAX1233/MAX1234 ADC control register results in six different measurements being made. Figure 20 shows this scan operation.

Touch-Initiated Screen Scans (PENSTS = 1; ADSTS = 0)

In the touch-initiated screen-scan mode, the MAX1233/MAX1234 automatically perform a touch-screen scan upon detecting a screen touch. The touch-screen scans performed are determined by the [A/D3:A/D0] written to the ADC control register. Figure 21 shows the flowchart for a complete touch-initiated X- and Y- coordinate scan. Selection of resolution, conversion rate, averaging, and touch-screen settling time determine the overall conversion time.

Figure 22 shows the complete flowchart for a touch-initiated X, Y, and Z scan.

Table 38 shows ADSTS Bit Operation.

Host-Initiated Screen Scans (PENSTS = ADSTS = 0)

In this mode, the host processor decides when a touch-screen scan begins. The MAX1233/MAX1234 detect a screen touch and drive PENIRQ LOW. The host recognizes the interrupt request and can choose to write to the ADC control register to select a touch-screen scan function (PENSTS = ADSTS = 0). Figures 23 and 24 show the process of a host-initiated screen scan.

Key-Press Initiated Debounce Scan (KEYSTS1 = 1, KEYSTS0 = 0)

In the key-press initiated debounce mode, the MAX1233/MAX1234 automatically perform a debounce upon detecting a key press. Key scanning begins once a key press has been detected and ends when a key press has been debounced (Figures 25 and 9a).

Host-Initiated Debounce Scan

In this mode, the host processor decides when a debounce scan begins. The MAX1233/MAX1234 detect a key press and drive KEYIRQ low. The host processor recognizes the interrupt request and can choose to write to the keypad control register to initiate a debounce scan (Figures 26 and 9b).

Keypad Debouncing

Keys are debounced either when (1) a key press has been detected, or (2) when commanded by the host MPU.

The keys scanned by the keypad row and column pins are debounced for a period of time (debounce period) as determined by bits [DBN2:DBN0] of the keypad control register.

The keypad controller continues scanning until the keypad stays in the same state for an entire debounce period.

Keypad Data

Keypad data can be read out of either the keypad data status register (maskable), or the keypad data pending register (not maskable). The keypad mask register is used to mask individual keys in the keypad data status register.

GPIO Control

Write to bits [GP7:GP0] of the GPIO control register to configure one or more of the R_/C_pins as a GPIO pin.

Write to bits [OE7:OE0] of the GPIO control register to configure the pins as an input or an output. GPIO data can be read from or written to the GPIO data register. A read returns the logic state of the GPIO pin. A write sets the logic state of a GPIO output pin. Writing to a GPIO input pin has no effect.

GPIO Pullup Disable Register

When programmed as GPIO output, by default, the GPIO pins are active CMOS outputs. Write a 1 to the pullup disable register to configure the GPIO output as an open-drain output.

Using the 8-Bit DAC for LCD/TFT Contrast Control

Design Example:

The 8-bit DAC offers the ability to control biasing of LCD/TFT screens. In the circuit of Figure 27, it is desired to have the MAX1677 DC-DC converter's V_{OUT} to be adjustable.

The minimum and maximum DAC voltages (V_{DAC(HIGH)} and V_{DAC(LOW)}) can be found in the *Electrical Characteristics* table.

The output voltage of the MAX1677 (V_{OUT}) can be calculated by noting the following equations:

$$V_{OUT} = V_{REFDAC} + i_1 R1 \quad [\text{Equation 1}]$$

$$i_1 = i_2 + i_3 \quad [\text{Equation 2}]$$

$$i_2 = V_{REFDAC} / R2 \quad [\text{Equation 3}]$$

$$i_3 = (V_{REFDAC} - V_{DAC}) / R3 \quad [\text{Equation 4}]$$

Substituting equations 2, 3, and 4 into equation 1 yields:

$$V_{OUT} = V_{REFDAC} + (R1 / R2) V_{REF} + (R1 / R3) (V_{REFDAC} - V_{DAC}) \quad [\text{Equation 5}]$$

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

BATTERY VOLTAGE, AUXILIARY INPUT, AND TEMPERATURE INPUT SCAN ([A/D3:A/D0] = 1011)

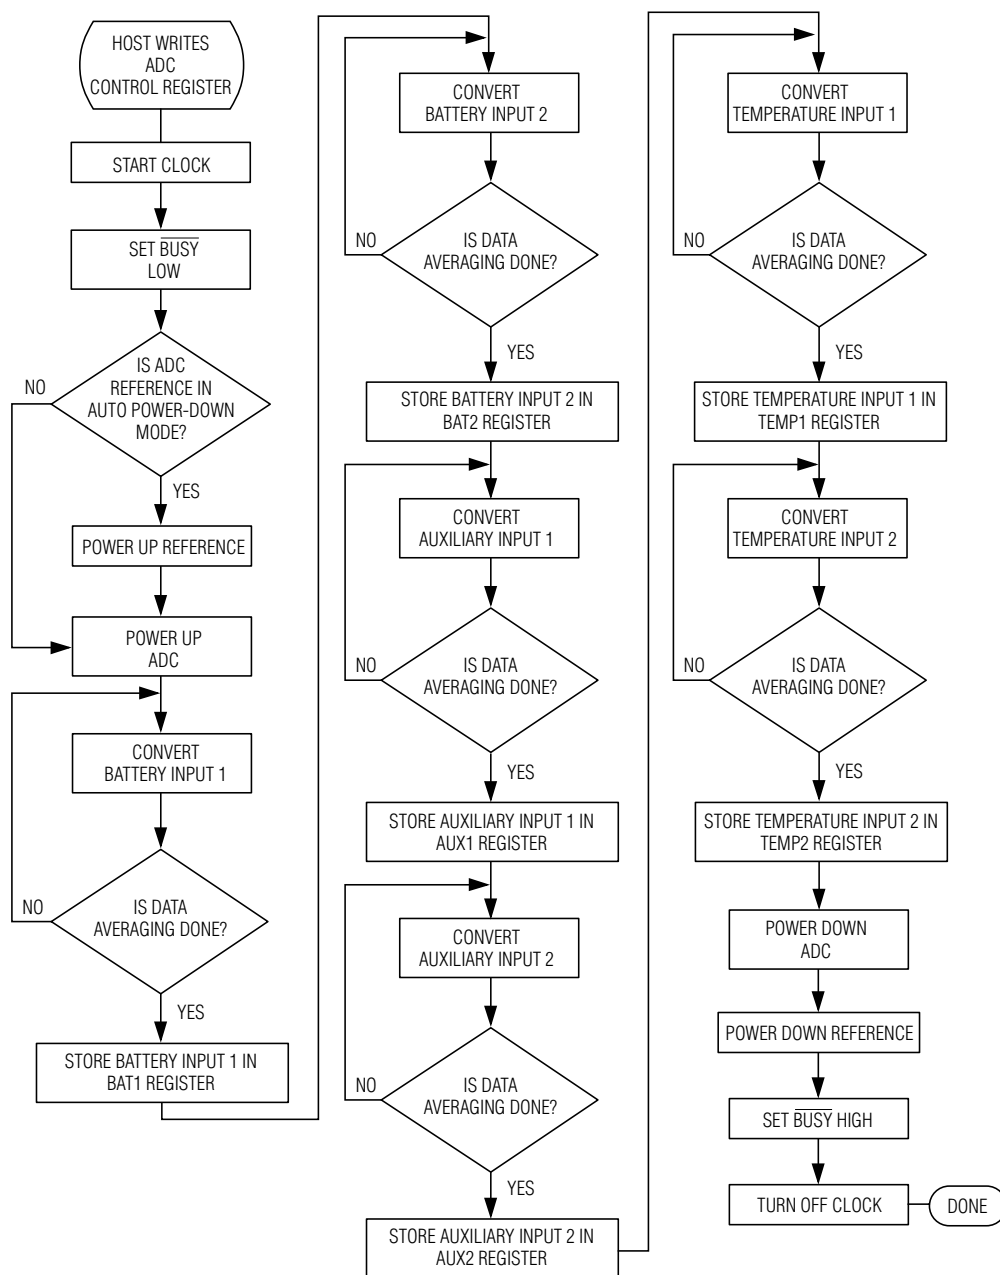


Figure 20. Scan Mode Flowchart

±15kV ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

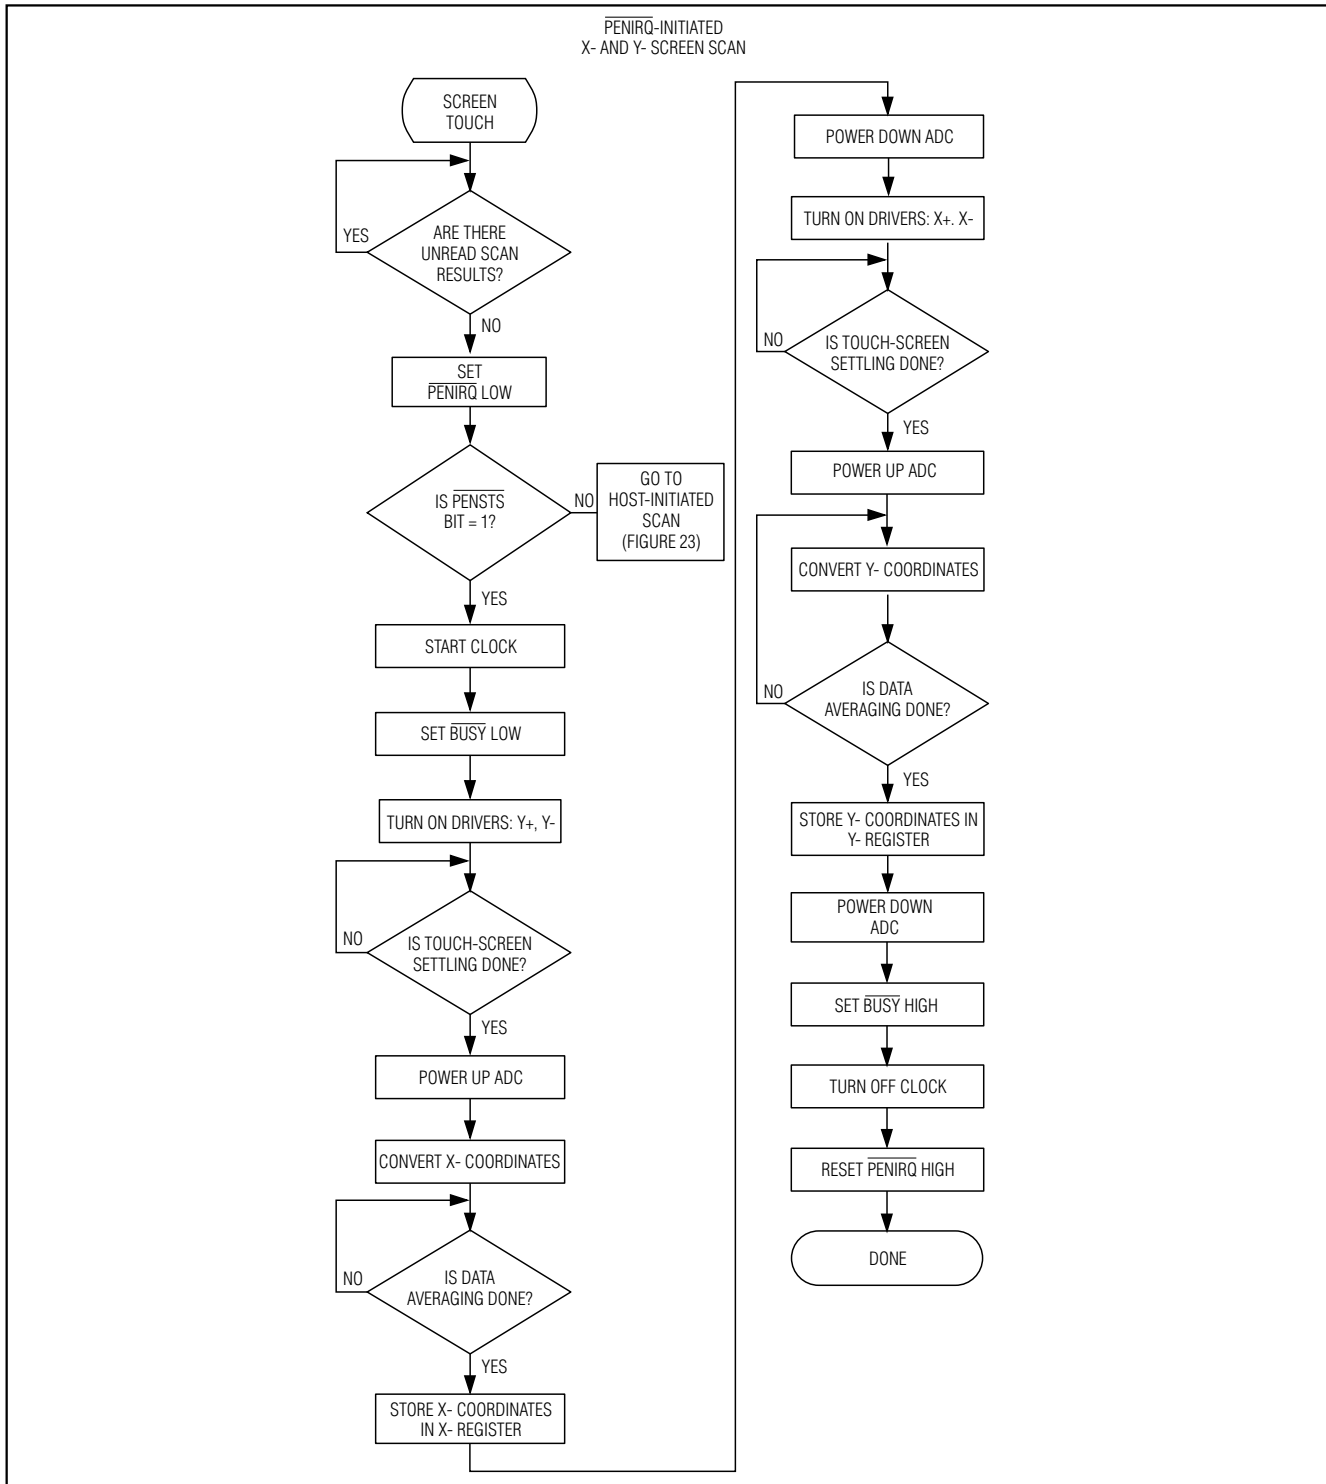


Figure 21. Touch-Initiated X- and Y- Coordinate Screen Scan

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller


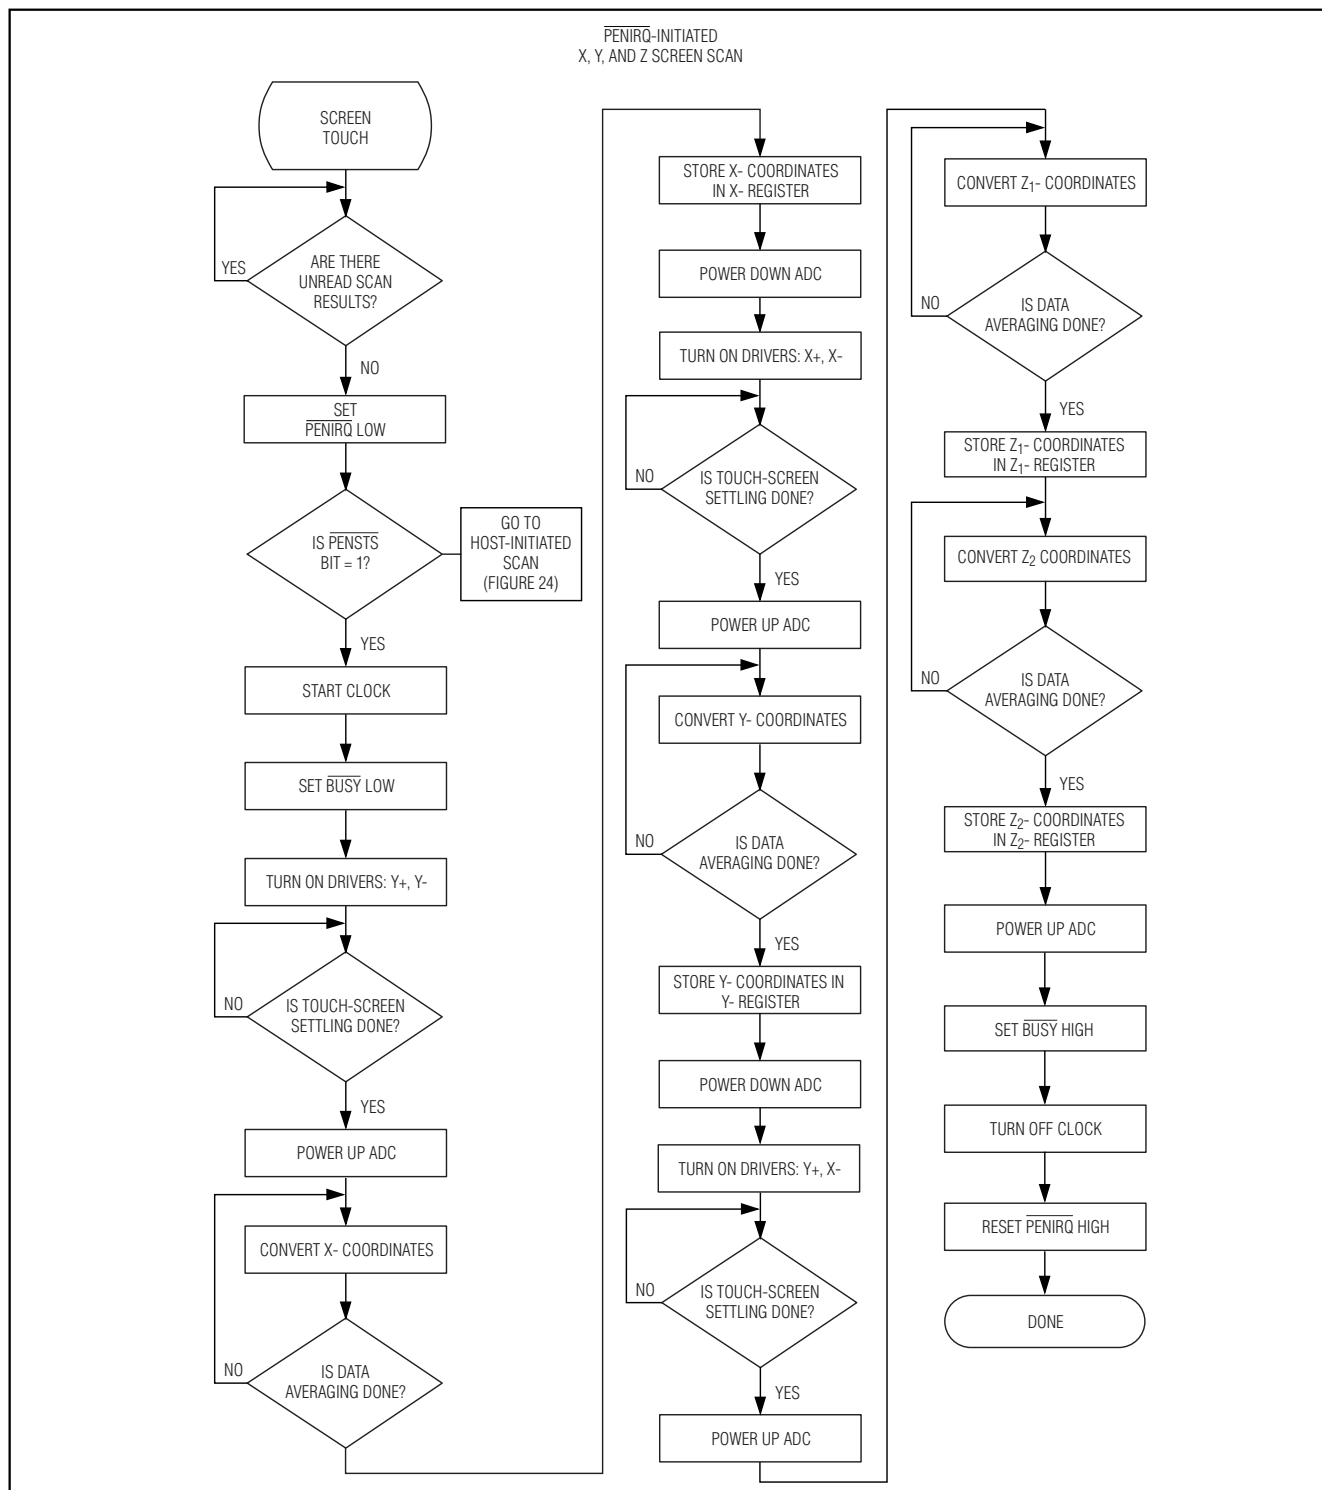


Figure 22. Touch-Initiated X-, Y-, and Z- Coordinate Screen Scan

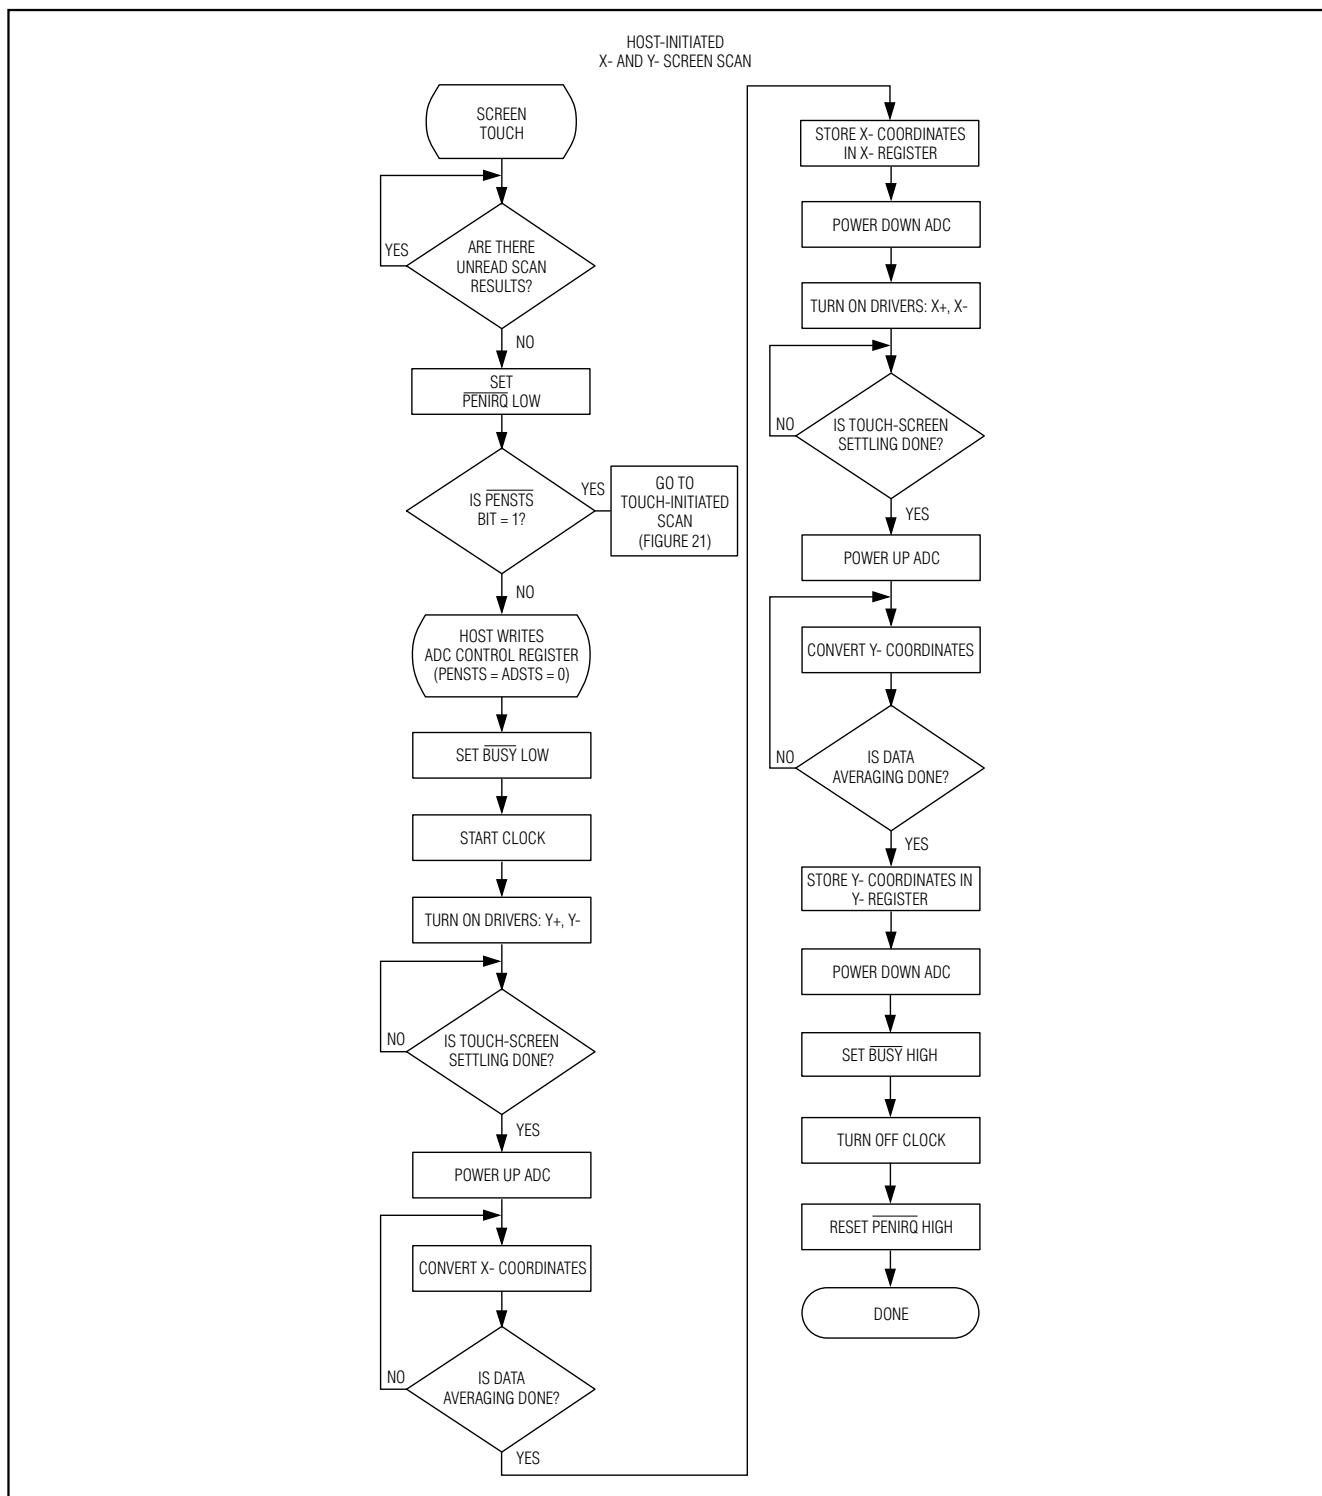

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

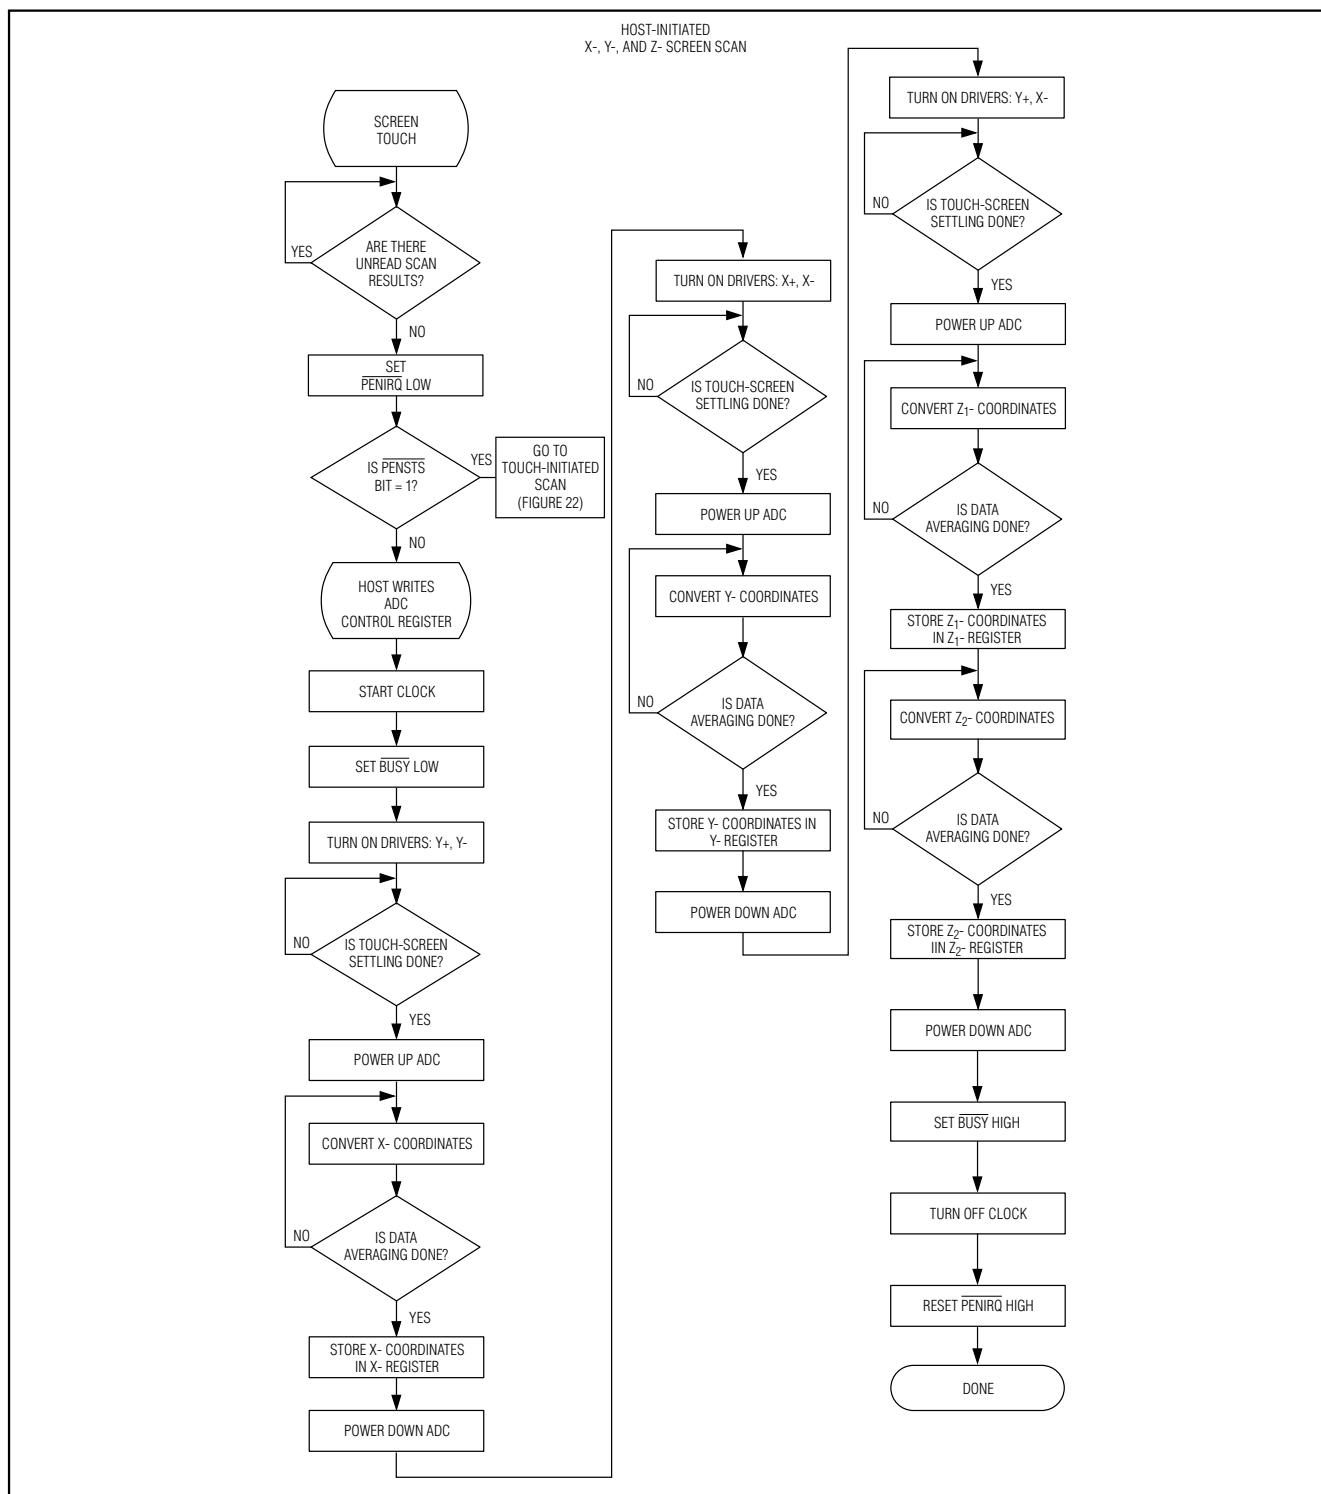


Figure 24. Host-Initiated X-, Y-, and Z- Coordinate Screen Scan

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

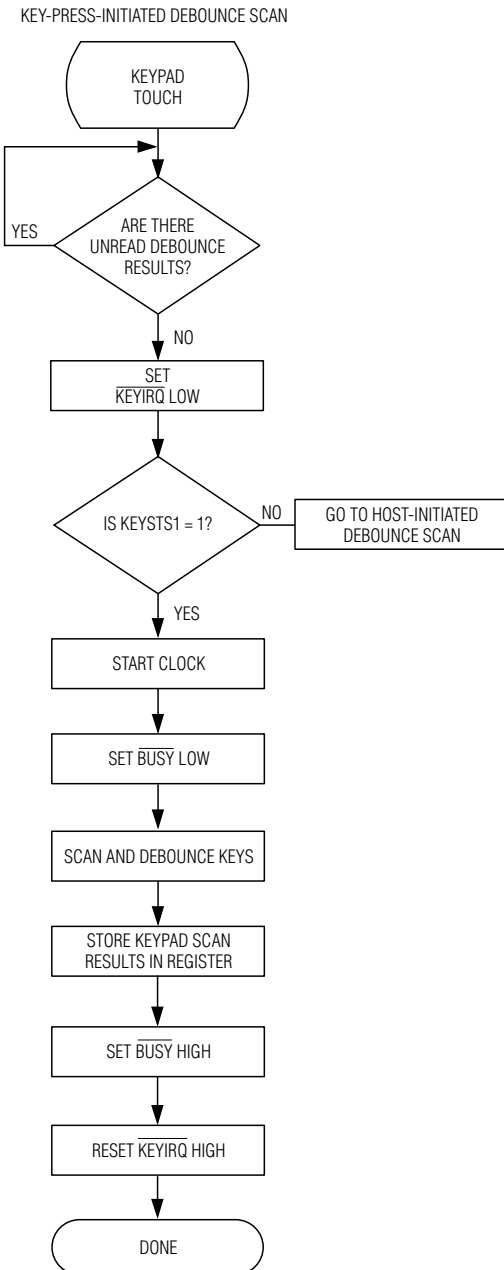


Figure 25. Key-Press-Initiated Debounce Scan

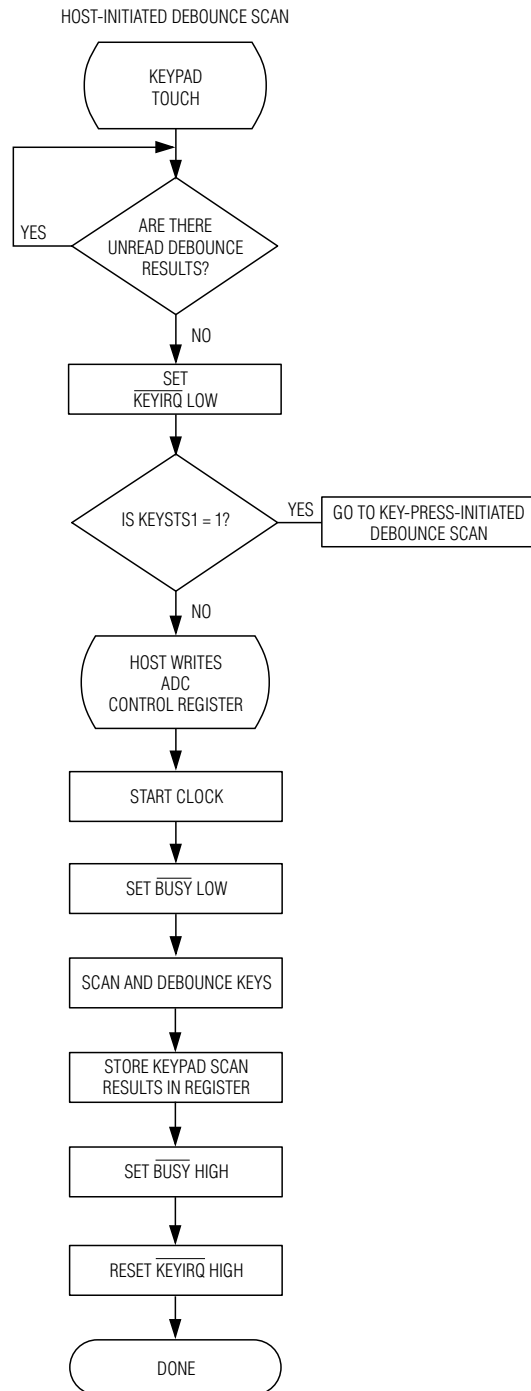


Figure 26. Host-Initiated Debounce Scan

±15kV ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

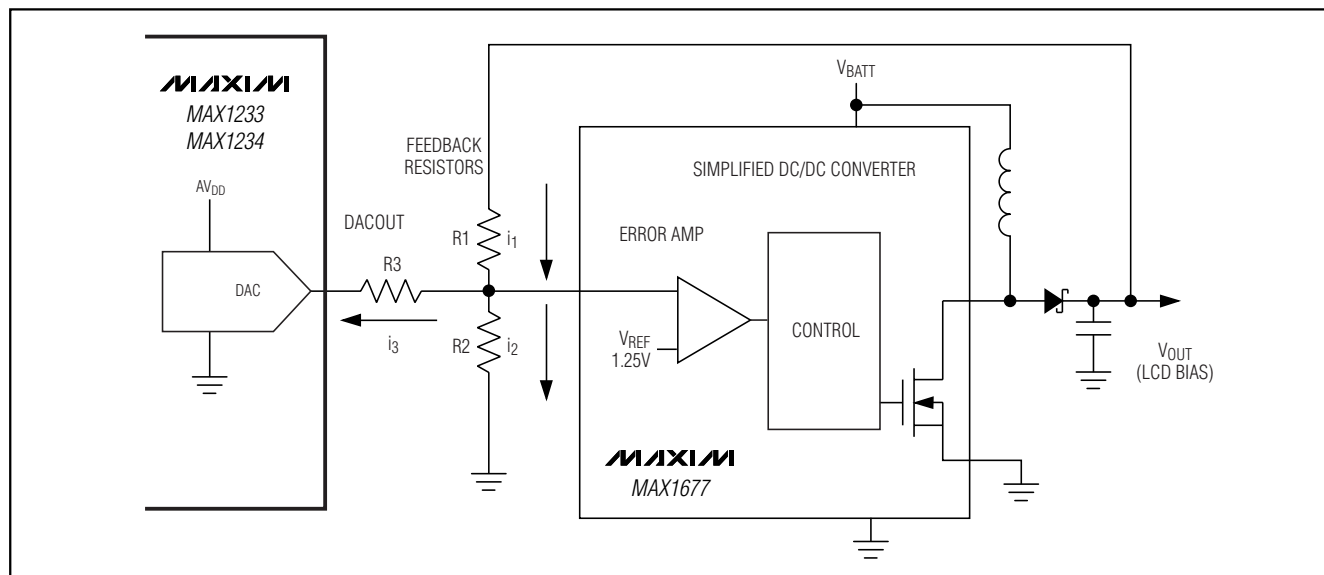


Figure 27. LCD Contrast Control Circuit

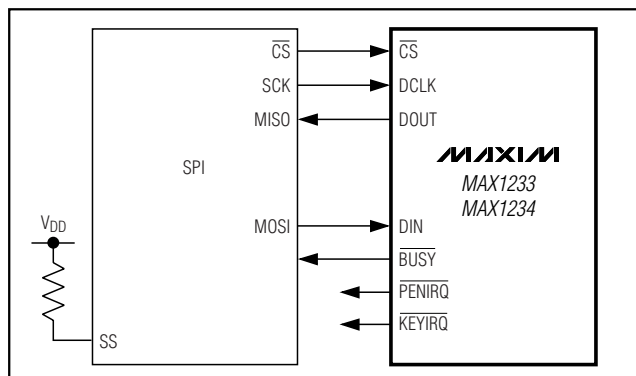


Figure 28a. SPI Interface

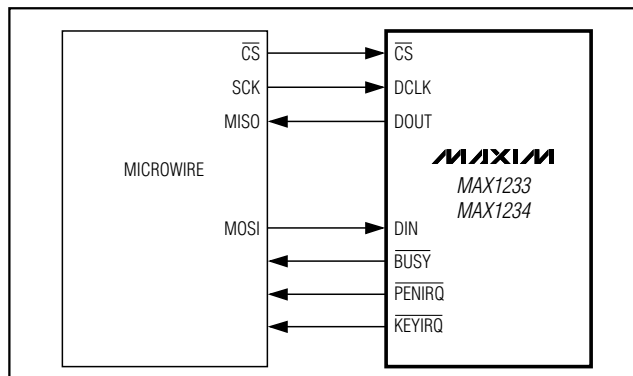


Figure 28b. MICROWIRE Interface

Equation 5 shows that the maximum output voltage occurs for the minimum DAC voltage, and that the minimum output voltage occurs for the maximum DAC voltage.

To ensure that the desired output swing is achieved, choose appropriate values of R1, R2, and R3.

Calculate VOUTMAX using the following equation:

$$V_{OUTMAX} = V_{REFMAX} + (R1_{MAX} / R2_{MIN})V_{REFMAX} + (R1_{MAX} / R3_{MIN})(V_{REFMAX} - V_{DACMIN})$$

[Equation 6]

If VOUTMAX exceeds the maximum ratings of the LCD/TFT display, the DAC codes that cause the output voltage to go too high must be avoided.

Calculate VOUTMIN using the following equation:

$$V_{OUTMIN} = V_{REFMIN} + (R1_{MIN} / R2_{MAX})V_{REFMIN} + (R1_{MAX} / R3_{MIN})(V_{REFMIN} - V_{DACMAX})$$

[Equation 7]

If VOUTMIN is too low for desired operation, avoid the DAC codes, which cause the output voltage to go too low.

Connection to Standard Interface

SPI and MICROWIRE Interfaces

When using an SPI interface (Figure 28a) or MICROWIRE (Figure 28b), set the CPOL = CPHA = 0. At least four 8-bit operations are necessary to read or write data to/from the MAX1233/MAX1234. DOUT data transitions on the serial clock's falling edge and is clocked into the μP on the DCLK's rising edge. The first

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

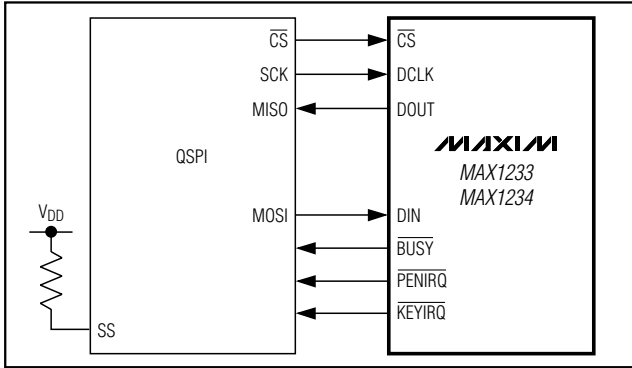


Figure 29. QSPI Interface

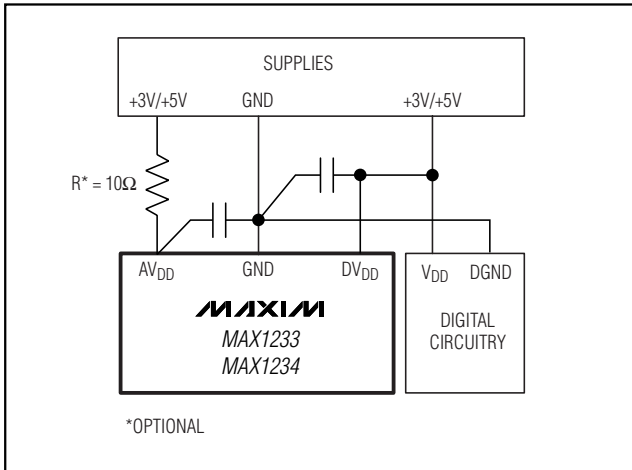


Figure 30. Power-Supply Grounding Connection

two 8-bit data streams write the command word into the MAX1233/MAX1234. The next two 8-bit data streams can contain either the input or output data.

QSPI Interface

Using the high-speed QSPI interface (Figure 29) with CPOL = 0 and CPHA = 0, the MAX1233/MAX1234 support a maximum f_{SCLK} of 10MHz. DOUT data transitions on the serial clock's falling edge and is clocked into the μP on the DCLK's rising edge.

Layout, Grounding, and Bypassing

For best performance, use printed circuit boards with good layouts; do not use wire-wrap boards even for prototyping. Ensure that digital and analog signal lines are separated from each other. Do not run analog and digital (especially clock) lines parallel to one another, or digital lines underneath the ADC package.

Figure 30 shows the recommended system ground

connections. Establish a single-point analog ground (star ground point) at GND. Connect all analog grounds to the star ground. Connect the digital system ground to the star ground at this point only. For lowest noise operation, the ground return to the star ground's power supply should be low impedance and as short as possible.

High-frequency noise in the power supply may affect the high-speed comparator in the ADC. Bypass the supply to the star ground with a $0.1\mu\text{F}$ capacitor as close to pins 1 and 2 of the MAX1233/MAX1234 as possible. Minimize capacitor lead lengths for best supply-noise rejection. If the power supply is very noisy, a 10Ω resistor can be connected as a lowpass filter.

While using the MAX1233/MAX1234 with a resistive touch screen, the interconnection between the converter and the touch screen should be as short and robust as possible. Since resistive touch screens have a low resistance, longer or loose connections are a source of error. Noise can also be a major source of error in touch-screen applications (e.g., applications that require a backlight LCD panel). This EMI noise can be coupled through the LCD panel to the touch screen and cause "flickering" of the converted data. Utilizing a touch screen with a bottom-side metal layer connected to ground couples the majority of noise to ground. In addition, the filter capacitors from Y+, Y-, X+, and X- inputs to ground also help reduce the noise further. Caution should be observed for settling time of the touch screen.

Definitions

Integral Nonlinearity

Integral nonlinearity (INL) is the deviation of the values on an actual transfer function from a straight line. This straight line can be either a best-straight-line fit or a line drawn between the end points of the transfer function, once offset and gain errors have been nullified. The static linearity parameters for the MAX1233/MAX1234 are measured using the end-point method.

Differential Nonlinearity

Differential nonlinearity (DNL) is the difference between an actual step width and the ideal value of 1LSB. A DNL error specification of less than 1LSB guarantees no missing codes and a monotonic transfer function.

Aperture Jitter

Aperture jitter (t_{AJ}) is the sample-to-sample variation in the time between the samples.

Aperture Delay

Aperture delay (t_{AD}) is the time defined between the falling edge of the sampling clock and the instant when an actual sample is taken.

$\pm 15\text{kV}$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

Signal-to-Noise Ratio

For a waveform perfectly reconstructed from digital samples, signal-to-noise ratio (SNR) is the ratio of full-scale analog input (RMS value) to the RMS quantization error (residual error). The ideal, theoretical minimum analog-to-digital noise is caused by quantization error only and results directly from the ADC's resolution (N bits):

$$\text{SNR} = (6.02 \times N + 1.76) \text{ dB}$$

In reality, there are other noise sources besides quantization noise: thermal noise, reference noise, clock jitter, etc. SNR is computed by taking the ratio of the RMS signal to the RMS noise, which includes all spectral components minus the fundamental, the first five harmonics, and the DC offset.

Signal-to-Noise Plus Distortion

Signal-to-noise plus distortion (SINAD) is the ratio of the fundamental input frequency's RMS amplitude to the RMS equivalent of all other ADC output signals:

$$\text{SINAD (dB)} = 20 \times \log (\text{Signal}_{\text{RMS}} / \text{Noise}_{\text{RMS}})$$

Effective Number of Bits

Effective number of bits (ENOB) indicates the global accuracy of an ADC at a specific input frequency and sampling rate. An ideal ADC's error consists of quantization noise only. With an input range equal to the full-scale range of the ADC, calculate the effective number of bits as follows:

$$\text{ENOB} = (\text{SINAD} - 1.76) / 6.02$$

Total Harmonic Distortion

Total harmonic distortion (THD) is the ratio of the RMS sum of the first five harmonics of the input signal to the fundamental itself. This is expressed as:

$$\text{THD} = 20 \times \log \left(\sqrt{\frac{V_2^2 + V_3^2 + V_4^2 + V_5^2}{V_1^2}} \right)$$

where V_1 is the fundamental amplitude, and V_2 through V_5 are the amplitudes of the 2nd- through 5th-order harmonics, respectively.

Spurious-Free Dynamic Range

Spurious-free dynamic range (SFDR) is the ratio of RMS amplitude of the fundamental (maximum signal component) to the RMS value of the next-largest distortion component.


Chip Information

TRANSISTOR COUNT: 28,629

$\pm 15kV$ ESD-Protected Touch-Screen Controllers Include DAC and Keypad Controller

Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to www.maxim-ic.com/packages.)

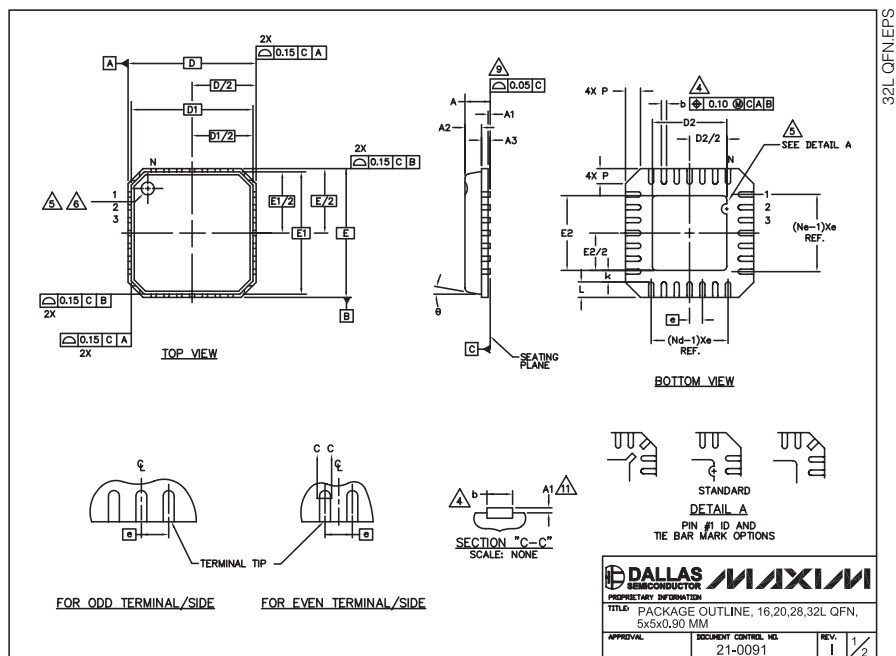

| COMMON DIMENSIONS | | | | | | | | | | | | |
|-------------------|----------|------|------|----------|------|------|----------|------|------|----------|------|------|
| PKG | 16L 5x5 | | | 20L 5x5 | | | 28L 5x5 | | | 32L 5x5 | | |
| SYMBOL | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. |
| A | 0.80 | 0.90 | 1.00 | 0.80 | 0.90 | 1.00 | 0.80 | 0.90 | 1.00 | 0.80 | 0.90 | 1.00 |
| A1 | 0.00 | 0.01 | 0.05 | 0.00 | 0.01 | 0.05 | 0.00 | 0.01 | 0.05 | 0.00 | 0.01 | 0.05 |
| A2 | 0.00 | 0.65 | 1.00 | 0.00 | 0.65 | 1.00 | 0.00 | 0.65 | 1.00 | 0.00 | 0.65 | 1.00 |
| A3 | 0.20 REF | | | 0.20 REF | | | 0.20 REF | | | 0.20 REF | | |
| b | 0.28 | 0.33 | 0.40 | 0.23 | 0.28 | 0.35 | 0.18 | 0.23 | 0.30 | 0.18 | 0.23 | 0.30 |
| D | 4.90 | 5.00 | 5.10 | 4.90 | 5.00 | 5.10 | 4.90 | 5.00 | 5.10 | 4.90 | 5.00 | 5.10 |
| D1 | 4.75 BSC | | | 4.75 BSC | | | 4.75 BSC | | | 4.75 BSC | | |
| E | 4.90 | 5.00 | 5.10 | 4.90 | 5.00 | 5.10 | 4.90 | 5.00 | 5.10 | 4.90 | 5.00 | 5.10 |
| E1 | 4.75 BSC | | | 4.75 BSC | | | 4.75 BSC | | | 4.75 BSC | | |
| e | 0.80 BSC | | | 0.65 BSC | | | 0.50 BSC | | | 0.50 BSC | | |
| k | 0.25 | — | — | 0.25 | — | — | 0.25 | — | — | 0.25 | — | — |
| L | 0.35 | 0.55 | 0.75 | 0.35 | 0.55 | 0.75 | 0.35 | 0.55 | 0.75 | 0.30 | 0.40 | 0.50 |
| N | 16 | | | 20 | | | 28 | | | 32 | | |
| ND | 4 | | | 5 | | | 7 | | | 8 | | |
| NE | 4 | | | 5 | | | 7 | | | 8 | | |
| P | 0.00 | 0.42 | 0.60 | 0.00 | 0.42 | 0.60 | 0.00 | 0.42 | 0.60 | 0.00 | 0.42 | 0.60 |
| g | 0" | 0" | 12" | 0" | 0" | 12" | 0" | 0" | 12" | 0" | 0" | 12" |

NOTES:

1. DIE THICKNESS ALLOWABLE IS 0.305mm MAXIMUM (.012 INCHES MAXIMUM)
2. DIMENSIONING & TOLERANCES CONFORM TO ASME Y14.5M - 1994.
3. N IS THE NUMBER OF TERMINALS.
4. ND IS THE NUMBER OF TERMINALS IN X-DIRECTION & Ne IS THE NUMBER OF TERMINALS IN Y-DIRECTION.
5. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.20 AND 0.25mm FROM TERMINAL TIP.
6. THE PIN #1 IDENTIFIER MUST BE EXISTED ON THE TOP SURFACE OF THE PACKAGE BY USING INDENTATION MARK OR INK/LASER MARKED. DETAILS OF PIN #1 IDENTIFIER IS OPTIONAL, BUT MUST BE LOCATED WITHIN ZONE INDICATED.
7. EXACT SHAPE AND SIZE OF THIS FEATURE IS OPTIONAL.
8. ALL DIMENSIONS ARE IN MILLIMETERS.
9. PACKAGE WARPAGE MAX 0.05mm.
10. APPLIED FOR EXPOSED PAD AND TERMINALS. EXCLUDE EMBEDDED PART OF EXPOSED PAD FROM MEASURING.
11. MEETS JEDEC MO220; EXCEPT DIMENSION "b".
12. APPLIED FOR EXPOSED PAD AND TERMINALS. EXCLUDE EMBEDDING PART OF EXPOSED PAD FROM MEASURING.
13. THIS PACKAGE OUTLINE APPLIES TO ANVIL SINGULATION (STEPPED SIDES).

EXPOSED PAD VARIATIONS

| PKG CODES | B2 | | | E2 | | |
|-----------|------|------|------|------|------|------|
| | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. |
| G1655-3 | 2.95 | 3.10 | 3.25 | 2.95 | 3.10 | 3.25 |
| G2055-1 | 2.55 | 2.70 | 2.85 | 2.55 | 2.70 | 2.85 |
| G2055-2 | 2.95 | 3.10 | 3.25 | 2.95 | 3.10 | 3.25 |
| G2855-1 | 2.55 | 2.70 | 2.85 | 2.55 | 2.70 | 2.85 |
| G2855-2 | 2.95 | 3.10 | 3.25 | 2.95 | 3.10 | 3.25 |
| G3255-1 | 2.95 | 3.10 | 3.25 | 2.95 | 3.10 | 3.25 |

DALLAS SEMICONDUCTOR

MAXIM

PROPRIETARY INFORMATION

TITLE PACKAGE OUTLINE, 16,20,28,32L QFN, 5x5x0,90 MM

APPROVAL

DOCUMENT CONTROL NO. 21-0091

REV. 1/2

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

44 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com