

XC2165 Series



ICs for use with low voltage Crystal Oscillators

Preliminary

- ◆ Low Voltage Operation, CMOS Low Power Consumption
 - C2xA series : 1.5V (MIN.) ~ 3.6V (MAX.)
 - C2xB series : 1.8V (MIN.) ~ 3.6V (MAX.)
- ◆ Oscillation Frequency Range
 - 8MHz ~ 70MHz C2xA: Fundamental Oscillation
 - 16MHz ~ 120MHz C2xB: Fundamental Oscillation
- ◆ 3-State Output
- ◆ Built-in Capacitors Cg, Cd
- ◆ Built-in Feedback Resistor
- ◆ Chip form
- ◆ Mini Mold SOT-26 Package

APPLICATIONS

- Crystal oscillation modules
- Micro computers, DSP clocks
- Communication equipment
- Various system clocks

GENERAL DESCRIPTION

The XC2165 series are CMOS ICs operates from supply voltage range from 1.5V to 3.6V with built-in crystal oscillator and divider circuits.

Output is selectable from any one of the following values for f₀ : f₀/1, f₀/2, f₀/4, f₀/8.

With oscillation capacitors and a feedback resistor built-in, it is possible to configure a stable fundamental oscillator using only an external crystal.

In stand-by mode, oscillation stops completely and output pin Q0 becomes in the state of high impedance.


The XC2165 series are integrated into SOT-26 packages.

The series is also available in chip form.

FEATURES

- Oscillation Frequency** : C2xA series
8MHz ~ 70MHz (Fundamental)
: C2xB series
16MHz ~ 120MHz (Fundamental)
- Divider Ratio** : Selectable from f₀/1, f₀/2, f₀/4, f₀/8
- Output** : 3-State
- Operating Voltage Range** : 1.5V ~ 3.6V
(C21B series: 1.8V ~ 3.6V)
- Low Current Consumption**: Stand-by function included
30 μA (MAX.) when stand-by
- Chip Form (size)** : 800 × 1200 μm
- Ultra Small Package** : SOT-26 mini mold

PIN CONFIGURATION




PIN ASSIGNMENT

PIN NUMBER	PIN NAME	FUNCTION
1	/ INH	Stand-by Control *
2	XT	Crystal Oscillator Connection (Input)
3	VSS	Ground
4	Q0	Clock Output
5	VDD	Power Supply
6	/XT	Crystal Oscillator Connection (Output)

* Pull-up resistor is built-in to the stand-by control pin.

XC2165 Series

■ BLOCK DIAGRAM

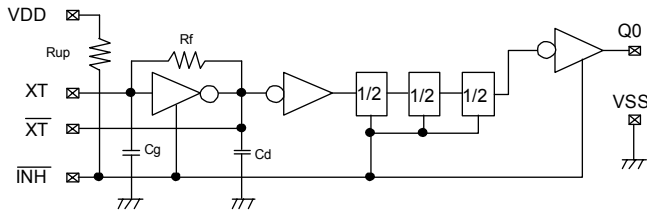

■ / INH, Q0 PIN FUNCTION

/ INH	Q0
'H' or Open	Clock Output
'L'	High Impedance

■ PRODUCT CLASSIFICATION


● Ordering Information

XC2165 ①②③④⑤⑥


DESIGNATOR	DESCRIPTION	SYMBOL	DESCRIPTION
①	Duty Level	C	: CMOS
②	Fixed Number	2	: -
③	Divider Ratio	1	: f0/1
		2	: f0/2
		4	: f0/4
		8	: f0/8
④	Oscillation Frequency	A	: 8MHz ~ 70MHz
		B	: 16MHz ~ 120MHz
⑤	Chip Form & Package Type	C	: Chip form
		M	: SOT-26 package
⑥	Device Orientation	T	: Chip tray
		R	: Embossed tape, Standard feed
		L	: Embossed tape, Reverse feed
		W	: Wafer

■ PACKAGING INFORMATION

● SOT-26

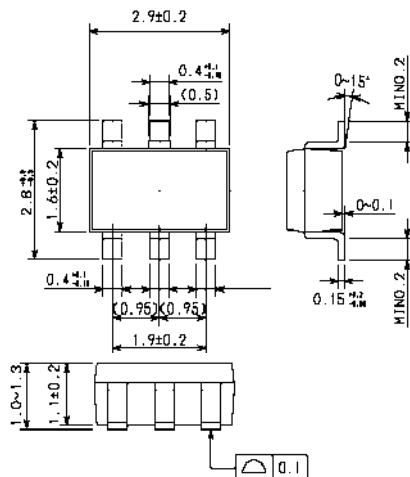

■ PAD LAYOUT




Size (Chip) : 800 × 1200 μm
 Thickness (Chip) : 200 ± 20 μm
 Backside (Chip) : GND level
 Aperture (Pad) : 90 × 90 μm

■ PAD DIMENSION

PIN NUMBER	PIN NAME	FUNCTION	PAD DIMENSIONS	
			X	Y
1	/ INH	Stand-by Control	- 236	- 436
2	XT	Crystal Oscillation Connection (Input)	- 79	- 436
3	/ XT	Crystal Oscillation Connection (Output)	79	- 436
4	VSS	Ground	236	- 436
5	Q0	Clock Output	236	436
6	(NC)	No Connection	- 78	436
7	VDD	Power Supply	- 236	436

*① Pull-up resistor is built-in to the stand-by control pin.

MARKING RULE



SOT-26 (TOP VIEW)

- ① Represents product series (Fixed marking)

MARK	PRODUCT SERIES
5	XC2165 series

- ② Represents oscillation frequency

MARK	OSCILLATION FREQUENCY
A	C2xA: 8MHz ~ 70MHz (Fundamental)
B	C2xB: 16MHz ~ 120MHz (Fundamental)

- ③ Represents divider ratio

MARK	DEVIDER RATIO	MARK	DEVIDER RATIO
A	f0/1	B	f0/2
C	f0/4	D	f0/8

- ④ Represents assembly lot number
(based on internal standards)

ABSOLUTE MAXIMUM RATINGS

Ta=25°C

PARAMETER	SYMBOL	RATINGS	UNITS
Supply Voltage	VDD	Vss – 0.3 to Vss + 7.0	V
/ INH Pin Voltage	VINH	Vss – 0.3 to VDD + 0.3	V
Q0 Pin Voltage	VQ0	Vss – 0.3 to VDD + 0.3	V
Q0 Output Current	IQ0	± 50	mA
Power Dissipation	Pd	150 *	mW
Operating Temperature Range	Topr	- 40 to + 85	°C
Storage Temperature Range	Tstg	- 65 to + 150 (chip form)	°C
		- 55 to + 125 (SOT-26)	

* SOT-26 Package: When implemented on a glass epoxy PCB.

XC2165 Series

■ ELECTRICAL CHARACTERISTICS

XC2165C2xAxx

1.8V Operation (Unless otherwise stated, $V_{DD} = 1.8V$, $f_0=70MHz$, No Load, $T_a = -40^{\circ}C \sim +85^{\circ}C$)

PARAMETER	SYMBOL	FUNCTION	MIN.	TYP.	MAX.	UNIT	
Operating Voltage	V_{DD}		1.5	1.8	3.6	V	
Crystal Oscillation Frequency	F_{osc}		8	-	70	MHz	
'H' Level Input Voltage	V_{IH}	/INH pin	$0.7V_{DD}$	-	-	V	
'L' Level Input Voltage	V_{IL}	/INH pin	-	-	$0.3V_{DD}$	V	
'H' Level Output Voltage	V_{OH}	Q0 pin, $V_{DD}=1.5V$, $I_{OH} = -2.0mA$	1.0	1.1	-	V	
'L' Level Output Voltage	V_{OL}	Q0 pin, $V_{DD}=1.5V$, $I_{OL} = 2.0mA$	-	0.3	0.4	V	
Supply Current 1	I_{DD1}	/INH =Open, $f_0=70MHz$, $C_L=15pF$	XC2165C21Axx	-	5.0	10.0	mA
			XC2165C22Axx	-	3.5	7.0	
			XC2165C24Axx	-	3.0	6.0	
			XC2165C28Axx	-	2.5	6.0	
Supply Current 2	I_{DD2}	/INH = 'L', $f_0 = 70MHz$, $C_L=15pF$	-	15	30	μA	
Input Pull-Up Resistance 1	R_{up1}	/INH = 'L'	0.8	2.0	6.0	$M\Omega$	
Input Pull-Up Resistance 2	R_{up2}	/INH = $0.7V_{DD}$	20	50	150	$k\Omega$	
Internal Oscillation Capacity (*)	C_g	(*)	-	10	-	pF	
	C_d	(*)	-	10	-	pF	
Internal Oscillation Feedback Resistance	R_f		1.2	3.0	5.5	$M\Omega$	
Output Off Leak Current	I_{oz}	$V_{DD}=3.6V$, /INH = 'L'	-	-	1.0	μA	

(*) Designed value

■ SWITCHING CHARACTERISTICS

XC2165C2xAxx

1.8V Operation (Unless otherwise stated, $V_{DD} = 1.8V$, $f_0=70MHz$, $C_L=15pF$, $T_a = -40^{\circ}C \sim +85^{\circ}C$)

PARAMETER	SYMBOL	FUNCTION	MIN.	TYP.	MAX.	UNIT
Output Rise Time (*)	T_r	$V_{DD}=1.8V$, $C_L=15pF$ (10% to 90%)	-	-	6.5	ns
Output Fall Time (*)	T_f	$V_{DD}=1.8V$, $C_L=15pF$ (10% to 90%)	-	-	6.5	ns
Output Duty Cycle	DUTY	$C_L=15pF @ 0.5V_{DD}$	40	-	60	%
Oscillation Start Time (*)	T_{osc_on}	$f_0=8MHz$	-	-	4.0	ms

(*) Designed value

■ ELECTRICAL CHARACTERISTICS (Continued)

XC2165C2xBxx

 2.5V Operation (Unless otherwise stated, $V_{DD} = 2.5V$, $f_0=120MHz$, No Load, $T_a = -40^{\circ}C \sim +85^{\circ}C$)

PARAMETER	SYMBOL	FUNCTION	MIN.	TYP.	MAX.	UNIT	
Operating Voltage	V_{DD}		1.8	2.5	3.6	V	
Crystal Oscillation Frequency	F_{osc}		16	-	120	MHz	
'H' Level Input Voltage	V_{IH}	/INH pin	$0.7V_{DD}$	-	-	V	
'L' Level Input Voltage	V_{IL}	/INH pin	-	-	$0.3V_{DD}$	V	
'H' Level Output Voltage	V_{OH}	Q0 pin, $V_{DD}=1.8V$, $I_{OH} = -2.0mA$	1.3	1.4	-	V	
'L' Level Output Voltage	V_{OL}	Q0 pin, $V_{DD}=1.8V$, $I_{OL} = 2.0mA$	-	0.3	0.4	V	
Supply Current 1	I_{DD1}	/INH =Open, $f_0=120MHz$, $C_L=5pF$	XC2165C21Bxx	-	10.0	20.0	mA
			XC2165C22Bxx	-	T.B.D.	T.B.D.	
			XC2165C24Bxx	-	T.B.D.	T.B.D.	
			XC2165C28Bxx	-	T.B.D.	T.B.D.	
Supply Current 2	I_{DD2}	/INH = 'L', $f_0 = 120MHz$, $C_L=5pF$	-	15.0	30.0	μA	
Input Pull-Up Resistance 1	R_{up1}	/INH = 'L'	0.8	2.0	6.0	$M\Omega$	
Input Pull-Up Resistance 2	R_{up2}	/INH = $0.7V_{DD}$	20	50	150	$k\Omega$	
Internal Oscillation Capacity (*)	C_g	(*)	-	10	-	pF	
	C_d	(*)	v	10	-	pF	
Internal Oscillation Feedback Resistance	R_f		1.2	3.0	5.5	$M\Omega$	
Output Off Leak Current	I_{oz}	$V_{DD}=3.6V$, /INH = 'L'	-	-	1.0	μA	

(*) Designed value

T.B.D.: To be determined

■ SWITCHING CHARACTERISTICS (Continued)

XC2165C2xBxx


 2.5V Operation (Unless otherwise stated, $V_{DD} = 2.5V$, $f_0=120MHz$, $C_L=5pF$, $T_a = -40^{\circ}C \sim +85^{\circ}C$)

PARAMETER	SYMBOL	FUNCTION	MIN.	TYP.	MAX.	UNIT
Output Rise Time (*)	T_r	$V_{DD}=2.5V$, $C_L=5pF$ (10% to 90%)	-	-	4.0	ns
Output Fall Time (*)	T_f	$V_{DD}=2.5V$, $C_L=5pF$ (10% to 90%)	-	-	4.0	ns
Output Duty Cycle	DUTY	$C_L=5pF$ @ $0.5V_{DD}$	40	-	60	%
Oscillation Start Time (*)	T_{osc_on}	$f_0=16MHz$	-	-	3.0	ms


(*) Designed value

SWITCHING CHARACTERISTICS MEASUREMENT WAVEFORMS

(1) Output Rise Time: T_r / Output Fall Time: T_f

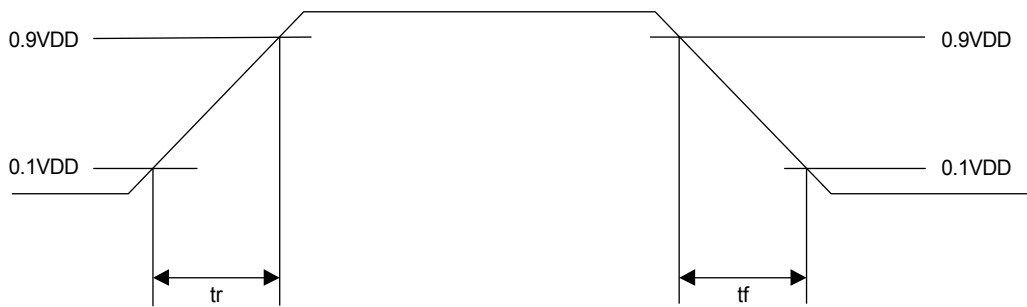

(2) Duty Cycle

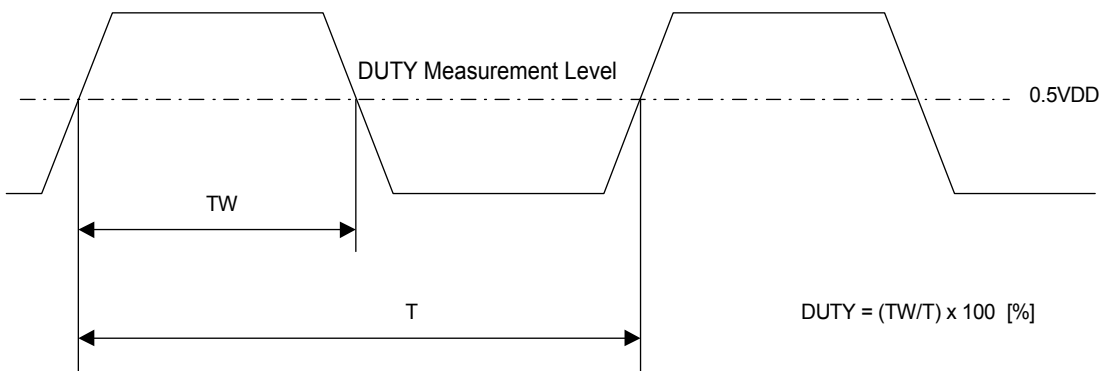

(3) Oscillation Start Time: T_{osc_on} / Oscillation Stop Time: T_{osc_off}

