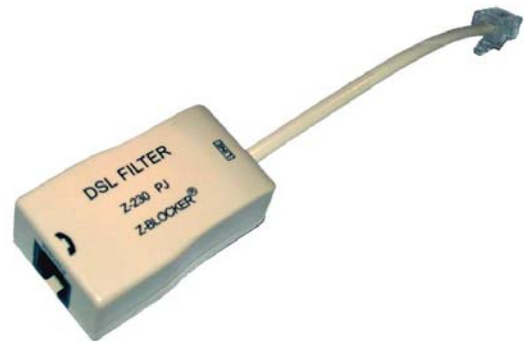


Description

The Z-230PJ is a small, in-line customer premises equipment (CPE) filter designed to expedite the service delivery and improve the performance of digital subscriber line (DSL) and home phoneline network (HPN) services over plain old telephone service (POTS). The Z-230PJ filters all telephones, facsimile (fax) machines, answering machines, and other telephone equipment. Its filter design electronically isolates the high-speed DSL and HPN data streams from the voice-band POTS to provide premium voice quality and optimal DSL and HPN data rates.

Features

- Isolate telephone equipment impedances from the xDSL and HPN systems
- Attenuate xDSL & HPN signals to phone equipment to prevent conversion to voice band signals
- Attenuate HPN signals to unbalanced phone equipment to prevent radiation into electronic equipment
- Attenuate radio signals picked up by unbalanced telephone acting as an antenna from effecting DSL or HPN receivers
- Minimize voice band interference --- transmission, signaling and supervision
- Compatible with all major xDSL standards including ADSL Full Rate (ITU-T G.992.1), ADSL G.Lite (ITU-T G.992.2), ADSL2 (ITU-T G.992.3 and .4), ADSL2+ (ITU-T G.992.5 in analog mode), ADSL2++, VDSL (ITU-T G.993.1), VDSL2; also V.90 and Metallic Loop Testing compatible
- FCC CFR 47 Part 68; UL 1950, and CSA 22.2 #950-5 compliant and listed
- MII YD/T 1055-2000 compliant (Ministry of Information Industry, China)
- CE certified

**Applications**

The DSL user installs the Z-230PJ in-line filter into each telephone line jack in the subscribers' premises that contains voice-band equipment devices, including corded/cordless telephones, answering machines, fax machines, 56Kb/s and lower rate modems, automatic dialers, and recorder connectors. The Z-230PJ may also be used to isolate a digital cable or satellite television set-top box.

The Z-230PJ in-line filter is one of many filters and splitters manufactured by Excelsus for subscriber-installed digital services within homes, offices, and hotels. Excelsus is the number one selling brand of DSL filters worldwide.

Z-BLOCKER[®] Z-230PJ In-Line Filter

Z-BLOCKER[®] Z-230PJ Filter Specifications		
Line side differential input blocking impedance		
At 20 kHz, and from 5 MHz to 10 MHz		>2k
At 30 kHz		>3k
From 10 MHz to 400 MHz		N/A
1 kHz insertion loss between 600 Ohm resistive		
Single filter		<0.4
With 5 filters		<0.6
1 kHz/2.8 kHz slope between 600 Ohm resistive		
Single filter		<0.1
With 5 filters		<1.1
DC resistance in Ohms		
Tip to Tip, and Ring to Ring		<12
Tip to Ring		>10M
Longitudinal Balance per IEEE method		
From 200 - 1 kHz		>58dB
From 1 kHz - 3 kHz		>53dB
Common mode rejection		
40 kHz and 1.1 MHz		>45dB
Low pass roll off (slope) between 600 Ohm and ADSL Transmission Unit - Remote		
		>26dB
Inter-Modulation Distortion First and Second order products		
		>60dB
Envelope Delay 300 Hz - 2800 Hz		
		<100µs
600 Ohm Return Loss into phone side with 600 Ohm line termination with ATU-R		
Single filter	SRL Low	>30dB
	ERL	>14dB
	SRL High	>17dB
+2 bridged filters	SRL Low	>36dB
	ERL	>23dB
	SRL High	>13dB
+4 bridged filters	SRL Low	>26dB
	ERL	>15dB
	SRL High	>8dB
Complex* Return Loss with ATU-R		
Single filter	SRL Low	>27dB
Single filter	ERL	>14dB
Single filter	SRL High	>6dB
+ 2 bridged filters	SRL Low	>19dB
	ERL	>14dB
	SRL High	>3dB
+ 4 bridged filters	SRL Low	>15dB
	ERL	>7dB
	SRL High	>2dB
* 1330 Ohms in parallel with (100nfd in series with 348 Ohms)		
DC Loop Current – Meets specifications between 20 and 100 milliamps DC		
Isolates dial pulses and on-hook/off-hook transitions from the digital subscriber line		
CE certified		
Dimensions: Length 2.0in (51.3mm), Width 1.2in (30.5mm), Height 0.75in (19.0mm), Cord Length = 4.0in (102mm)		



12220 World Trade Drive, San Diego, CA 92128 USA
Toll-free 800-457-0967 • Direct 760-476-1511 • Fax 858-385-8003
www.excelsus-tech.com • sales@excelsus-tech.com