

ZXRE1004

SOT23 MICROPOWER (4µA) 1.22V VOLTAGE REFERENCE

DESCRIPTION

The ZXRE1004 is a 1.22 volt bandgap reference circuit designed for ultra low current operation, typically 4µA. The device is available in a SOT23 surface mount package offering the ultimate in space and power saving. These features make the ZXRE1004 particularly suitable for portable and battery powered applications.

SOT23 tolerance selection is available to 0.5% for precision applications. Excellent performance is

maintained over the 8µA to 20mA operating current range with a typical temperature coefficient of only 20ppm/°C. The device has been designed to be highly tolerant of capacitive loads so maintaining excellent stability.

As well as the SOT23, the ZXRE1004 can offer a pin for pin compatible alternative to the REF1004, LT1004 and LM185/385 series of voltage references with SO8 and E-Line (TO92 style) equivalents .


FEATURES

- High performance alternative to REF1004, LT1004 and LM185/385 references
- 4µA typical knee current
- Small outline SOT23 package
- SO8 and E-Line alternatives available
- 20ppm/°C typical temperature coefficient
- Unconditionally stable
- 0.5%, 1%, 2% and 3% tolerance
- Contact Zetex marketing for availability of tighter tolerance devices


APPLICATIONS

- Battery powered equipment
- Precision power supplies
- Portable instrumentation
- Portable communications devices
- Notebook and palmtop computers
- Data acquisition systems
- A/D and D/A converters
- Test equipment

SCHEMATIC DIAGRAM

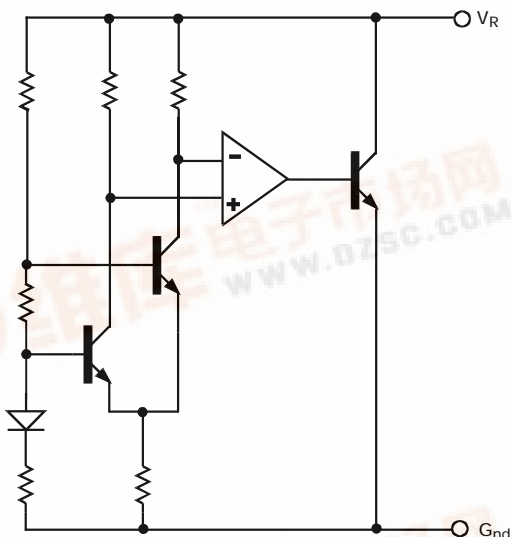

APPLICATIONS CIRCUIT

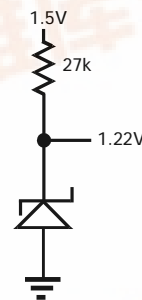

Ultra low quiescent reference from a 1.5V battery source.



ZXRE1004

ABSOLUTE MAXIMUM RATINGS

| | |
|------------------------|--------------|
| Reverse Current | 30mA |
| Forward Current | 10mA |
| Operating temperature. | -40 to 85°C |
| Storage temperature. | -55 to 125°C |

| | |
|--|-------|
| Power Dissipation (T _{amb} =25°C) | |
| SOT23 | 330mW |
| SO8 | 625mW |
| E-Line | 500mW |

ELECTRICAL CHARACTERISTICS


TEST CONDITIONS (Unless otherwise stated) T_{amb}=25°C

| SYMBOL | PARAMETER | CONDITIONS | LIMITS | | | TOL. % | UNITS |
|---------------------------------|---|--|----------------------------------|------------------------------|----------------------------------|----------------------|----------|
| | | | MIN | TYP | MAX | | |
| V _R | Reverse Breakdown Voltage | I _R =100μA | 1.214 1.208 1.196 1.183 | 1.22 1.22 1.22 1.22 | 1.226 1.232 1.244 1.257 | 0.5 ‡ 1 2 3 | V |
| I _{MIN} | Minimum Knee Current | | | 4 | 8 | | μA |
| I _R | Recommended Operating Current Range | | 0.008 | | 20 | | mA |
| T _C † | Average Reverse Breakdown Voltage Temperature Coefficient | I _{R(min)} to I _{R(max)} | | 20 | 75 | | ppm/°C |
| $\frac{\Delta V_R}{\Delta I_R}$ | Reverse Breakdown Voltage change with Current | I _R =8μA to 1mA I _R =1mA to 20mA | | | 1 10 | | mV mV |
| Z _R | Reverse Dynamic Impedance | I _R = 1mA f = 100Hz I _{AC} =0.1 I _R | | 0.2 | 0.6 | | Ω |
| E _N | Wideband Noise Voltage | I _R =8μA to 100μA f=10Hz to 10kHz | | 60 | | | μV(rms) |

$$\dagger T_C = \frac{(V_{R(max)} - V_{R(min)}) \times 1000000}{V_R \times (T_{(max)} - T_{(min)})}$$

Note: V_{R(max)} - V_{R(min)} is the maximum deviation in reference voltage measured over the full operating temperature range.

‡ Note: 0.5% SOT23 only

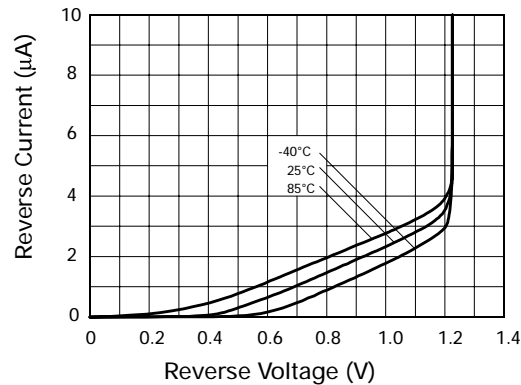


Reverse Characteristics

ISSUE 2 - JUNE 1999



ZXRE1004

TYPICAL CHARACTERISTICS

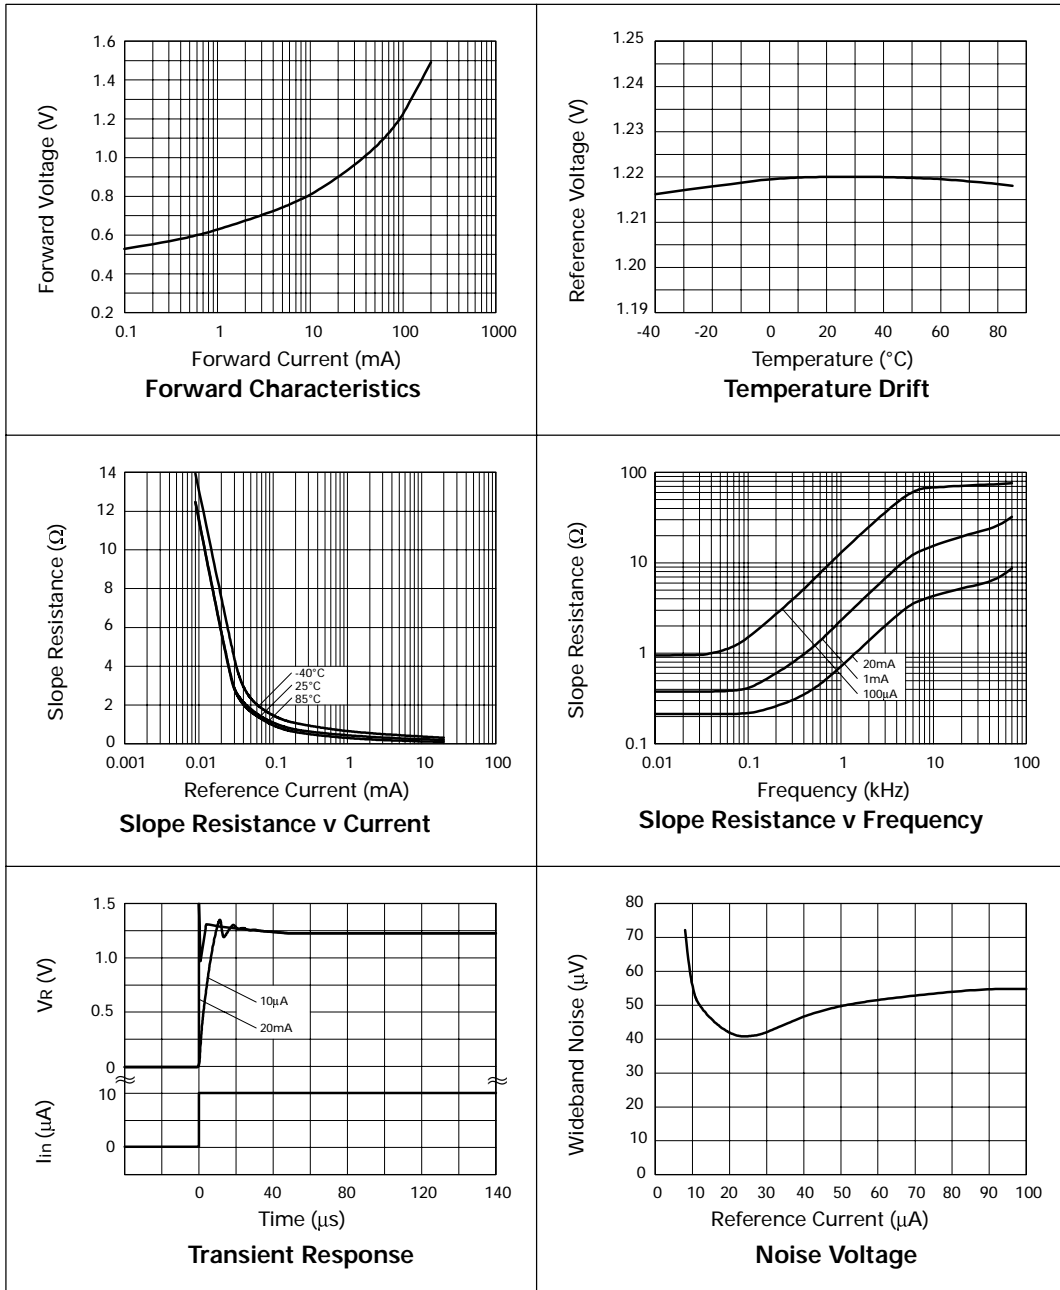

ZXRE1004

Ordering Information




| Device | TOL% | Package | Partmarking |
|---------------|------|---------|-------------|
| ZXRE1004CF | 0.5 | SOT23 | 10D |
| ZXRE1004DF | 1 | SOT23 | 10C |
| ZXRE1004EF | 2 | SOT23 | 10B |
| ZXRE1004FF | 3 | SOT23 | 10A |
| ZXRE1004DN8 † | 1 | SO8 | ZXRE1004D |
| ZXRE1004EN8 † | 2 | SO8 | ZXRE1004E |
| ZXRE1004FN8 † | 3 | SO8 | ZXRE1004F |
| ZXRE1004DR † | 1 | E-Line | ZXRE1004D |
| ZXRE1004ER † | 2 | E-Line | ZXRE1004E |
| ZXRE1004FR † | 3 | E-Line | ZXRE1004F |

†Contact Zetex marketing for availability of these package options

NOTE:

for tape and reel options add suffix TA to the part number
eg ZXRE1004DFTA

Connection Diagrams

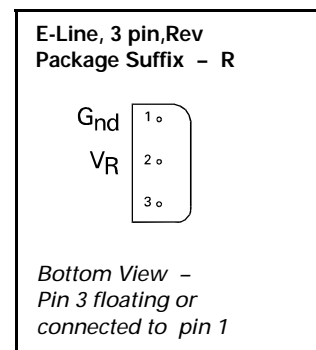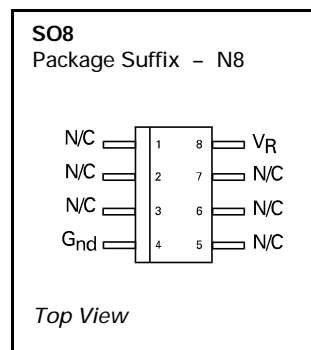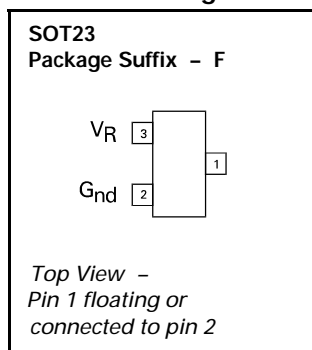

Zetex plc.
Fields New Road, Chadderton, Oldham, OL9-8NP, United Kingdom.
Telephone: (44)161 622 4422 (Sales), (44)161 622 4444 (General Enquiries)
Fax: (44)161 622 4420

Zetex GmbH
Streitfeldstraße 19
D-81673 München
Germany
Telefon: (49) 89 45 49 49 0
Fax: (49) 89 45 49 49 49

Zetex Inc.
47 Mall Drive, Unit 4
Commack NY 11725
USA
Telephone: (516) 543-7100
Fax: (516) 864-7630

Zetex (Asia) Ltd.
3510 Metroplaza, Tower 2
Hing Fong Road,
Kwai Fong, Hong Kong
Telephone: (852) 26100 611
Fax: (852) 24250 494

These are supported by
agents and distributors in
major countries world-wide
©Zetex plc 1999

Internet: <http://www.zetex.com>

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

ISSUE 2 - JUNE 1999