

查询"CTSLF1045TE-681M"供应商

CTSLF1045 Series

From 10 μH to 1500 μH 

CHARACTERISTICS

Description: SMD (shielded) power inductor**Applications:** For power source circuits, low profile type DC to DC converters, DC to AC inverters etc.**Operating Temperature:** -20°C to +85°C**Inductance Tolerance:** $\pm 20\%$ **Testing:** Inductance is tested on an HP4284A at 1.0 kHz, 0.5V**IDC Current:** Value obtained when DC current flows and the initial value of inductance has fallen by 10%**Itemp Current:** Value obtained when current flows and the temperature has risen to 30°C**Packaging:** Tape & Reel**Marking:** Parts are marked with inductance code**Miscellaneous:** Magnetically shielded. **RoHS Compliant available.****Additional Information:** Additional electrical & physical information available upon request**Samples available. See website for ordering information.**


SPECIFICATIONS

Parts are available in $\pm 20\%$ tolerance only.
CTSLF1045TE Please specify "F" for RoHS compliant.

Part Number	Inductance (μH)	L Test Freq. (kHz)	DCR $\pm 20\%$ (Ω)	Rated DC (A)	Itemp Max. (A)
CTSLF1045T_-100M	10	1.0	0.0364	3.0	2.5
CTSLF1045T_-150M	15	1.0	0.0472	2.4	2.2
CTSLF1045T_-220M	22	1.0	0.0591	2.1	1.9
CTSLF1045T_-330M	33	1.0	0.0815	1.6	1.7
CTSLF1045T_-470M	47	1.0	0.1	1.4	1.5
CTSLF1045T_-680M	68	1.0	0.14	1.2	1.3
CTSLF1045T_-101M	100	1.0	0.2	1.0	1.1
CTSLF1045T_-151M	150	1.0	0.35	0.79	0.81
CTSLF1045T_-221M	220	1.0	0.47	0.65	0.7
CTSLF1045T_-331M	330	1.0	0.68	0.54	0.58
CTSLF1045T_-471M	470	1.0	1.03	0.47	0.47
CTSLF1045T_-681M	680	1.0	1.6	0.38	0.38
CTSLF1045T_-102M	1000	1.0	2.8	0.32	0.29
CTSLF1045T_-152M	1500	1.0	3.4	0.22	0.26


PHYSICAL DIMENSIONS

Size	A	B	C	D Typ.	E	F	G
mm	10.1 $\pm$ 0.3	10.1 $\pm$ 0.3	4.5 $\pm$ 0.3	0.15	3 $\pm$ 0.1	6 $\pm$ 0.2	2 $\pm$ 0.15
inches	0.40 $\pm$ 0.012	0.40 $\pm$ 0.012	0.18 $\pm$ 0.012	0.006	0.12 $\pm$ 0.004	0.24 $\pm$ 0.008	0.08 $\pm$ 0.006

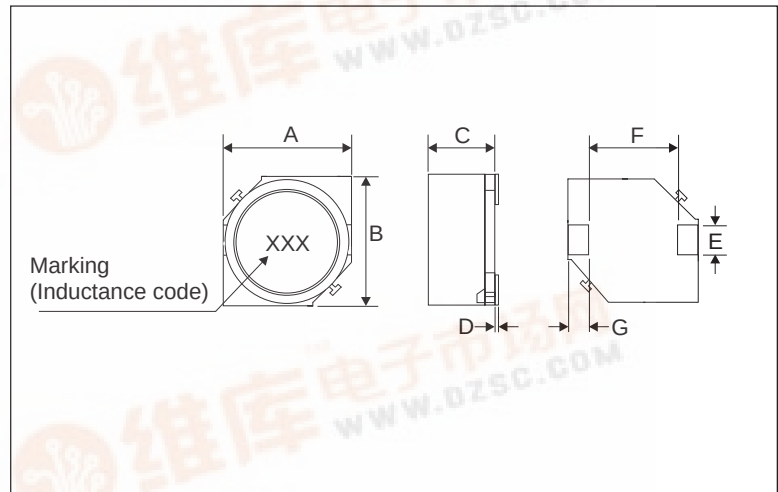

PAD LAYOUT

Unit: mm



08.29.05

Manufacturer of Inductors, Chokes, Coils, Beads, Transformers & Toroids

800-684-5322 Inside US

949-453-1811 Outside US

Copyright © 2005 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice

