
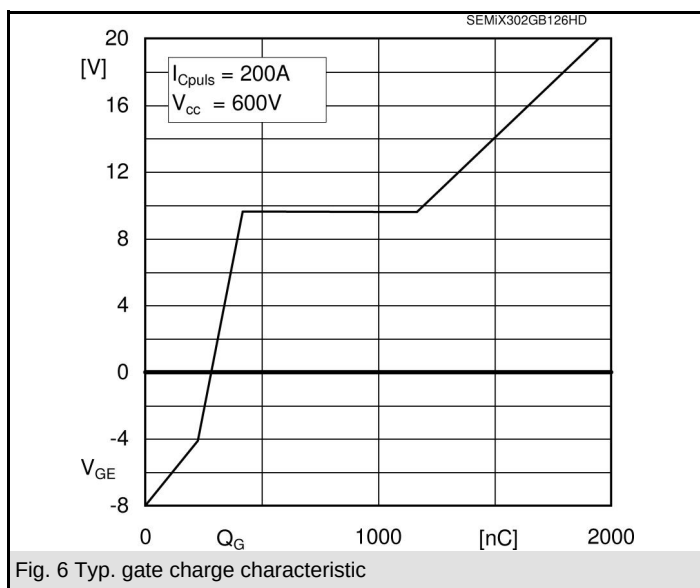
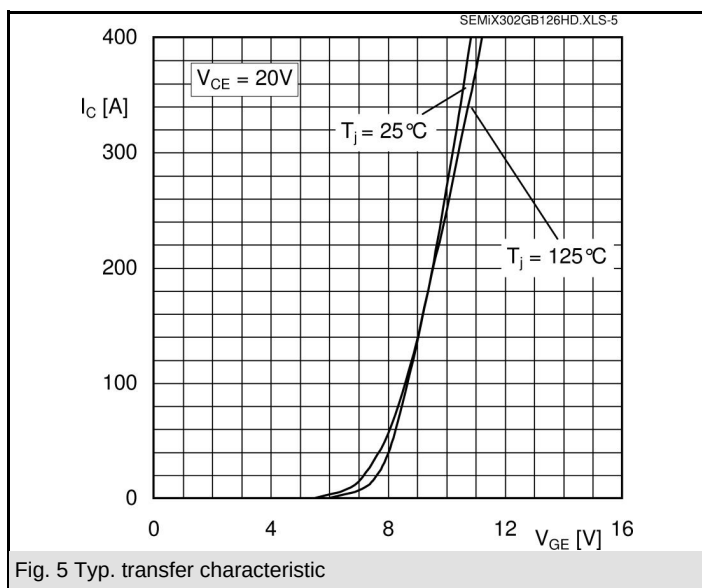
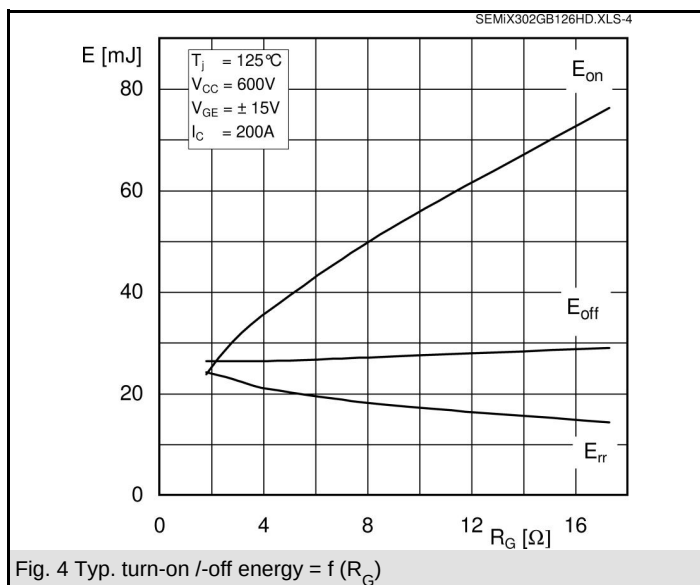
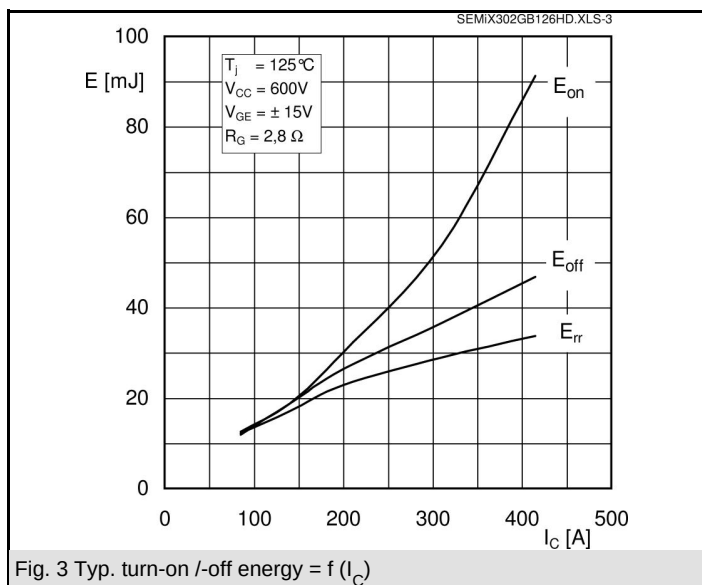
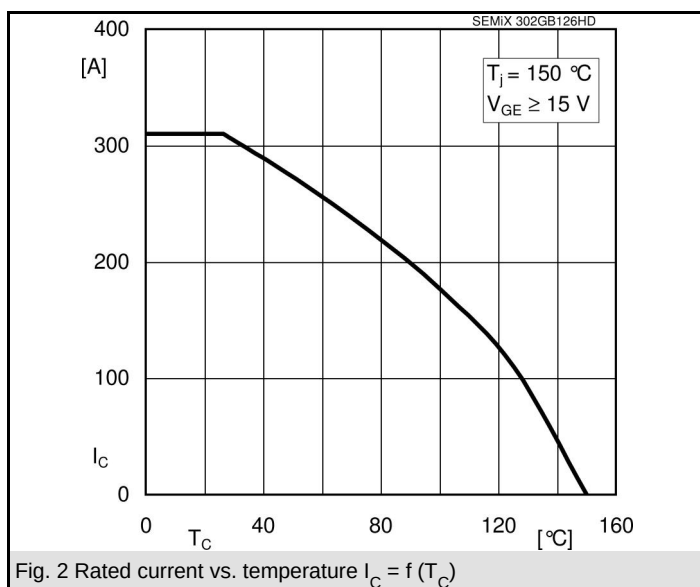


查询"SEMIX302GB126HD_07"供应商

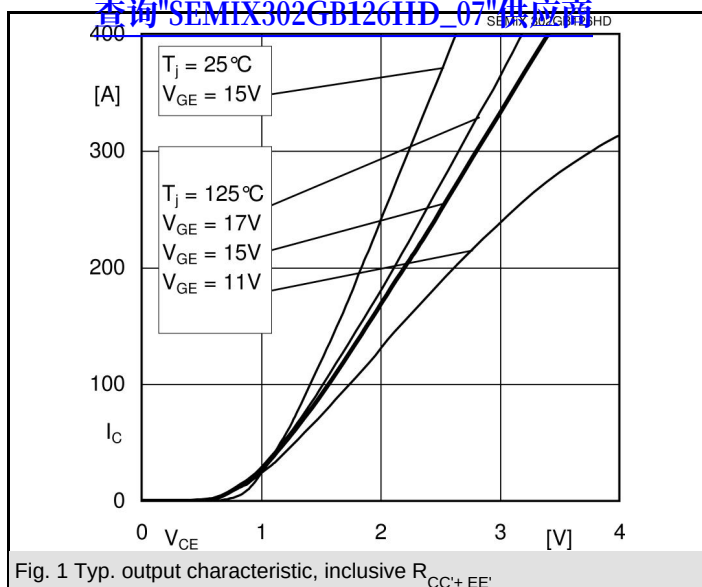

查询"SEMIX302GB126HD-07"供应商

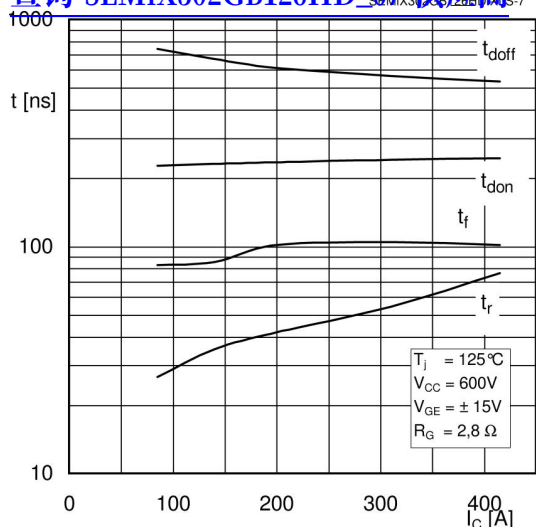


Fig. 7 Typ. switching times vs. I_C

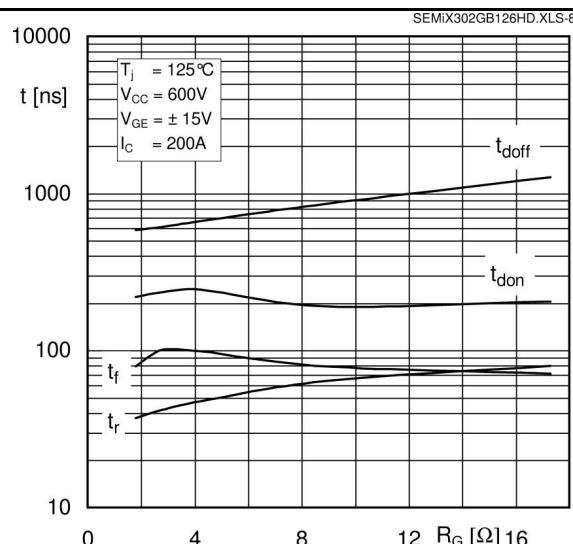


Fig. 8 Typ. switching times vs. gate resistor R_G

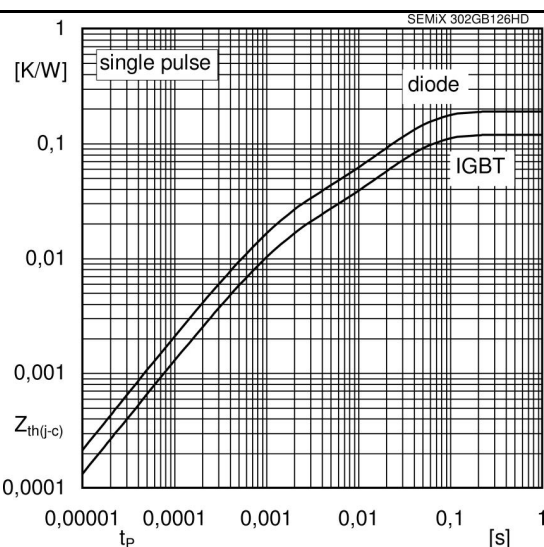


Fig. 9 Typ. transient thermal impedance

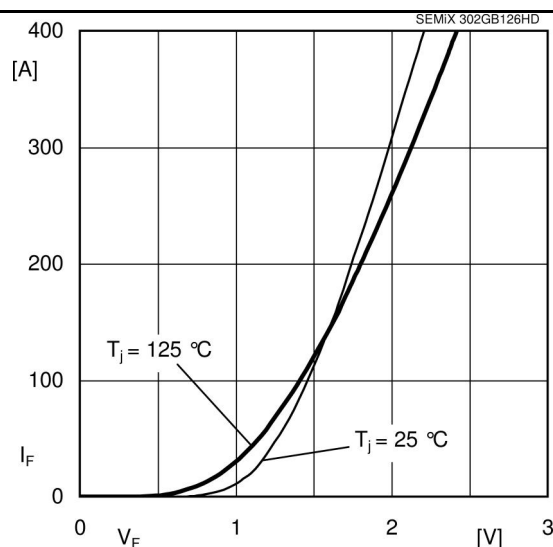


Fig. 10 Typ. CAL diode forward charact., incl. $R_{CC+EE'}$

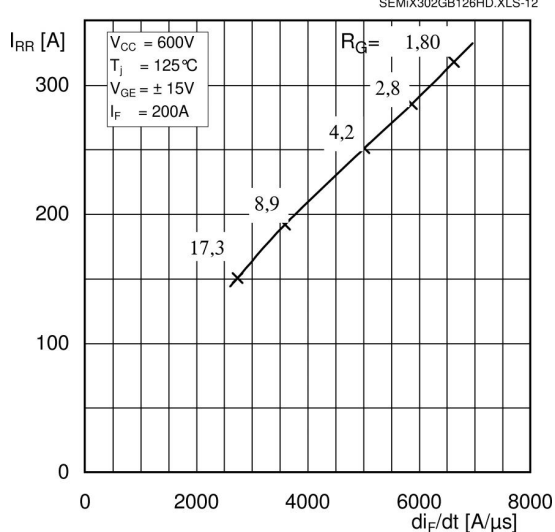


Fig. 11 Typ. CAL diode peak reverse recovery current


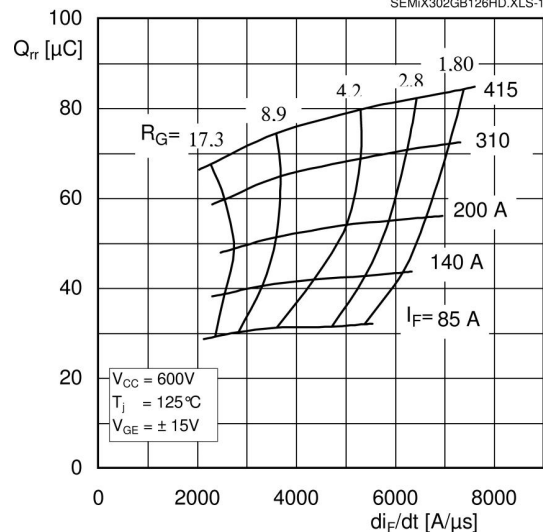


Fig. 12 Typ. CAL diode recovery charge


[查询"SEMIX302GB126HD_07"供应商](#)

case: SEMiX

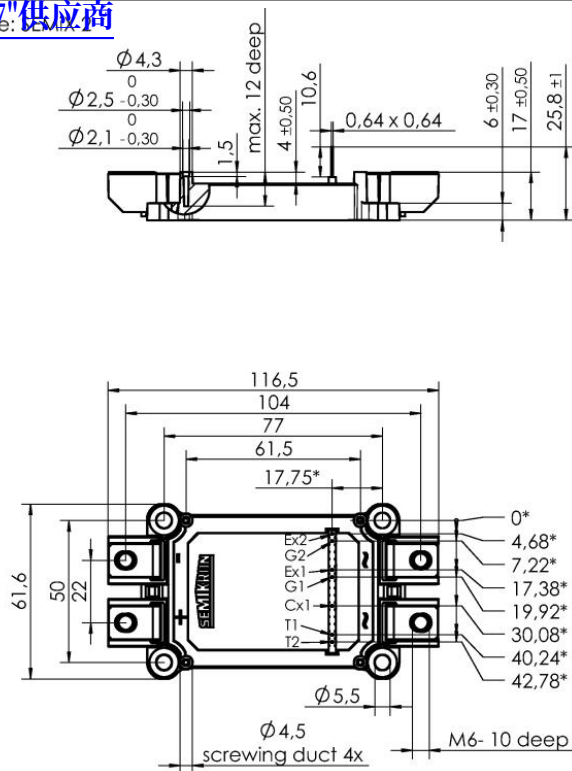

*= all measures with $\phi 0,5$

Case SEMiX 2



Pinout

GB