


SMAT70A/SMBT70A

400W, 600W SURFACE MOUNT TRANSIENT VOLTAGE SUPPRESSOR

NEW PRODUCT

Features

- 400, 600W Peak Pulse Power Dissipation
- 70V Standoff Voltage
- 100V Maximum Clamping Voltage - A requirement of many -48V Backplane Telecom Applications
- Glass Passivated Die Construction
- Fast Response Time: Typically less than 1 ps
- **Lead Free Finish/RoHS Compliant (Note 4)**

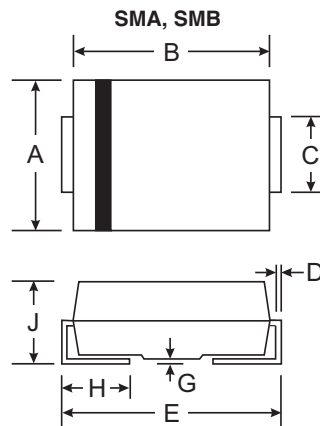

Mechanical Data

- Case: SMA/SMB
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Lead Free Plating (Matte Tin Finish). Solderable per MIL-STD-202, Method 208
- Polarity Indicator: Cathode Band
- Marking: Date Code (See Page 3) and Marking Code (See Page 1)
- Ordering Information: See Page 3
- Weight: SMA 0.064 grams
SMB 0.093 grams

Package	SMAT70A		SMBT70A	
	SMA	SMB	Min	Max
Dim	Min	Max	Min	Max
A	2.29	2.92	3.30	3.94
B	4.00	4.60	4.06	4.57
C	1.27	1.63	1.96	2.21
D	0.15	0.31	0.15	0.31
E	4.80	5.59	5.00	5.59
G	0.10	0.20	0.10	0.20
H	0.76	1.52	0.76	1.52
J	2.01	2.62	2.00	2.62

Maximum Ratings @ T_A = 25°C unless otherwise specified




Characteristic	Symbol	SMAT70A	SMBT70A	Unit
Peak Pulse Power Dissipation (Non repetitive current pulse derated above T _A = 25°C)	P _{PK}	400	600	W
Peak Forward Surge Current, 8.3ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method) (Note 2)	I _{FSM}	40	100	A
Instantaneous Forward Voltage @ I _{PP} = 35A (Note 2)	V _F	3.5		V
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to +150		°C

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Part Number	Reverse Standoff Voltage	Breakdown Voltage V _{BR} @ I _T (Note 3)		Test Current	Max. Reverse Leakage @ V _{RWM}	Max. Clamping Voltage @ I _{PP}	Max. Peak Pulse Current I _{PP}	Typical Junction Capacitance (Note 3)	Typical Voltage Temp. Variation of V _{BR}	Marking Code
	V _{RWM} (V)	Min (V)	Max (V)	I _T (mA)	I _R (μA)	V _C (V)	(A)	(pF)	mV/°C	
SMAT70A	70	77.8	89.5	1.0	5.0	100	3.5	140	80	KEX
SMBT70A	70	77.8	89.5	1.0	5.0	100	5.3	290	80	NPX

- Notes: 1. Measured with 8.3ms single half sine-wave. Duty cycle = 4 pulses per minute maximum.
 2. V_{BR} measured with I_T current pulse = 300μs.
 3. f = 1MHz, V_R = 0VDC.
 4. RoHS revision 13.2.2003. Glass and High Temperature Solder Exemptions Applied, see EU Directive Annex Notes 5 and 7.

[查询"SMAT70A-13-F"供应商](#)

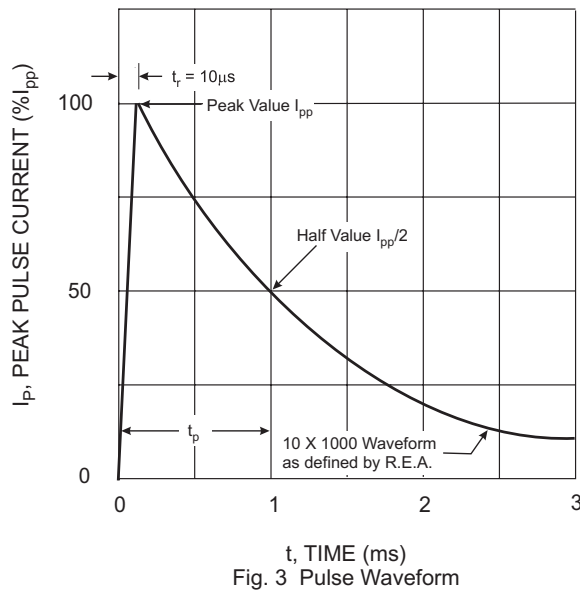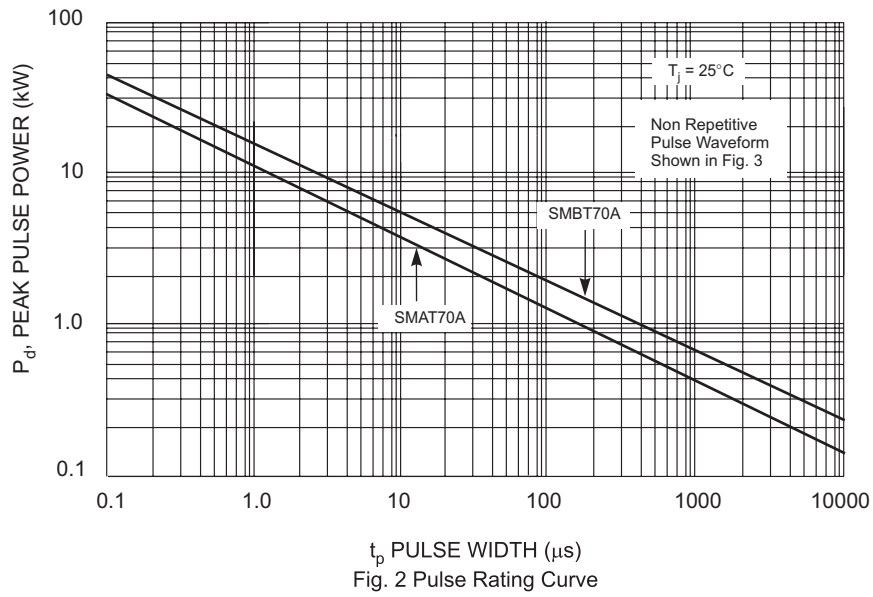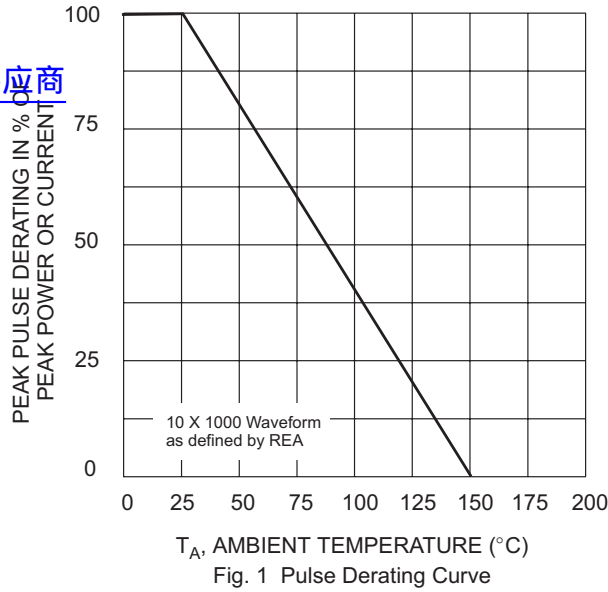

[查询"SMAT70A-13-F"供应商](#)

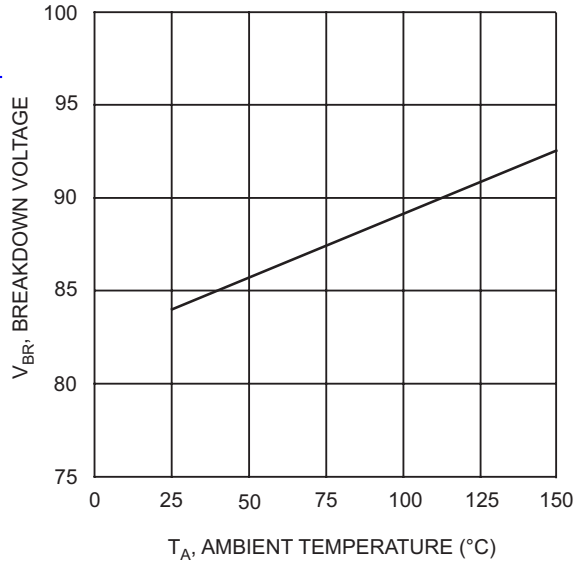



Fig. 4 Average Breakdown Voltage vs. Ambient Temperature

Ordering Information (Note 5)

Device	Packaging	Shipping
SMAT70A-13-F	SMA	5000/Tape & Reel
SMBT70A-13-F	SMB	3000/Tape & Reel

Notes: 5. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



XXX = Product type marking code (See Sheet 1)
 D11 = Manufacturers' code marking
 YWW = Date code marking
 Y = Last digit of year ex: 2 for 2002
 WW = Week code 01 to 52

IMPORTANT NOTICE

Diodes, Inc. and its subsidiaries reserve the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. Diodes, Inc. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

The products located on our website at www.diodes.com are not recommended for use in life support systems where a failure or malfunction of the component may directly threaten life or cause injury without the express written approval of Diodes Incorporated.