



10 Amp MINIATURE PLASTIC SILICON RECTIFIERS

FR10A01 . . . 07 Series

Description



Mechanical Dimensions

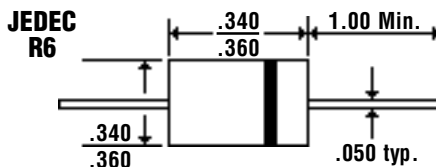

Features


- LOW COST
- LOW LEAKAGE
- DIFFUSED JUNCTION
- MEETS UL SPECIFICATION 94V-0

FR10A01 . . . 07 Series								Units	
Maximum Ratings	FR10A01	FR10A02	FR10A03	FR10A04	FR10A05	FR10A06	FR10A07		
Peak Repetitive Reverse Voltage...V _{RRM}	50	100	200	400	600	800	1000	Volts	
RMS Reverse Voltage...V _{R(rms)}	35	70	140	280	420	560	700	Volts	
DC Blocking Voltage...V _{DC}	50	100	200	400	600	800	1000	Volts	
Average Forward Rectified Current...I _{F(av)} T _A = 60°C (Note 3)				10				Amps	
Non-Repetitive Peak Forward Surge Current...I _{FSM} @ Rated Current & Temp				600				Amps	
Operating & Storage Temperature Range...T _J , T _{STRG}				-65 to 175				°C	
Electrical Characteristics									
Maximum Forward Voltage @ 10A...V _F				1.0				Volts	
Maximum DC Reverse Current...I _R @ Rated DC Blocking Voltage	25°C				10				μAmps
	100°C				100				μAmps
Maximum Full Load Reverse Current...I _R				25				μAmps	
Typical Junction Capacitance...C _J (Note 1)				100				pF	
Typical Thermal Resistance...R _{θJA} (Note 2)				10				°C / W	


10 Amp MINIATURE PLASTIC SILICON RECTIFIERS

FR10A01 . . . 07 Series


Typical Thermal Resistance vs. Lead Length

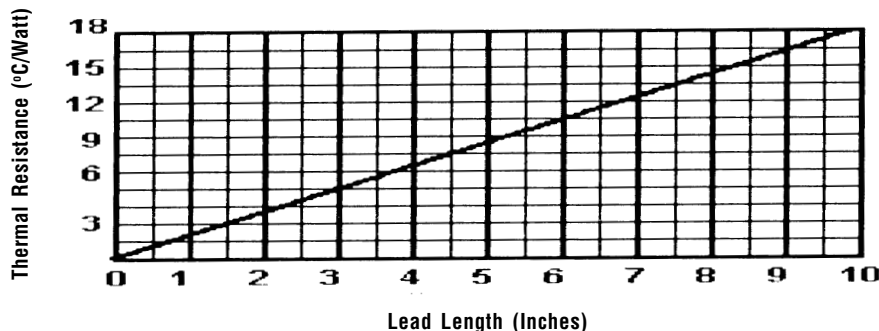


Typical Forward Characteristics

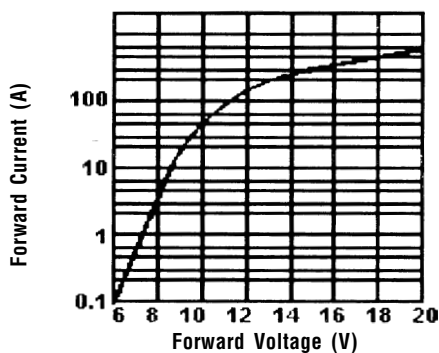


Typical Reverse Characteristics

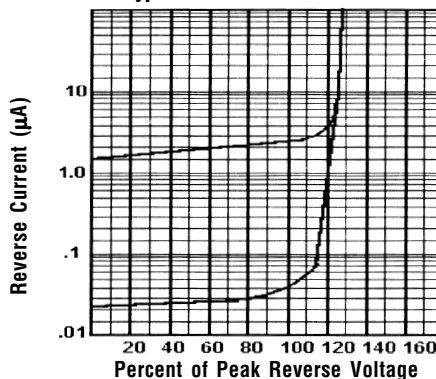

Maximum Non-Repetitive Surge Current

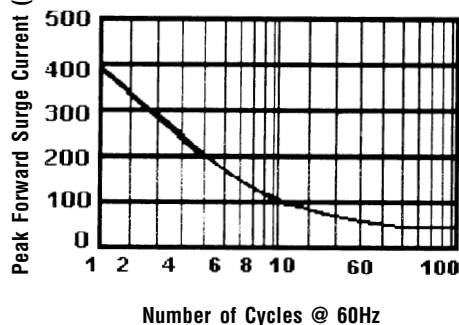

Forward Current Derating Curve

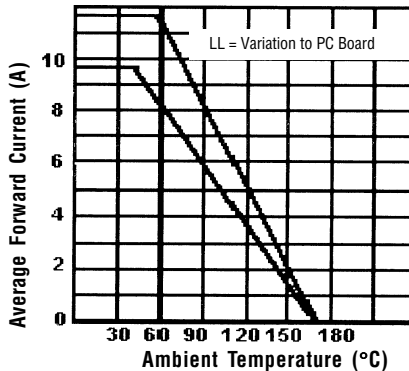

Ratings at
25 Deg. C ambient
temperature
unless otherwise
specified.

Single Phase Half
Wave, 60 Hz
Resistive or
Inductive Load.

For Capacitive
Load, Derate
Current by 20%.

- NOTES:**
1. Measured @ 1 MHz and applied reverse voltage of 4.0V.
 2. Thermal Resistance Junction to Ambient, Jedec Method.
 3. .375", (9.5mm) lead lengths.