





查询"2N6788L"供应商

**SEME
LAB**

2N6788L

Dimensions in mm (inches).

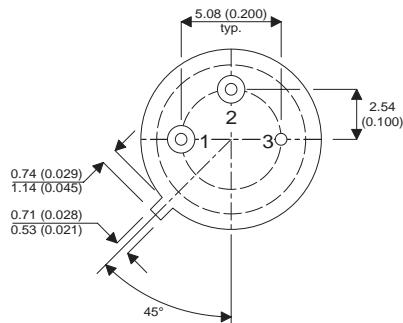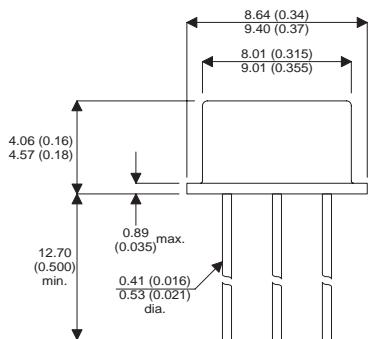

TO39 (TO205AF)

PINOUTS

1 – Source 2 – Gate 3 - Drain

**N-Channel MOSFET
in a
Hermetically sealed TO39
Metal Package.**

N-Channel MOSFET.

$V_{DSS} = 100V$

$I_D = 4.5A$

$R_{DS(ON)} = 0.3\Omega$

All Semelab hermetically sealed products can be processed in accordance with the requirements of BS, CECC and JAN, JANTX, JANTXV and JANS specifications.

	Parameter	Min.	Typ.	Max.	Units
V_{DSS}	Drain – Source Breakdown Voltage			100	V
I_D	Continuous Drain Current			4.5	A
P_D	Power Dissipation			20	W
$R_{DS(ON)}$	Static Drain – Source On-State Resistance			0.3	Ω
C_{ISS}	Input Capacitance	350			pF
Q_g	Total Gate Charge			17	nC
$t_{td(on)}$	Turn-On Delay Time			40	ns
t_{tr}	Rise Time			70	ns
$t_{td(off)}$	Turn-Off Delay Time			40	ns
t_f	Fall Time			70	ns

This is a shortform datasheet. For a full datasheet please contact sales@semelab.co.uk.

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use.

Semelab plc.

Telephone +44(0)1455 556565. Fax +44(0)1455 552612.

E-mail: sales@semelab.co.uk Website: <http://www.semelab.co.uk>

Generated
11-Oct-02