



# MBRS130LTRPbF

SCHOTTKY RECTIFIER

1 Amp

$I_{F(AV)} = 1.0 \text{ Amp}$   
 $V_R = 30V$

### Major Ratings and Characteristics

Characteristics	Value	Units
$I_{F(AV)}$ Rectangular waveform	1.0	A
$V_{RRM}$	30	V
$I_{FSM}$ @ $t_p = 5 \mu s$ sine	230	A
$V_F$ @ 1.0Apk, $T_J = 125^\circ C$	0.30	V
$T_J$ range	- 55 to 125	$^\circ C$


### Description/ Features


The MBRS130LTRPbF surface-mount Schottky rectifier has been designed for applications requiring low forward drop and small foot prints on PC boards. Typical applications are in disk drives, switching power supplies, converters, free-wheeling diodes, battery charging, and reverse battery protection.

- Small foot print, surface mountable
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead-Free ("PbF" suffix)

**Case Styles**

MBRS130LTRPbF





SMB

MBRS130LTRPbF

Bulletin PD-20403 07/04

International  
 Rectifier

### Voltage Ratings

Part number	MBRS130LTRPbF
$V_R$ Max. DC Reverse Voltage (V)	30
$V_{RWM}$ Max. Working Peak Reverse Voltage (V)	

### Absolute Maximum Ratings

Parameters	Value	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current	1.0	A	50% duty cycle @ $T_L = 106^\circ\text{C}$ , rectangular wave form
$I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current	230	A	5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse
	40		10ms Sine or 6ms Rect. pulse
$E_{AS}$ Non-Repetitive Avalanche Energy	3.0	mJ	$T_J = 25^\circ\text{C}$ , $I_{AS} = 1\text{A}$ , $L = 6\text{mH}$
$I_{AR}$ Repetitive Avalanche Current	1.0	A	Current decaying linearly to zero in 1 $\mu\text{sec}$ Frequency limited by $T_J$ max. $V_a = 1.5 \times V_r$ typical

### Electrical Specifications

Parameters	Value	Units	Conditions	
$V_{FM}$ Max. Forward Voltage Drop (1)	0.420	V	@ 1A	$T_J = 25^\circ\text{C}$
	0.470	V	@ 2A	
	0.300	V	@ 1A	$T_J = 125^\circ\text{C}$
	0.370	V	@ 2A	
$I_{RM}$ Max. Reverse Leakage Current (1)	1	mA	$T_J = 25^\circ\text{C}$	$V_R = \text{rated } V_R$
	10	mA	$T_J = 100^\circ\text{C}$	
	20	mA	$T_J = 125^\circ\text{C}$	
$C_T$ Max. Junction Capacitance	200	pF	$V_R = 5V_{DC}$ (test signal range 100KHz to 1Mhz) $25^\circ\text{C}$	
$L_S$ Typical Series Inductance	2.0	nH	Measured lead to lead 5mm from package body	
$dv/dt$ Max. Voltage Rate of Change (Rated $V_R$ )	10000	V/ $\mu\text{s}$		

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

### Thermal-Mechanical Specifications

Parameters	Value	Units	Conditions
$T_J$ Max. Junction Temperature Range(*)	-55 to 125	$^\circ\text{C}$	
$T_{stg}$ Max. Storage Temperature Range	-55 to 150	$^\circ\text{C}$	
$R_{thJL}$ Max. Thermal Resistance Junction to Lead (**)	25	$^\circ\text{C}/\text{W}$	DC operation (See Fig. 4)
$R_{thJA}$ Max. Thermal Resistance Junction to Ambient	80	$^\circ\text{C}/\text{W}$	DC operation
wt Approximate Weight	0.10(0.003)	g(oz.)	
Case Style	SMB		Similar to DO-214AA
Device Marking	IR13L		

(\*)  $\frac{dP_{tot}}{dT_J} < \frac{1}{R_{th(j-a)}}$  thermal runaway condition for a diode on its own heatsink

(\*\*) Mounted 1 inch square PCB

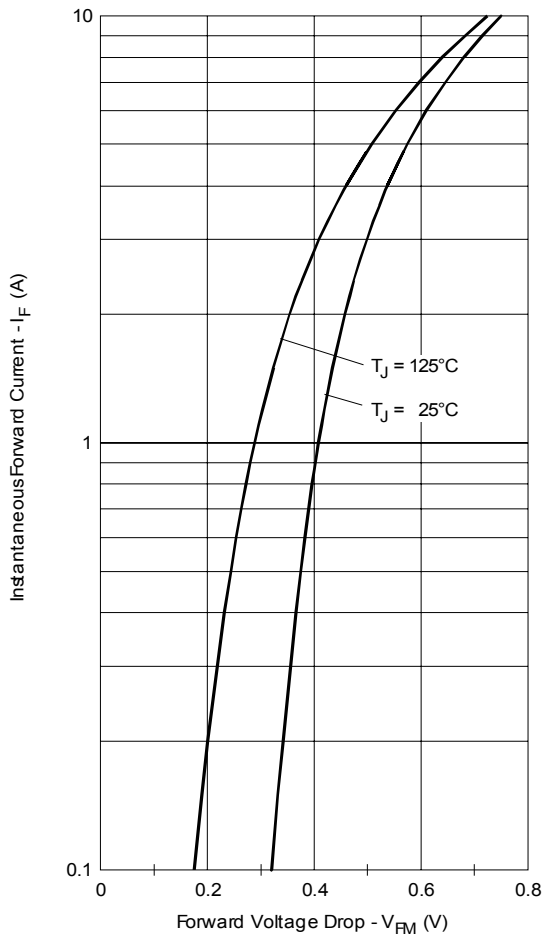


Fig. 1 - Maximum Forward Voltage Drop Characteristics

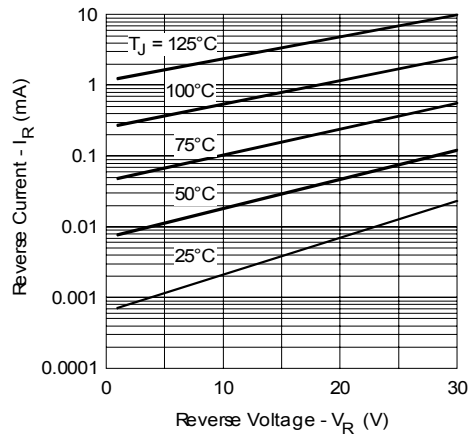


Fig. 2 - Typical Peak Reverse Current Vs. Reverse Voltage

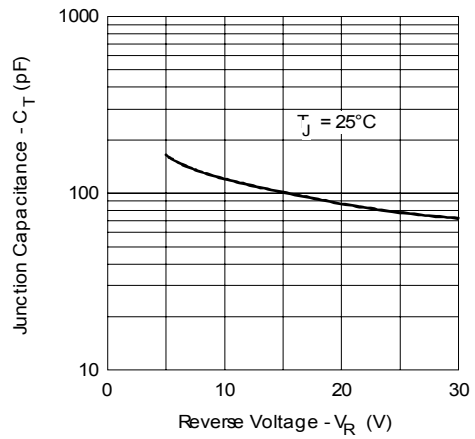


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

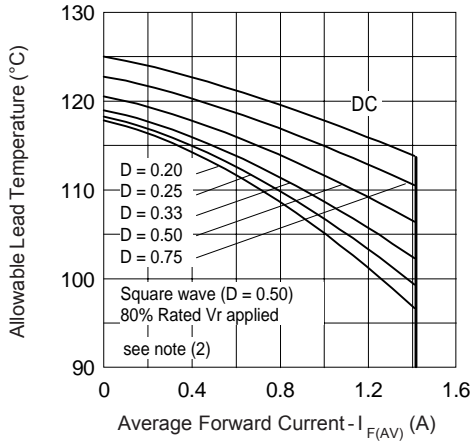


Fig. 4 - Maximum Average Forward Current Vs. Allowable Lead Temperature

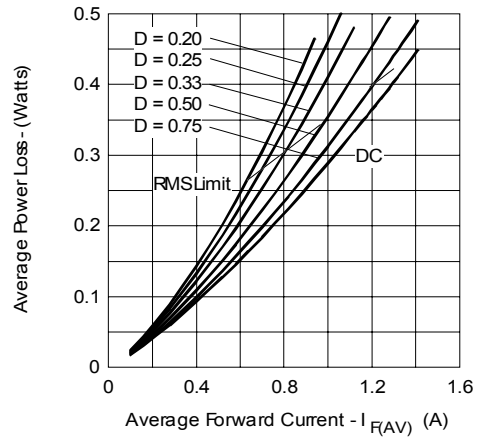


Fig. 5 - Maximum Average Forward Dissipation Vs. Average Forward Current

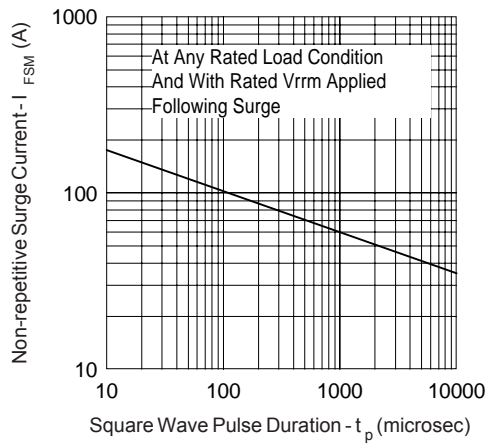



Fig. 6 - Maximum Peak Surge Forward Current Vs. Pulse Duration

(2) Formula used:  $T_c = T_j - (Pd + Pd_{REV}) \times R_{thJC}$ ;


$Pd$  = Forward Power Loss =  $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);

$Pd_{REV}$  = Inverse Power Loss =  $V_{R1} \times I_R (1 - D)$ ;  $I_R @ V_{R1} = 80\%$  rated  $V_R$

Outline Table

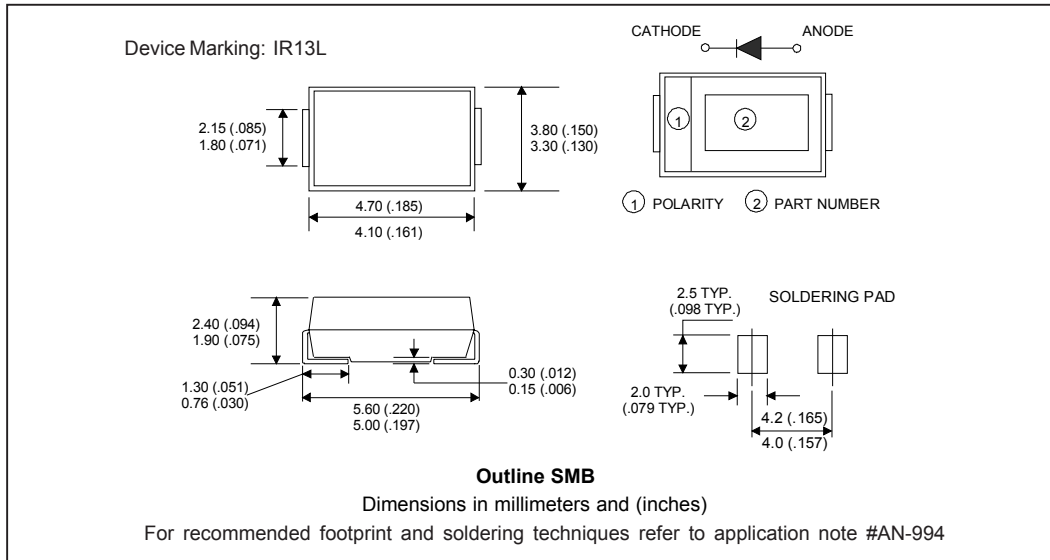

Marking & Identification

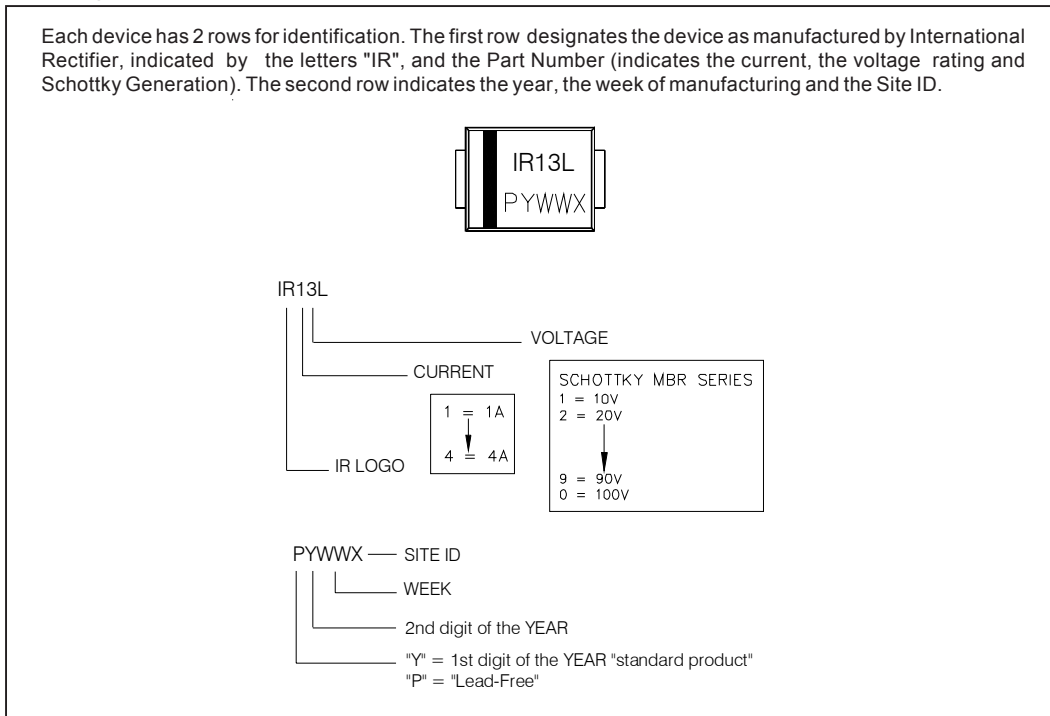


MBRS130LTRPbF

Bulletin PD-20403 07/04

International  
**IR** Rectifier

Tape & Reel Information

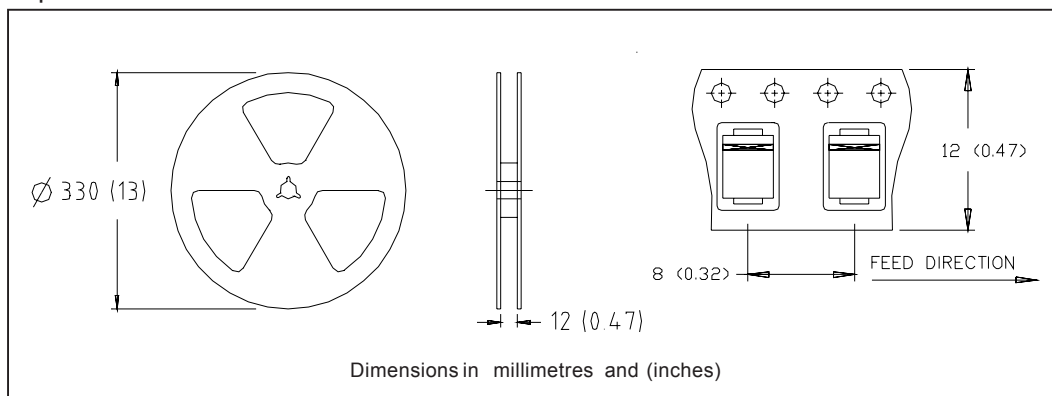

Ordering Information Table

Device Code	
<b>MBR</b>	<b>S</b>
<b>1</b>	<b>30</b>
<b>L</b>	<b>TR</b>
<b>PbF</b>	
①	②
③	④
⑤	⑥
⑦	

- 1** - Schottky MBR Series
- 2** - S = SMB
- 3** - Current Rating (1 = 1 A)
- 4** - Voltage Rating (30 = 30V)
- 5** - L = Low Forward Voltage
- 6** - TR = Tape & Reel (3000 pieces)
- 7** -
  - none = Standard Production
  - PbF = Lead-Free

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level and Lead-Free.  
Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 07/04