


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		AI	REVISED PER ECO-09-010030	23APR2009	SS	MS

1. CABLE DIAMETER RANGE: $\varnothing 4.5 - \varnothing 6.9$
- 2 36.9 IN-LBS TORQUE RECOMMENDED FOR DOME NUT.
- 3 INTERFACIAL SEAL IS SECURED TO HOUSING WITH ADHESIVE.

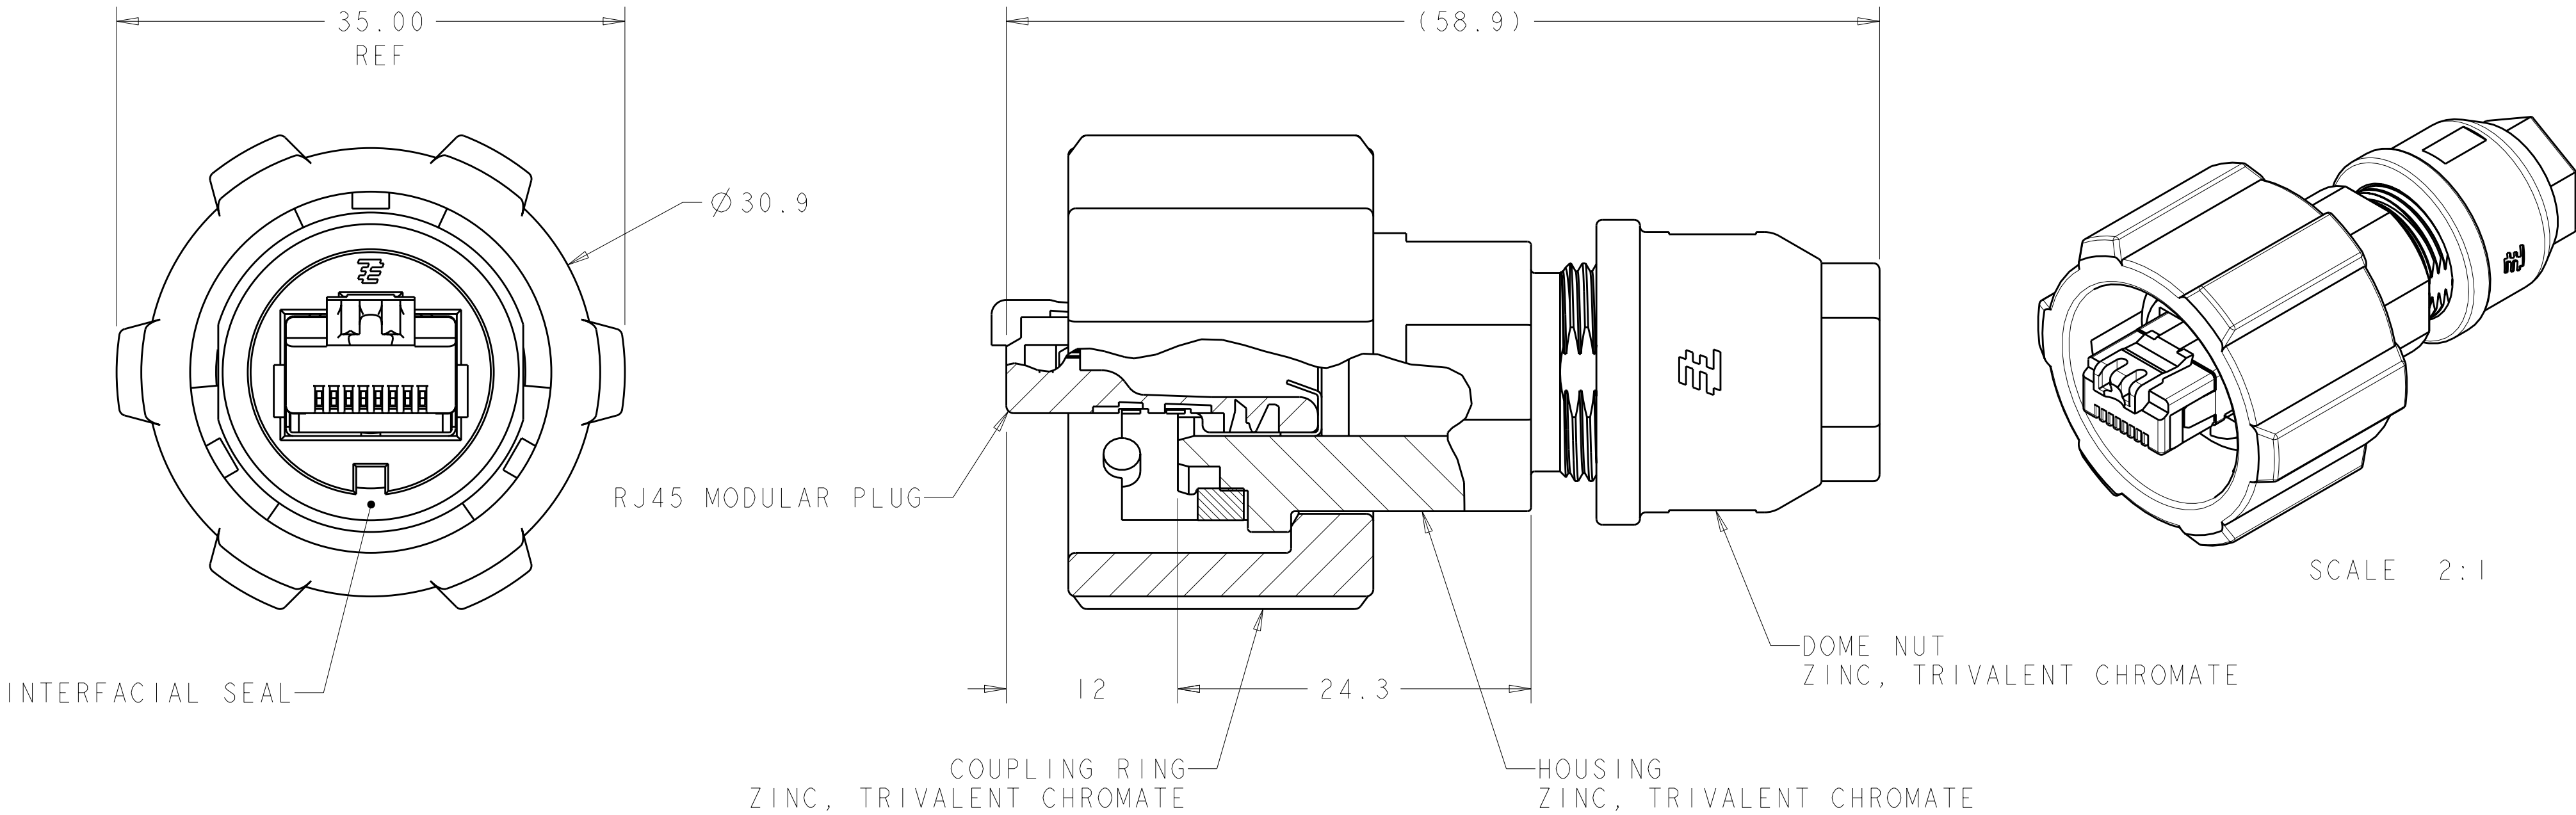

SOLID WIRE	2008614-2
STRANDED WIRE	2008614-1
WIRE TYPE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN S. WELDON 26MAR2008	Tyco Electronics Harrisburg, PA 17105-3608			
DIMENSIONS:		CHK C. HERTZLER 26MAR2008				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. HERTZLER 26MAR2008	NAME PLUG KIT, SHIELDED, INDUSTRIAL CIRCULAR ETHERNET CONNECTOR			
mm		PRODUCT SPEC 108-2198				
0 PLC ±1.0		APPLICATION SPEC 114-13136	SIZE A200779C-2008614			
1 PLC ±0.2		WEIGHT -				
2 PLC ±0.10		CUSTOMER DRAWING	SCALE 3:1			
3 PLC ±0.000						
4 PLC ±0.0000			SHEET 1 OF 1			
ANGLES ±1°						
FINISH			REV AI			
-						