


[查询"CRF24010D"供应商](#)**CRF24010D****10 W SiC RF Power MESFET Die**

Cree's CRF24010 is a silicon carbide (SiC) RF power Metal-Semiconductor Field-Effect Transistor (MESFET). SiC has superior properties compared to silicon or gallium arsenide, including higher breakdown voltage, higher saturated electron drift velocity, and higher thermal conductivity. SiC MESFETs offer greater power density and wider bandwidths compared to Si and GaAs transistors.

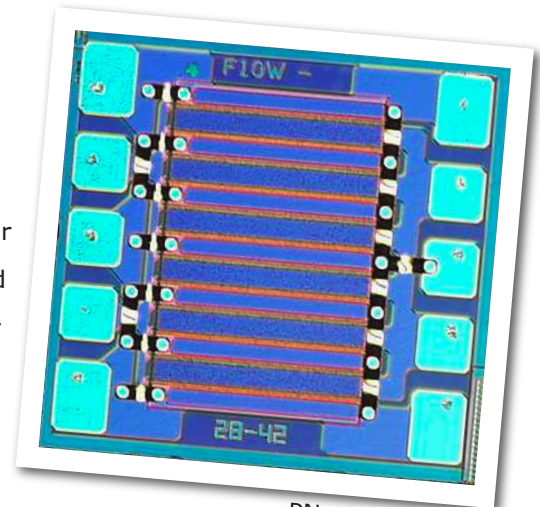


PN: CRF24010D

FEATURES

- 15 dB Small Signal Gain
- 10 W Minimum P_{1dB}
- 48 V Operation
- High Breakdown Voltage
- High Temperature Operation
- Up to 5 GHz Operation
- High Efficiency

APPLICATIONS

- Wideband Military Communications
- Secure Comms for Homeland Defense
- Class A, AB Amplifiers
- TDMA, EDGE, CDMA and W-CDMA
- Broadband Amplifiers
- MMDS

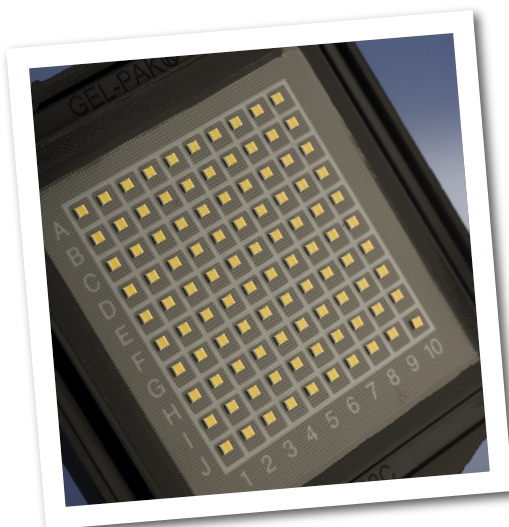**Packaging Information**

- Bare die are shipped in Gel-Pak® containers.
- Non-adhesive tacky membrane immobilizes die during shipment.



查询"CRF24010D"供应商

Absolute Maximum Ratings (not simultaneous) at 25 °C

Parameter	Symbol	Rating	Units
Drain-source Voltage	V_{DS}	120	VDC
Gate-source Voltage	V_{GS}	-20, +3	VDC
Storage Temperature	T_{STG}	-55, 150	°C
Operating Junction Temperature	T_J	255	°C
Thermal Resistance, Junction to Case ¹	$R_{\theta JC}$	5.6	°C/W
Mounting Temperature (30 seconds)	T_S	320	°C

¹Eutectic die attach using 80/20 AuSn mounted to a 40 mil thick CuMoCu carrier.


Electrical Characteristics ($T_c = 25^\circ\text{C}$)

Characteristics	Symbol	Min.	Typ.	Max.	Units	Conditions
DC Characteristics						
Gate Threshold Voltage	$V_{GS(th)}$	-12	-10	-	VDC	$V_{DS} = 10\text{ V}, I_D = 0.5\text{ mA}$
Gate Quiescent Voltage	$V_{GS(Q)}$	-	-9	-	VDC	$V_{DS} = 48\text{ V}, I_D = 250\text{ mA}$
Zero Gate Voltage Drain Current	I_{DSS}	1.2	1.5	1.8	A	$V_{DS} = 10\text{ V}, V_{GS} = 0\text{ V}$
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	100	-	-	VDC	$V_{GS} = -18\text{ V}, I_D = 10\text{ mA}$
Forward Transconductance	g_m	140	160	-	mS	$V_{DS} = 48\text{ V}, I_D = 250\text{ mA}$
RF Characteristics						
Gain	G_{SS}	13	15	-	dB	$V_{DD} = 48\text{ V}, I_{DQ} = 500\text{ mA}, f = 2000\text{ MHz}$
Power Output at 1 dB Compression	P_{1dB}	10	12	-	W	$V_{DD} = 48\text{ V}, I_{DQ} = 500\text{ mA}, f = 2000\text{ MHz}$
Drain Efficiency ^{1,2}	η	40	45	-	%	$V_{DD} = 48\text{ V}, I_{DQ} = 250\text{ mA}, f = 2000\text{ MHz}$ $P_{OUT} = P_{1dB}$
Intermodulation Distortion	IMD_3	-	-31	-	dBc	$V_{DD} = 48\text{ V}, I_{DQ} = 250\text{ mA}$ $f_1 = 2000.0\text{ MHz}, f_2 = 2000.1\text{ MHz}$ $P_{OUT} = 10\text{ W PEP}$
Minimum Noise Figure	NF_{min}	-	3.1	-	dB	$V_{DD} = 48\text{ V}, I_{DQ} = 500\text{ mA}, f = 2000\text{ MHz}$
Output Mismatch Stress	VSWR	10:1	-	-	-	No damage at all phase angles $V_{DD} = 48\text{ V}, I_{DQ} = 500\text{ mA}, f = 2000\text{ MHz}$ $P_{OUT} = 10\text{ W CW}$
Dynamic Characteristics						
Input Capacitance	C_{ISS}	-	1.9	-	pF	$V_{DS} = 48\text{ V}, V_{GS} = -16\text{ V}, f = 1\text{ MHz}$
Output Capacitance	C_{OSS}	-	1.3	-	pF	$V_{DS} = 48\text{ V}, V_{GS} = -16\text{ V}, f = 1\text{ MHz}$
Reverse Transfer Capacitance	C_{RSS}	-	0.44	-	pF	$V_{DS} = 48\text{ V}, V_{GS} = -16\text{ V}, f = 1\text{ MHz}$

Notes:

¹ Drain Efficiency = P_{OUT}/P_{DC}

² Power Added Efficiency (PAE) = $(P_{OUT} - P_{IN})/P_{DC}$

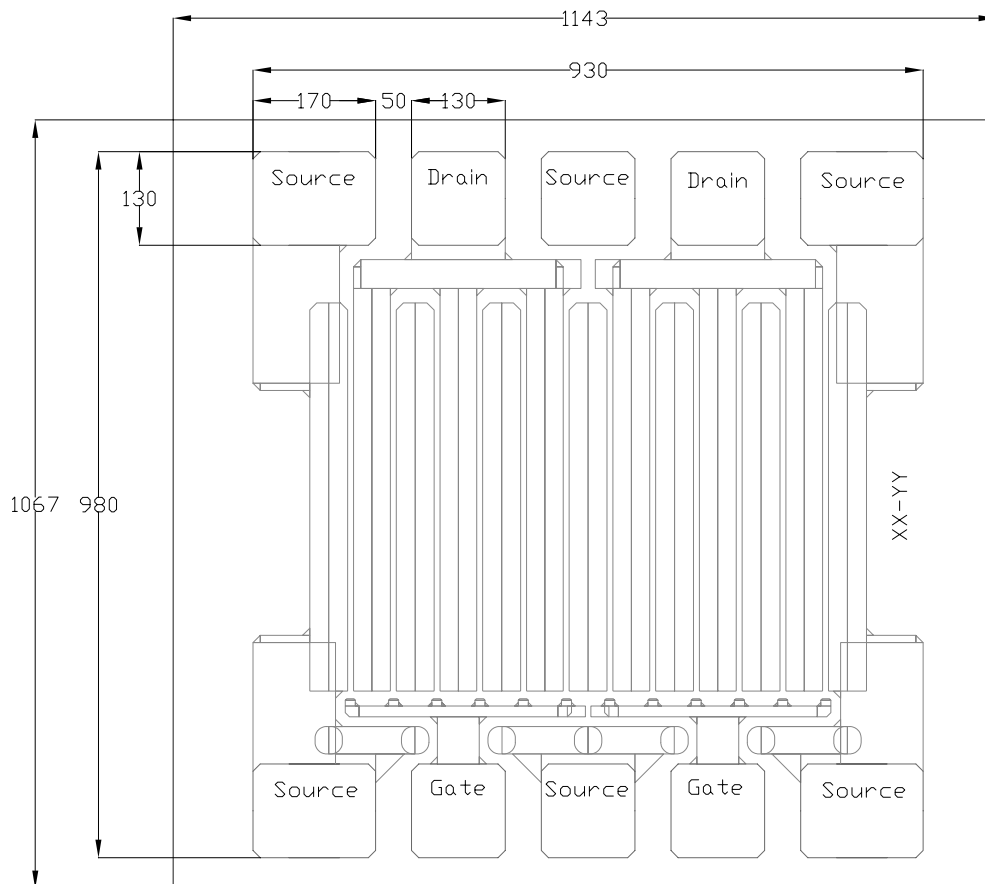


Overall die size 1143 x 1067 (+/-25) microns, die thickness 300 microns
All pads must be bonded for electrical connection (sources not connected to backside metal).

Assembly Notes:

- Recommended solder is AuSn (80/20) solder. Refer to Cree's website for the Eutectic Die Bond Procedure application note at www.cree.com/wireless.
- Vacuum collet is the preferred method of pick-up.
- Die back side gold plating is 5 microns thick minimum.
- Use caution to prevent air bridge damage.
- Thermosonic ball or wedge bonding are the preferred connection methods.
- Gold wire must be used for connections.

Maximum Stable Gain, Maximum Available Gain and K Factor of the CRF24010D

$$V_{DD} = 48 \text{ V}, I_{DQ} = 500 \text{ mA}$$

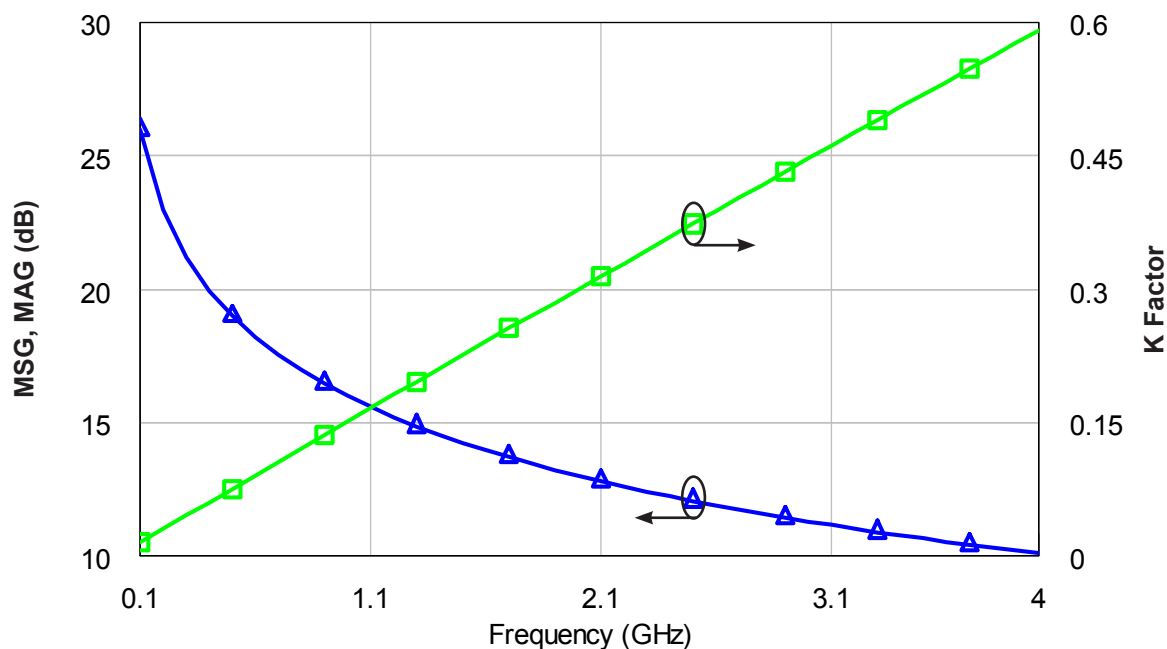

Intrinsic die parameters - reference planes at centers of gate and drain bonding pads. No wire bonds assumed.



[查询"CRF24010D"供应商](#)

Typical Die S-Parameters (Small Signal, $V_{DS} = 48\text{ V}$, $I_{DQ} = 100\text{ mA}$, magnitude / angle)

Frequency	S(1,1)	S(2,1)	S(1,2)	S(2,2)
100.0MHz	0.99267 / -20.318	7.3595 / 167.29	0.022007 / 77.767	0.21373 / -34.427
200.0MHz	0.97487 / -39.393	6.9690 / 155.39	0.041676 / 66.345	0.24838 / -61.654
300.0MHz	0.95169 / -56.399	6.4362 / 144.80	0.057726 / 56.240	0.28699 / -81.339
400.0MHz	0.92819 / -71.036	5.8598 / 135.68	0.070063 / 47.592	0.32133 / -95.582
500.0MHz	0.90720 / -83.393	5.3038 / 127.90	0.079249 / 40.293	0.34943 / -106.11
600.0MHz	0.88969 / -93.743	4.7982 / 121.26	0.086009 / 34.138	0.37185 / -114.06
700.0MHz	0.87559 / -102.41	4.3520 / 115.56	0.090980 / 28.909	0.38986 / -120.19
800.0MHz	0.86443 / -109.70	3.9633 / 110.59	0.094652 / 24.418	0.40462 / -124.97
900.0MHz	0.85567 / -115.87	3.6261 / 106.20	0.097381 / 20.511	0.41706 / -128.78
1.000GHz	0.84882 / -121.13	3.3334 / 102.28	0.099416 / 17.069	0.42785 / -131.83
1.100GHz	0.84349 / -125.66	3.0784 / 98.737	0.100930 / 14.000	0.43750 / -134.32
1.200GHz	0.83935 / -129.58	2.8551 / 95.493	0.102060 / 11.233	0.44633 / -136.37
1.300GHz	0.83616 / -133.00	2.6585 / 92.497	0.102890 / 8.7128	0.45461 / -138.07
1.400GHz	0.83374 / -136.02	2.4845 / 89.705	0.103470 / 6.3968	0.46250 / -139.51
1.500GHz	0.83192 / -138.69	2.3297 / 87.084	0.103870 / 4.2514	0.47012 / -140.72
1.600GHz	0.83061 / -141.07	2.1910 / 84.608	0.104120 / 2.2500	0.47757 / -141.76
1.700GHz	0.82972 / -143.21	2.0664 / 82.256	0.104240 / 0.3715	0.48490 / -142.67
1.800GHz	0.82916 / -145.13	1.9537 / 80.009	0.104260 / -1.4013	0.49216 / -143.46
1.900GHz	0.82890 / -146.88	1.8514 / 77.855	0.104190 / -3.0824	0.49937 / -144.16
2.000GHz	0.82888 / -148.47	1.7582 / 75.783	0.104040 / -4.6831	0.50655 / -144.79
2.100GHz	0.82907 / -149.93	1.6728 / 73.781	0.103830 / -6.2130	0.51372 / -145.36
2.200GHz	0.82944 / -151.27	1.5945 / 71.844	0.103560 / -7.6798	0.52088 / -145.88
2.300GHz	0.82996 / -152.51	1.5223 / 69.964	0.103240 / -9.0901	0.52803 / -146.37
2.400GHz	0.83062 / -153.66	1.4556 / 68.136	0.102880 / -10.449	0.53518 / -146.82
2.500GHz	0.83139 / -154.73	1.3937 / 66.354	0.102480 / -11.763	0.54231 / -147.25
2.600GHz	0.83226 / -155.72	1.3362 / 64.616	0.102050 / -13.034	0.54943 / -147.66
2.700GHz	0.83321 / -156.66	1.2826 / 62.918	0.101590 / -14.266	0.55653 / -148.06
2.800GHz	0.83425 / -157.54	1.2326 / 61.256	0.101090 / -15.462	0.56361 / -148.44
2.900GHz	0.83534 / -158.37	1.1857 / 59.628	0.100580 / -16.626	0.57065 / -148.82
3.000GHz	0.83650 / -159.15	1.1418 / 58.032	0.100040 / -17.758	0.57766 / -149.18
3.100GHz	0.83771 / -159.89	1.1005 / 56.467	0.099479 / -18.862	0.58463 / -149.55
3.200GHz	0.83896 / -160.60	1.0617 / 54.929	0.098901 / -19.939	0.59154 / -149.90
3.300GHz	0.84024 / -161.27	1.0250 / 53.418	0.098306 / -20.989	0.59841 / -150.26
3.400GHz	0.84156 / -161.92	0.99039 / 51.932	0.097697 / -22.016	0.60522 / -150.61
3.500GHz	0.84291 / -162.53	0.95764 / 50.471	0.097075 / -23.020	0.61196 / -150.97
3.600GHz	0.84427 / -163.12	0.92662 / 49.033	0.096440 / -24.001	0.61863 / -151.32
3.700GHz	0.84566 / -163.69	0.89720 / 47.616	0.095794 / -24.962	0.62523 / -151.67
3.800GHz	0.84705 / -164.24	0.86925 / 46.221	0.095139 / -25.903	0.63176 / -152.02
3.900GHz	0.84846 / -164.77	0.84268 / 44.847	0.094475 / -26.825	0.63820 / -152.38
4.000GHz	0.84988 / -165.28	0.81739 / 43.492	0.093804 / -27.728	0.64457 / -152.73



[查询"CRF24010D"供应商](#)

Typical Die S-Parameters (Small Signal, $V_{DS} = 48\text{ V}$, $I_{DQ} = 250\text{ mA}$, magnitude / angle)

Frequency	S(1,1)	S(2,1)	S(1,2)	S(2,2)
100.0MHz	0.99189 / -21.939	8.4860 / 166.58	0.021161 / 77.031	0.17500 / -46.177
200.0MHz	0.97244 / -42.339	7.9748 / 154.15	0.039769 / 65.054	0.23158 / -76.017
300.0MHz	0.94793 / -60.239	7.2952 / 143.28	0.054564 / 54.646	0.28669 / -94.931
400.0MHz	0.92397 / -75.374	6.5808 / 134.09	0.065617 / 45.910	0.33137 / -107.91
500.0MHz	0.90330 / -87.935	5.9095 / 126.40	0.073639 / 38.667	0.36554 / -117.30
600.0MHz	0.88653 / -98.303	5.3125 / 119.92	0.079419 / 32.650	0.39141 / -124.32
700.0MHz	0.87333 / -106.88	4.7948 / 114.42	0.083602 / 27.600	0.41127 / -129.69
800.0MHz	0.86307 / -114.02	4.3502 / 109.67	0.086655 / 23.304	0.42690 / -133.87
900.0MHz	0.85513 / -120.02	3.9687 / 105.51	0.088904 / 19.595	0.43957 / -137.18
1.000GHz	0.84898 / -125.10	3.6404 / 101.81	0.090572 / 16.346	0.45018 / -139.83
1.100GHz	0.84421 / -129.45	3.3565 / 98.471	0.091814 / 13.463	0.45935 / -141.98
1.200GHz	0.84053 / -133.21	3.1093 / 95.428	0.092735 / 10.873	0.46751 / -143.74
1.300GHz	0.83769 / -136.47	2.8927 / 92.624	0.093412 / 8.5216	0.47495 / -145.20
1.400GHz	0.83552 / -139.34	2.7017 / 90.016	0.093899 / 6.3653	0.48188 / -146.42
1.500GHz	0.83389 / -141.88	2.5323 / 87.571	0.094235 / 4.3715	0.48846 / -147.45
1.600GHz	0.83270 / -144.14	2.3811 / 85.262	0.094449 / 2.5140	0.49480 / -148.32
1.700GHz	0.83186 / -146.16	2.2455 / 83.070	0.094564 / 0.77226	0.50097 / -149.07
1.800GHz	0.83132 / -147.98	2.1231 / 80.977	0.094596 / -0.87042	0.50703 / -149.71
1.900GHz	0.83103 / -149.63	2.0123 / 78.970	0.094558 / -2.4275	0.51301 / -150.27
2.000GHz	0.83095 / -151.14	1.9114 / 77.039	0.094461 / -3.9099	0.51895 / -150.77
2.100GHz	0.83105 / -152.51	1.8192 / 75.174	0.094313 / -5.3268	0.52487 / -151.21
2.200GHz	0.83130 / -153.78	1.7346 / 73.367	0.094313 / -5.3268	0.53078 / -151.61
2.300GHz	0.83169 / -154.94	1.6568 / 71.612	0.093888 / -7.9928	0.53668 / -151.97
2.400GHz	0.83219 / -156.02	1.5849 / 69.905	0.093621 / -9.2534	0.54259 / -152.30
2.500GHz	0.83279 / -157.03	1.5183 / 68.240	0.093323 / -10.472	0.54850 / -152.61
2.600GHz	0.83348 / -157.97	1.4565 / 66.615	0.092997 / -11.653	0.55442 / -152.91
2.700GHz	0.83425 / -158.84	1.3989 / 65.024	0.092646 / -12.798	0.56034 / -153.18
2.800GHz	0.83509 / -159.67	1.3452 / 63.467	0.092272 / -13.912	0.56626 / -153.45
2.900GHz	0.83598 / -160.45	1.2949 / 61.940	0.091878 / -14.996	0.57218 / -153.71
3.000GHz	0.83693 / -161.18	1.2477 / 60.441	0.091464 / -16.052	0.57809 / -153.96
3.100GHz	0.83793 / -161.88	1.2034 / 58.968	0.091034 / -17.083	0.58400 / -154.21
3.200GHz	0.83897 / -162.54	1.1617 / 57.520	0.090587 / -18.090	0.58989 / -154.45
3.300GHz	0.84005 / -163.17	1.1224 / 56.097	0.090127 / -19.074	0.59577 / -154.69
3.400GHz	0.84116 / -163.77	1.0852 / 54.695	0.089653 / -20.037	0.60162 / -154.93
3.500GHz	0.84230 / -164.34	1.0501 / 53.314	0.089167 / -20.980	0.60744 / -155.18
3.600GHz	0.84346 / -164.90	1.0168 / 51.953	0.088670 / -21.903	0.61324 / -155.42
3.700GHz	0.84464 / -165.43	0.98524 / 50.611	0.088162 / -22.809	0.61900 / -155.66
3.800GHz	0.84584 / -165.94	0.95526 / 49.288	0.087646 / -23.697	0.62472 / -155.91
3.900GHz	0.84706 / -166.43	0.92673 / 47.982	0.087120 / -24.568	0.63039 / -156.16
4.000GHz	0.84829 / -166.90	0.89958 / 46.694	0.086587 / -25.423	0.63603 / -156.41



[查询"CRF24010D"供应商](#)

Typical Die S-Parameters (Small Signal, $V_{DS} = 48\text{ V}$, $I_{DQ} = 500\text{ mA}$, magnitude / angle)

Frequency	S(1,1)	S(2,1)	S(1,2)	S(2,2)
100.0MHz	0.9908 / -23.969	9.7872 / 165.59	0.020995 / 76.032	0.16990 / -54.425
200.0MHz	0.9690 / -45.966	9.1031 / 152.45	0.039053 / 63.323	0.24179 / -84.694
300.0MHz	0.9428 / -64.866	8.2244 / 141.21	0.052919 / 52.530	0.30581 / -102.83
400.0MHz	0.9183 / -80.486	7.3337 / 131.93	0.062908 / 43.686	0.39018 / -123.87
500.0MHz	0.8981 / -93.182	6.5231 / 124.31	0.06993 / 36.506	0.39018 / -123.87
600.0MHz	0.8822 / -103.48	5.8205 / 118.01	0.074861 / 30.639	0.41619 / -130.40
700.0MHz	0.8701 / -111.88	5.2235 / 112.71	0.078359 / 25.777	0.43558 / -135.36
800.0MHz	0.8609 / -118.79	4.7187 / 108.17	0.080873 / 21.679	0.45046 / -139.21
900.0MHz	0.8538 / -124.55	4.2908 / 104.22	0.082703 / 18.167	0.46229 / -142.25
1.000GHz	0.8484 / -129.40	3.9260 / 100.72	0.084048 / 15.106	0.47201 / -144.67
1.100GHz	0.8443 / -133.52	3.6128 / 97.580	0.085041 / 12.401	0.48027 / -146.64
1.200GHz	0.8412 / -137.07	3.3418 / 94.719	0.085773 / 9.9770	0.48752 / -148.24
1.300GHz	0.8387 / -140.15	3.1055 / 92.085	0.086307 / 7.7804	0.49406 / -149.50
1.400GHz	0.8369 / -142.84	2.8980 / 89.637	0.086688 / 5.7693	0.50009 / -150.67
1.500GHz	0.8355 / -145.22	2.7145 / 87.343	0.086948 / 3.9113	0.50577 / -151.60
1.600GHz	0.8345 / -147.33	2.5513 / 85.177	0.087112 / 2.1814	0.51121 / -152.38
1.700GHz	0.8338 / -149.22	2.4051 / 83.120	0.087196 / 0.5597	0.51648 / -153.04
1.800GHz	0.8334 / -150.92	2.2736 / 81.155	0.087214 / -0.9697	0.52164 / -153.62
1.900GHz	0.8332 / -152.46	2.1546 / 79.270	0.087177 / -2.4198	0.52673 / -154.11
2.000GHz	0.8331 / -153.86	2.0465 / 77.455	0.087092 / -3.8007	0.53178 / -154.54
2.100GHz	0.8332 / -155.14	1.9478 / 75.700	0.086967 / -5.1213	0.53681 / -154.92
2.200GHz	0.8334 / -156.31	1.8575 / 74.000	0.086806 / -6.3880	0.54183 / -155.26
2.300GHz	0.8338 / -157.40	1.7744 / 72.347	0.086613 / -7.6083	0.54686 / -155.56
2.400GHz	0.8342 / -158.40	1.6977 / 70.737	0.086392 / -8.7856	0.55191 / -155.83
2.500GHz	0.8347 / -159.34	1.6268 / 69.166	0.086147 / -9.9246	0.55696 / -156.08
2.600GHz	0.8353 / -160.21	1.5609 / 67.630	0.085878 / -11.029	0.56204 / -156.32
2.700GHz	0.8360 / -161.03	1.4996 / 66.127	0.085589 / -12.102	0.56713 / -156.53
2.800GHz	0.8367 / -161.80	1.4424 / 64.652	0.085281 / -13.146	0.57224 / -156.74
2.900GHz	0.8375 / -162.52	1.3890 / 63.206	0.084956 / -14.163	0.57736 / -156.94
3.000GHz	0.8383 / -163.20	1.3389 / 61.784	0.084616 / -15.155	0.58250 / -157.13
3.100GHz	0.8392 / -163.85	1.2918 / 60.387	0.084261 / -16.124	0.58764 / -157.32
3.200GHz	0.8401 / -164.46	1.2475 / 59.011	0.083892 / -17.072	0.59279 / -157.50
3.300GHz	0.8411 / -165.05	1.2058 / 57.656	0.083511 / -18.000	0.59794 / -157.69
3.400GHz	0.8420 / -165.61	1.1663 / 56.321	0.083119 / -18.908	0.60309 / -157.87
3.500GHz	0.8430 / -166.14	1.1291 / 55.005	0.082716 / -19.799	0.60823 / -158.05
3.600GHz	0.8441 / -166.65	1.0937 / 53.707	0.082303 / -20.672	0.61337 / -158.20
3.700GHz	0.8451 / -167.14	1.0602 / 52.425	0.081881 / -21.530	0.61849 / -158.42
3.800GHz	0.8462 / -167.62	1.0284 / 51.160	0.081451 / -22.371	0.62359 / -158.61
3.900GHz	0.8473 / -168.07	0.9982 / 49.910	0.081012 / -23.199	0.62868 / -158.80
4.000GHz	0.8484 / -168.52	0.9693 / 48.675	0.080567 / -24.011	0.63374 / -158.99



[查询"CRF24010D"供应商](#)

Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for its use or for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications, and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended, or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death, or in applications for the planning, construction, maintenance or direct operation of a nuclear facility. CREE and the CREE logo are registered trademarks of Cree, Inc.

For more information, please contact:

Cree, Inc.
4600 Silicon Drive
Durham, NC 27703
www.cree.com/wireless

Ryan Baker
Cree, Marketing
1.919.287.7816

Tom Dekker
Cree, Sales Director
1.919.313.5639