AMETEK ROTRON TECHNICAL PRODUCTS

查询"116450-01"供应商

Windjammer® BRUSHLESS BLOWERS

5.7" (145mm) BLDC Bypass Blower — 400 WATT, 240 VOLT

Standard Flow

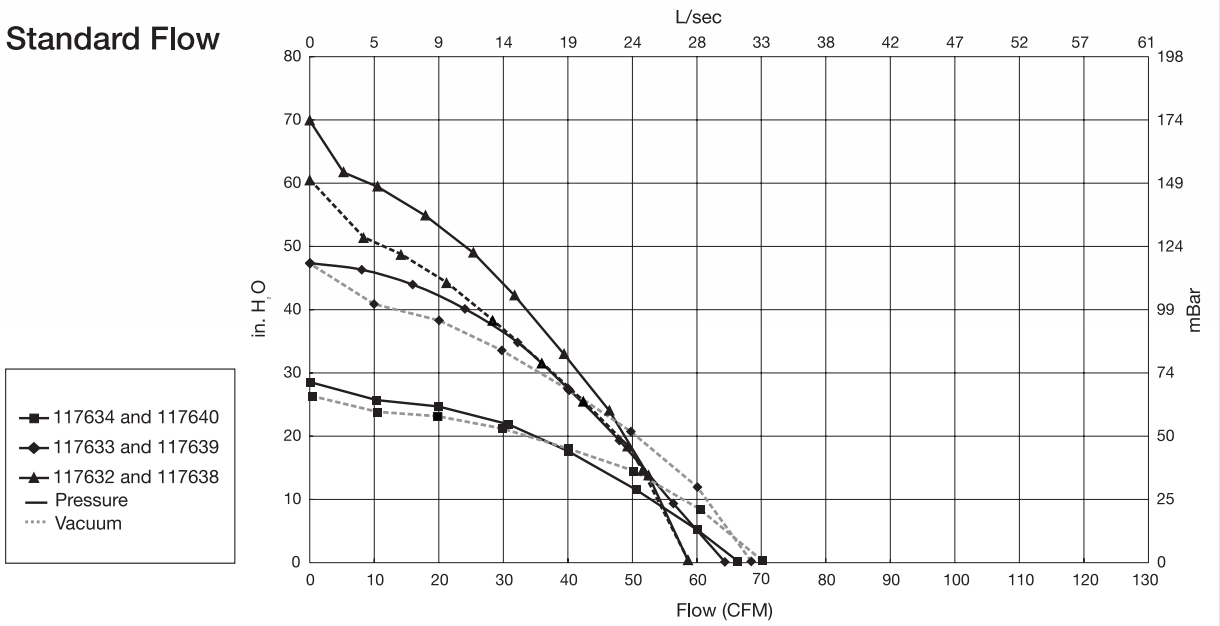

High Flow

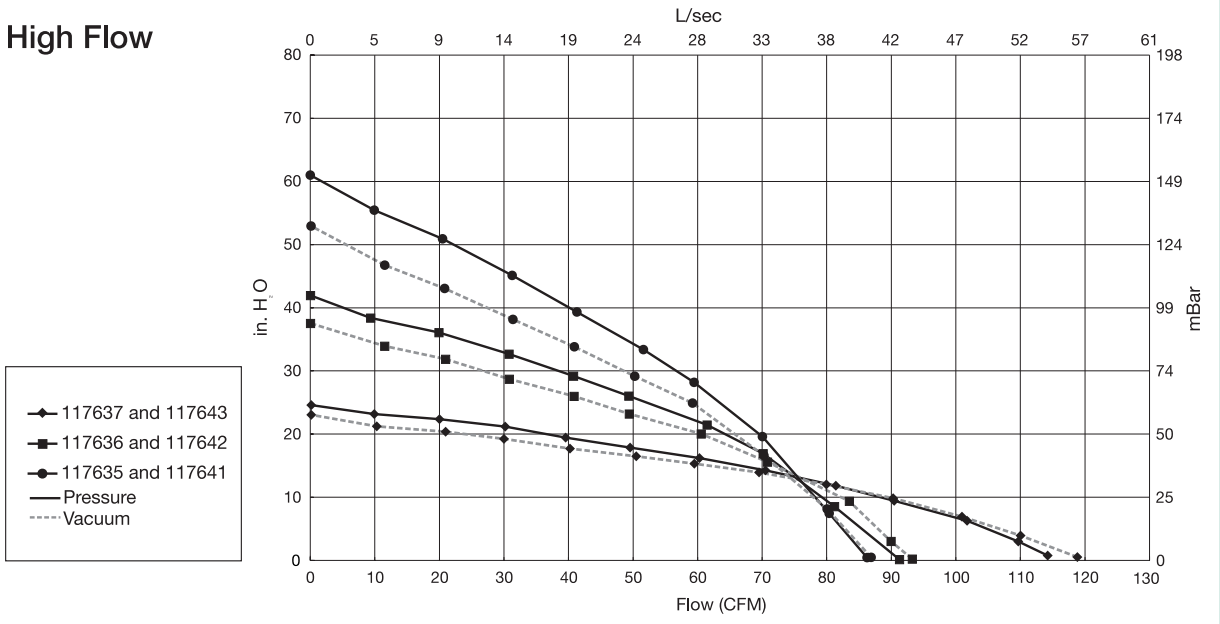

Regulatory Agency Certification: *T.U.V. Rheinland Bauart Certification* is qualified per EN60950 under License No. R0097184. Underwriters Laboratories, Inc. Qualified per UL507 under File E-94403. Canadian Standards Association Qualified per C22.2#113 under File LR 43448.*

Miscellaneous: *Intake & exhaust tubes, all cooling ducts and vents must not be obstructed. Intake and exhaust are free of grease, oil, or foreign particles. Amp housing #1-480763-0 (to be supplied by customer), mates with post header assembly.*

**IEC 801 testing has been completed, and specific data can be provided upon request.*

This document is for informational purposes only and should not be considered as a binding description of the products or their performance in all applications. The performance data on this page depicts typical performance under controlled laboratory conditions, data is corrected to 0.075 lb./ft³ air density (29.92" Hg @ 70° F.). Actual performance will vary depending on the operating environment and application. AMETEK Rotron products are not designed for use with volatile, hazardous or corrosive gases. Blower housings are not sealed, slight air/gas leakage will occur. AMETEK Rotron products are not designed for and should not be used in medical life support applications. AMETEK reserves the right to revise its products without notification.