


120-001



**Type A Series 72 Annular Convolute Tubing**  
**Thermally Stabilized Kynar®**



Series 72  
Convolute  
Tubing

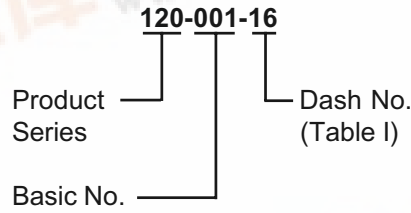

**TYPE  
A**

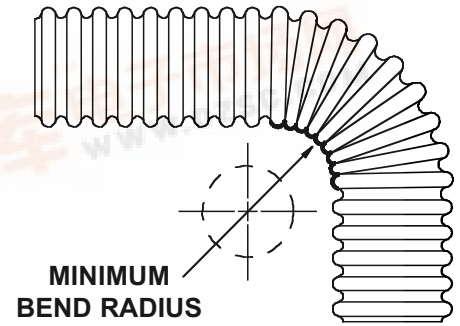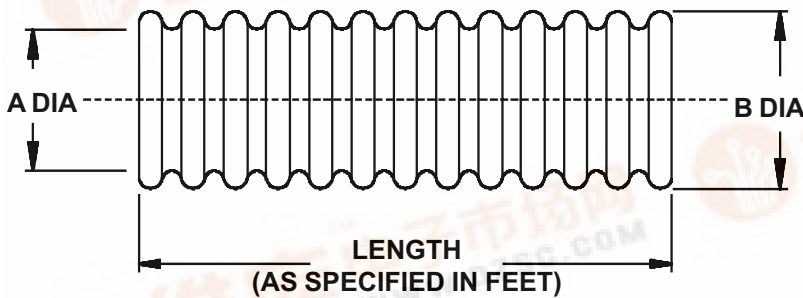

**TABLE I**

DASH NO.	A DIA		B DIA		MINIMUM BEND RADIUS
	MIN	MAX	MIN	MAX	
09	.24 (6.1)	.28 (7.1)	.38 (9.7)	.42 (10.7)	.75 (19.1)
12	.33 (8.4)	.37 (9.4)	.48 (12.2)	.52 (13.2)	1.00 (25.4)
16	.45 (11.4)	.50 (12.7)	.60 (15.2)	.66 (16.8)	1.38 (35.1)
20	.57 (14.5)	.62 (15.7)	.71 (18.0)	.77 (19.6)	1.69 (42.9)
24	.69 (17.5)	.75 (19.1)	.88 (22.4)	.94 (23.9)	1.88 (47.8)
28	.81 (20.6)	.87 (22.1)	1.00 (25.4)	1.08 (27.4)	2.00 (50.8)
32	.93 (23.6)	1.00 (25.4)	1.12 (28.4)	1.20 (30.5)	2.38 (60.5)
40	1.18 (30.0)	1.25 (31.8)	1.36 (34.5)	1.44 (36.6)	2.88 (73.2)

Metric dimensions (mm) are in parentheses.

Note: Tubing supplied in random lengths.  
 For specific size lengths, consult factory.

