



[查询"MMBD3004BRMT/R13"供应商](#)

SURFACE MOUNT HIGH VOLTAGE SWITCHING DIODE ARRAY

This device features two series-connected diode pairs which can be connected to form a full-wave bridge. It is housed in a very small SOT23-6L surface mount package.


FEATURES

- High Reverse Voltage Rating
- Fast Switching Speed
- Low Capacitance
- 100% Matte Tin Finish (LEAD-FREE PRODUCT)

APPLICATIONS

- Power Supplies
- High Speed Rectification

Marking Code: 304

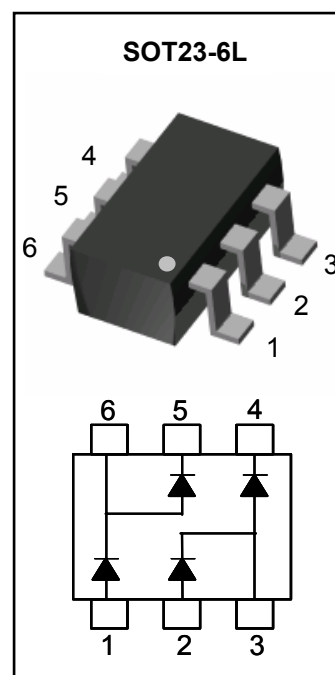

MAXIMUM RATINGS (Per Diode) $T_J = 25^\circ\text{C}$ Unless otherwise noted

Rating	Symbol	Value	Units
Repetitive Peak Reverse Voltage	V_{RRM}	350	V
Continuous Reverse Voltage	V_R	300	V
RMS Reverse Voltage	V_{RMS}	212	V
Continuous Forward Current (Note 1)	I_F	225	mA
Peak Repetitive Forward Current (Note 1)	I_{FRM}	625	mA
Non-repetitive Peak Forward Current, $t = 1\text{sec}$, Square Wave	I_{FSM}	1.0	A
Total Power Dissipation (Note 1)	P_{tot}	350	mW
Operating Junction Temperature Range	T_J	-55 to +150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

Characteristic	Symbol	Value	Units
Thermal Resistance, Junction to Ambient (Note 1)	R_{thja}	357	$^\circ\text{C/W}$

Note 1. FR-5 Board 1.0 x 0.75 x 0.062 in.



查询"MMBD3004BRM/T/R13"供应商

ELECTRICAL CHARACTERISTICS (Per Diode) $T_J = 25^\circ\text{C}$ Unless otherwise noted

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Breakdown Voltage (Note 1)	V_{BR}	$I_{BR} = 150\mu\text{A}$	350	-	-	V
Forward Voltage (Note 1)	V_F	$I_F = 20\text{mA}$	-	0.82	0.87	V
		$I_F = 100\text{mA}$	-	0.95	1.0	
		$I_F = 200\text{mA}$	-	1.0	1.25	
Reverse Leakage Current (Note 1)	I_R	$V_R = 240\text{V}$	-	0.02	0.1	μA
		$V_R = 240\text{V}$ $T_J = 150^\circ\text{C}$	-	0.5	100	
Total Capacitance	C_T	0Vdc Bias, $f = 1\text{MHz}$	-	1.7	5.0	pF
Reverse Recovery Time	t_{rr}	$I_F = I_R = 30\text{mA}$, $I_{RR} = 3\text{mA}$ $R_L = 100\text{ohms}$	-	-	50	ns

Note 1. Short duration pulse test to avoid self-heating effect

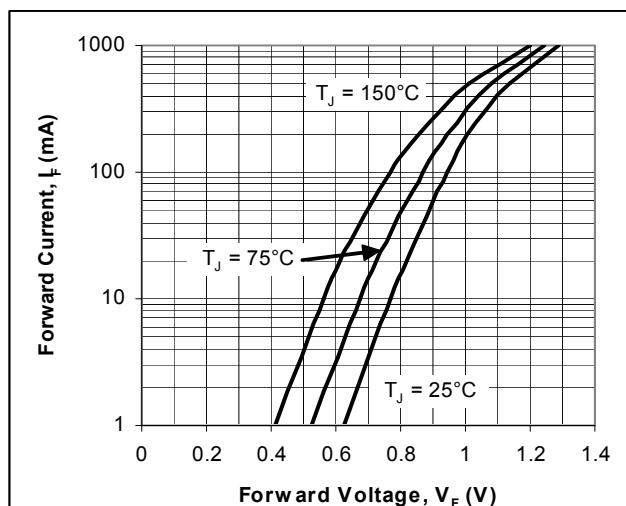


Fig. 1. Typical Forward Characteristics

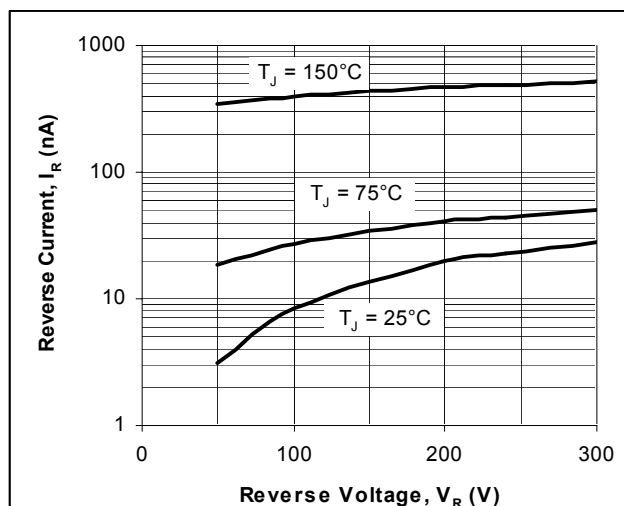


Fig. 2. Typical Reverse Characteristics


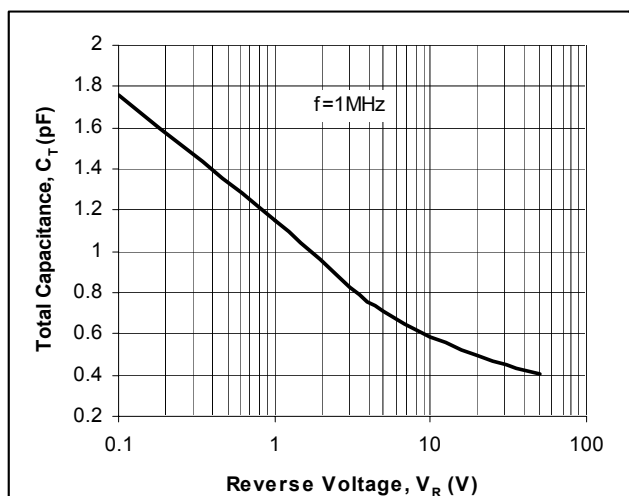


Fig. 3. Typical Capacitance



查询"MMBD3004BRMT/R13"供应商

PACKAGE LAYOUT AND SUGGESTED PAD DIMENSIONS

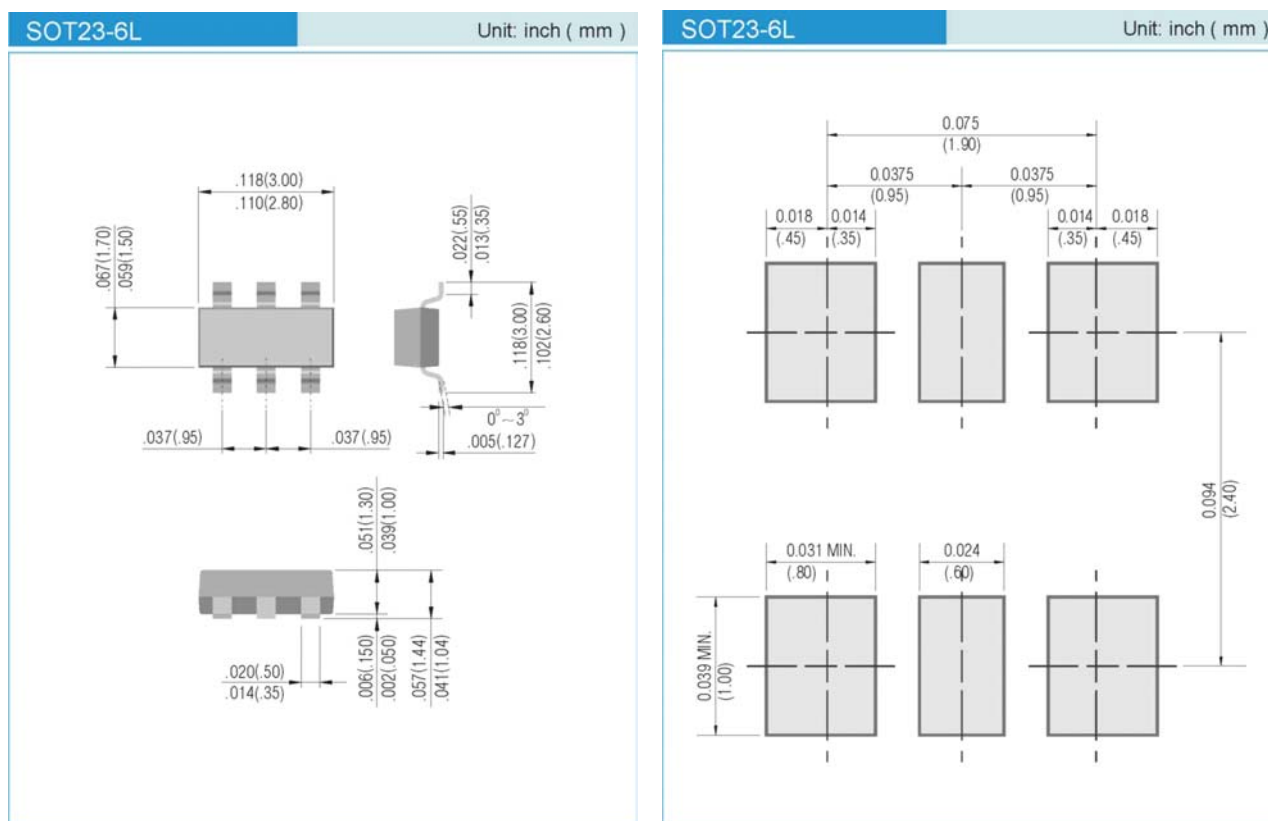

ORDERING INFORMATION

MMBD3004BRM T/R7 - 7" reel, 3K units per reel. Pin 1 towards tape sprocket holes

MMBD3004BRM T/R7R - 7" reel, 3K units per reel. Pin 1 away from tape sprocket holes

MMBD3004BRM T/R13 - 13" reel, 10K units per reel. Pin 1 towards tape sprocket holes

MMBD3004BRM T/R13R - 13" reel, 10K units per reel. Pin 1 away from tape sprocket holes

Copyright PanJit International, Inc 2005

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.