

BRIGHT LED ELECTRONICS

- Device Number : BPI-3C2-03
- Absolute Maximum Rating (Ta=25)

Page: 2
Version: 1.1

Item		Symbol	Rating	Unit
Input	Power Dissipation	Pd	75	mW
	Reverse Voltage	V _R	5	V
	Forward Current	I _F	50	mA
	Peak Forward Current (*1)	I _{FP}	1	A
Output	Collector Power Dissipation	P _C	100	mW
	Collector Current	I _C	20	mA
	C-E Voltage	V _{CEO}	30	V
	E-C Voltage	V _{ECO}	5	V
Operating Temperature		Topr	-25 ~ +85	
Storage Temperature		Tstg	-40 ~ +100	
Soldering Temperature (*2)		Tsol	260	

(*1) tw=100 uSec., T=10 mSec.

(*2) t=5 Sec


- Electrical Optical Characteristics (Ta=25)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit
Input	Forward Voltage	V _F	I _F =20mA	—	1.2	1.5	V
	Reverse Current	I _R	V _R =5V	—	—	100	μ A
	Peak Wavelength	λ p	I _F =10mA		940		nm
Output	Dark Current	I _D	V _{CE} =10V	—	—	100	nA
	C-E Saturation Voltage	V _{CE(sat)}	I _C =0.25mA I _F =10mA	—	—	0.4	V
Light Current		I _L	V _{CE} =5V I _F =10mA	0.5	—	5	mA
Speed	Rise Time	Tr	I _{FP} =20mA V _{CE} =5V	—	20	—	μ sec
	Fall Time	Tf	R _L =1000Ω	—	20	—	μ sec

BRIGHT LED ELECTRONICS

- Device Number : BPI-3C2-03
- Package Dimensions

Page: 3
Version: 1.1

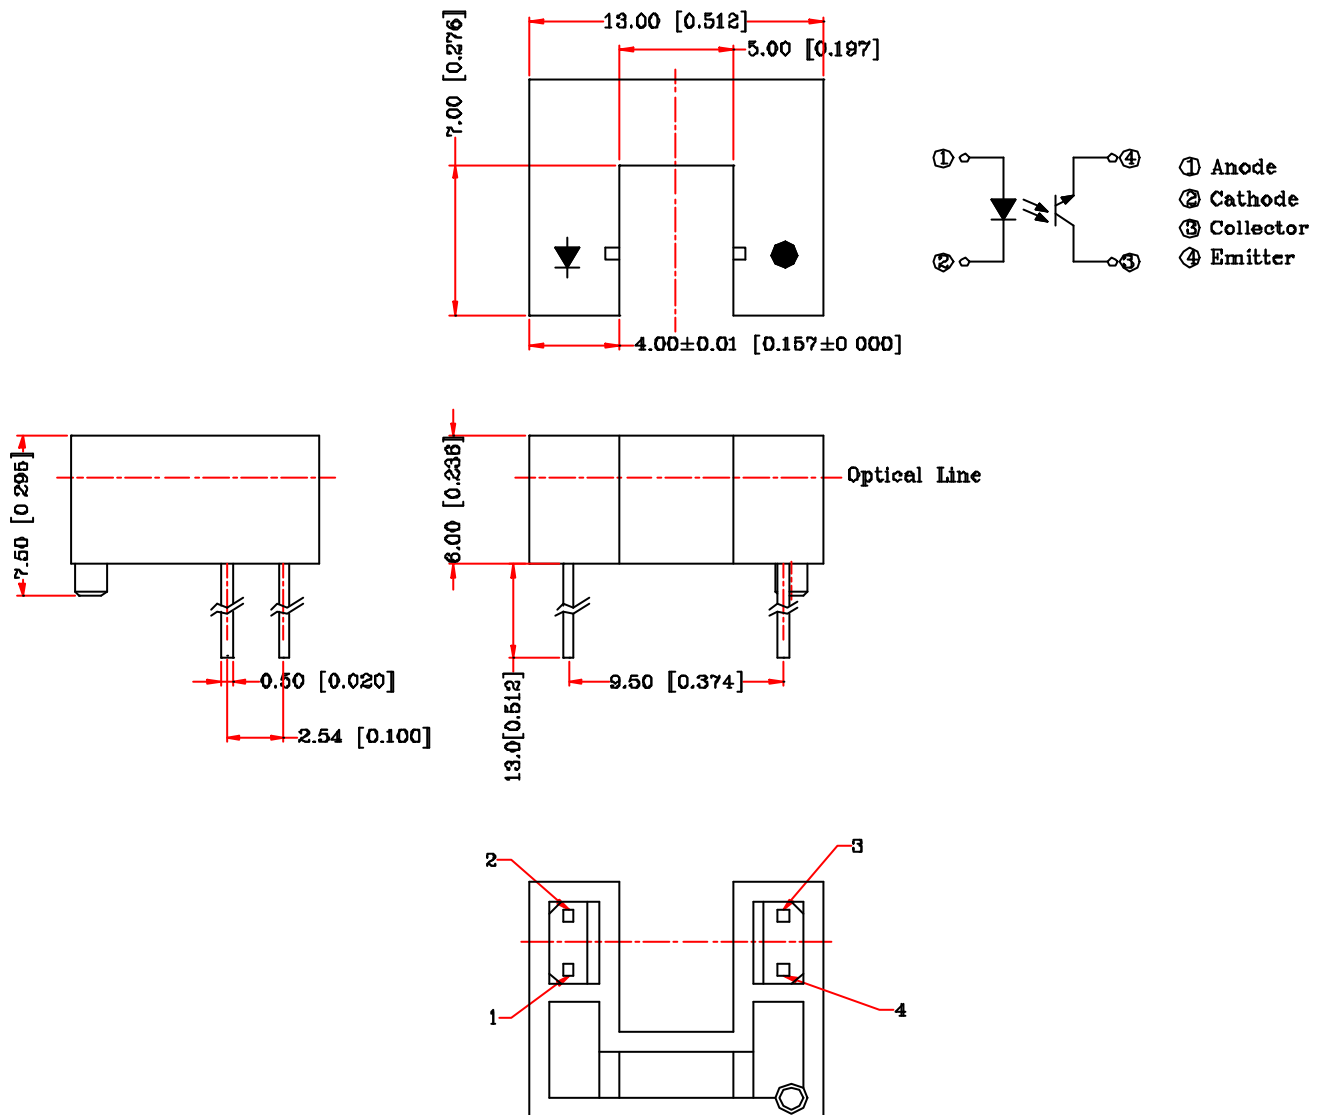

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ unless otherwise specified.
3. Lead spacing is measured where the leads emerge from the package.
4. Specifications are subject to change without notice.

BRIGHT LED ELECTRONICS

[查询"BPI-3C2-03"供应商](#)

- Device Number : BPI-3C2-03
- Typical Electrical / Optical Characteristics Curves ($T_a=25^\circ\text{C}$)

Page: 4
Version: 1.0

Fig.1 Power Dissipation vs. Ambient Temperature

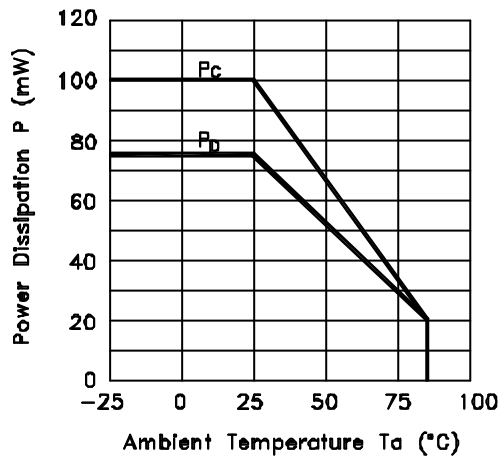


Fig.2 Forward Current vs. Forward Voltage

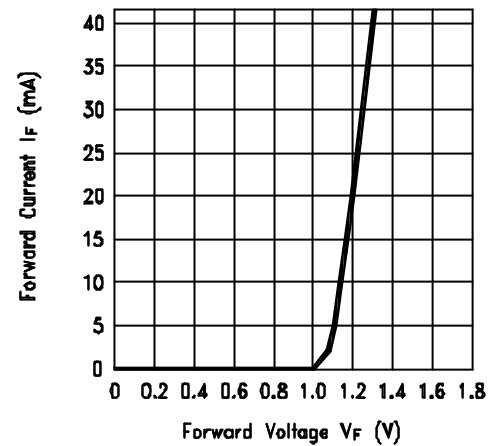


Fig.3 Collector Current vs. Collector-emitter Voltage


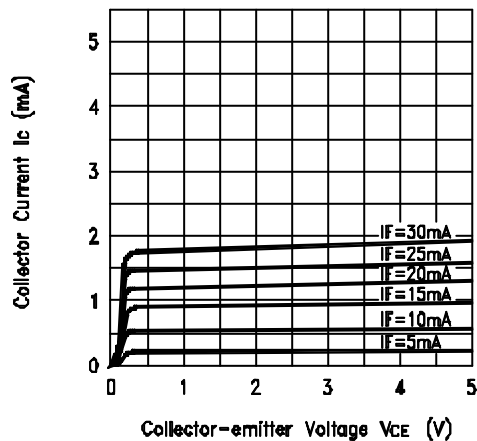


Fig.4 Collector Current vs. Ambient Temperature

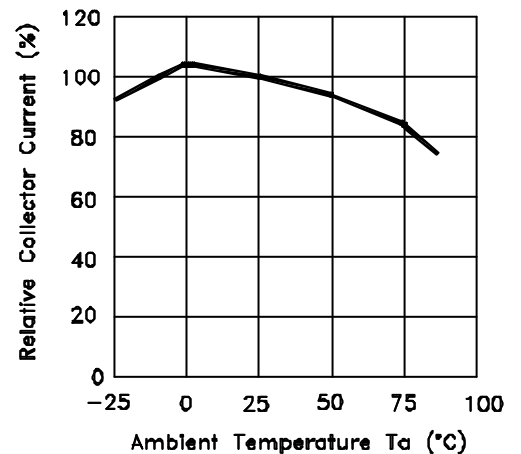

BRIGHT LED ELECTRONICS

[查询"BPI-3C2-03"供应商](#)

- Device Number : BPI-3C2-03
- Typical Electric / Optical Characteristics Curves (Ta=25 °C)

Page: 5
Version: 1.0

Fig.5 Collector-emitter Saturation Voltage vs. Ambient Temperature

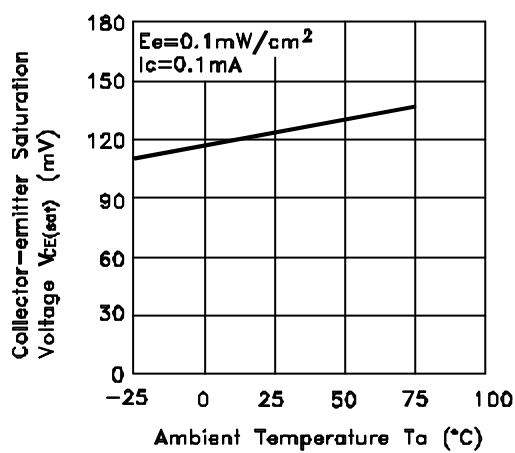


Fig.6 Response Time vs. Load Resistance



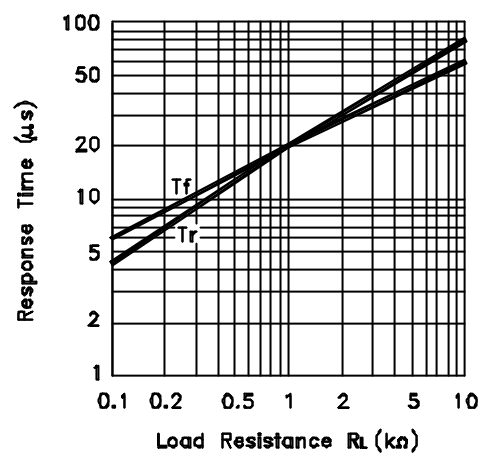



Fig.7 Sensing Position Characteristics (Typical)

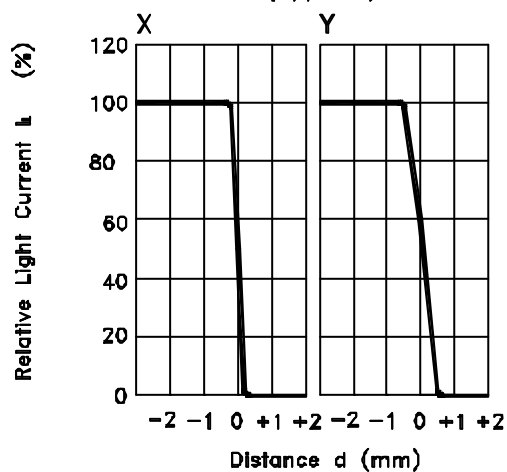

(Center of Optical axis)

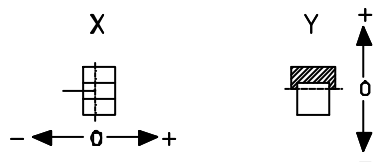


Test Circuit for Response Time

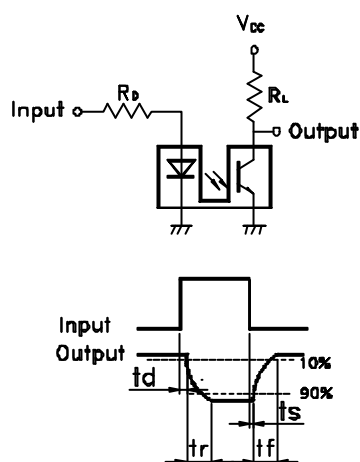


- Device Number : BPI-3C2-03
- Packaging Box Dimensions

Page: 6
Version: 1.1

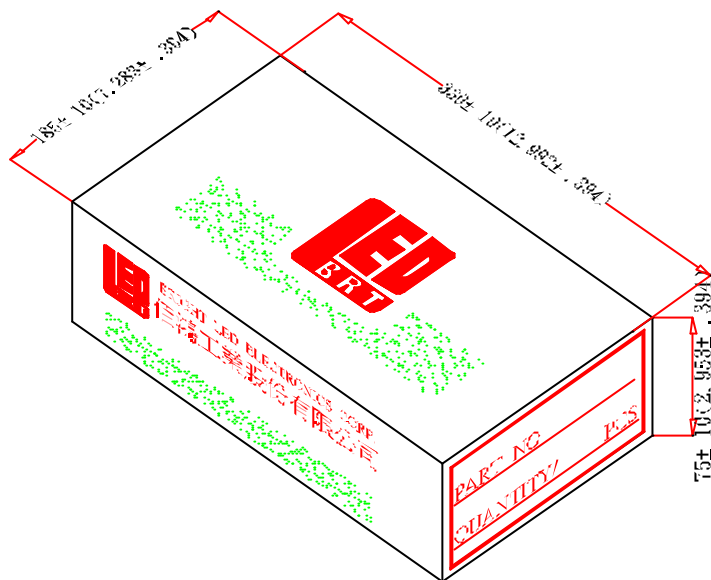

- Packaging Bag Dimensions

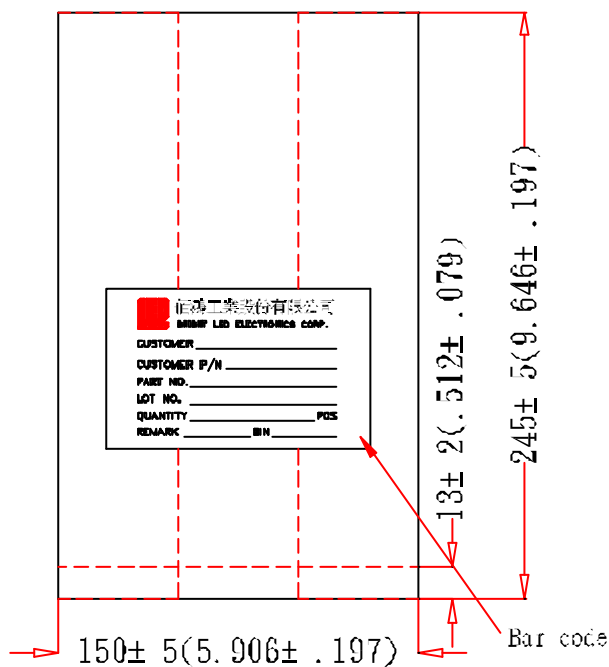

Notes:

1. 500pcs per bag, 2kpcs per box.
2. All Dimensions are in millimeters (inches).
3. Specifications are subject to change without notice.