

## INTRODUCTION

[查询"1121115001"供应商](#)



## Brad® Direct-Link® 750&780 Harsh Duty Unmanaged Switches

1121115

5-Port Modules

1121055

8-Port Modules

Brad Direct-Link switches provide customers with a faster, simpler and more secure Ethernet connection than any other system on the market.

As our world becomes more connected, an increasing number of manufacturers and installers are specifying Ethernet devices for their harsh applications. The Brad family of rugged connectivity products is a leading product line provider of Ethernet infrastructure for Molex.

Protected cabinet Ethernet switch installations away from machinery require long wiring runs, enclosures and glanding. The Molex Direct-Link, harsh-duty, Ethernet switches have been developed to allow customers to convert from traditional in-cabinet to on-machine mounting, moving the switch closer to the machine and thereby reducing cabling.

The Molex Ultra-Lock® system of connectors and cordsets is a major component in the Direct-Link Harsh-Duty Switches line.

Available in 5-port and 8-port versions, the Molex durable switches with push/pull connectors save cabling and reduce installation time and cost compared with existing cabinet installations. They provide easier system maintenance and produce a seal when connected regardless of labour skill. The connections are tested to IP69K ratings to ensure operation through dust, pressure-wash and immersion in water. Mechanical keying and radial seals eliminate the risk for operator error commonly found in other systems.

Slim dimensions are sized to fit standard extrusions for easy mounting. Auto-learning features make each unit truly plug-and-play, suitable for both the novice and expert in network setup.

Operating temperature ratings of -20 to +75°C ensure that networks linked using the harsh-duty switches can run in extreme environments. Coupled with Class 1, Division 2 certification these switches can also be used in Oil and Gas, Mining, and utility applications.




## FEATURES AND BENEFITS

- Ultra-Lock® Connection system - faster, simpler and more secure connections than any other system on the market
- NEMA 6 and IP69K rated environmental protection - withstands dust, pressure-wash and submersion in water
- Class 1 Div 2 rated - suitable for Oil and Gas markets where extremely hazardous gases may be present
- Operating temperature to -20 to +75°C - enables installation in extreme temperature applications
- 30mm and 60mm formats with standard hole patterns - allows use of standard extrusion members and mounting holes for installation
- Auto-learning with no software or configuration required - plug-and-play capabilities and less-skilled labour able to install systems

## MARKETS AND APPLICATIONS

- Industrial Automation
  - Manufacturing cells
  - Plant-floor data networks
- Machine Builders
  - Robots, CNC, packaging machines, textiles, presses
- Entertainment
  - Theme parks, rides
  - Concerts and carnivals
- Signage and advertising
  - Traffic signs, billboards
- Non-Automotive Transportation
  - Railways, subways, marinas



**SPECIFICATIONS**

[查询"1121115001"供应商](#)



**Brad® Direct-Link® 750&780  
Harsh Duty Unmanaged  
Switches**

**1121115 5-Port Modules**  
**1121055 8-Port Modules**

**Characteristics and Performance**

Switch Type: Unmanaged  
(Store and Forward)

Ports: 10BaseT/100BaseTx M12

Latency (10Mb): 16µs + frame time  
Latency(100Mb): 5µs + frame time

Duplex Operation: Full or half  
Mounting: Screw Mount  
Power input: Redundant input terminals  
Input power(max): 2.0W (DRL-75x),  
2.4W (DRL-78x)

Voltage: 9-36VDC (continuous)  
Isolation: 1500 VRMS 1 minute  
Operating temp: -20 to +75°C  
Storage temp: -40 to +85°C  
Humidity: 5 – 95% RH non condensing  
Dimensions: 176 x 30 x 34 (DRL-75x)  
220 x 60 x 37 (DRL-78x)

Weight: 230g (DRL-75x)  
580g (DRL-78x)

EMC immunity: EN61326, EN61000-4-4,  
EN61000-4-5,  
EN61000-4-2;  
8Kv contact/16Kv Air  
(DRL-75x)  
4Kv contact/8Kv Air  
(DRL-78x)

UL: File number - pending

Hazardous Rating: Class 1 Division 2 certification


**References**

Vibration: 7g (IEC68-2-29)

Shock: 50g (IEC68-2-29)

Electrical Safety: EN61010-1 (IEC61010)

EMI emissions: FCC part 15, ICES 003,  
EN55011 Class A (DRL-78x),  
Class B (DRL-750)

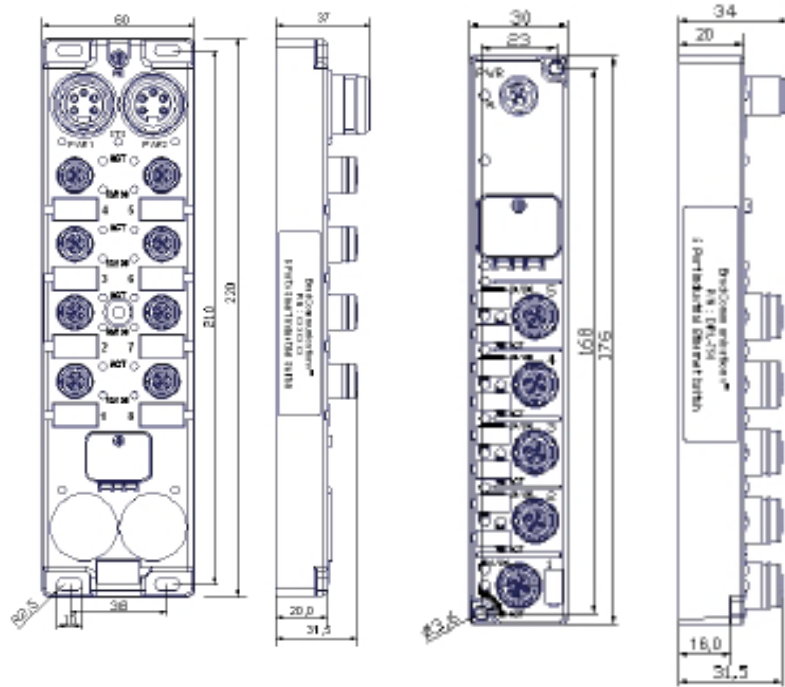

**ORDERING INFORMATION**

Order No.	Material Number	Description	# of Ports	Power	Samples
1121115001	DRL-750	IP67 Fast Ethernet Unmanaged Switch	5	M12	6201
1121055002	DRL-780	IP67 Fast Ethernet Unmanaged Switch	8	Mini-Change® (5-pin)	6201
Coming soon	DRL-781	IP67 Fast Ethernet Unmanaged Switch	8	Mini-Change® (4-pin)	6201

[www.molex.com/link/directlink750-780.html](http://www.molex.com/link/directlink750-780.html)

**America**  
Lisle Illinois 60532 U.S.A.  
+1-800-78MOLEX  
amerinfo@molex.com

**Asia Pacific North**  
Yamato, Kanagawa, Japan  
+84-46-265-2325  
apninfo@molex.com

**Asia Pacific South**  
Jurong, Singapore  
+65-6268-6868  
apsinfo@molex.com

**Europe**  
Walldorf, Germany  
+49 6227-3091-0  
mxgermany@molex.com

**Corporate Headquarters**  
2222 Wellington Ct.  
Lisle, IL 60532 U.S.A.  
+630-969-4550