

# N-CHANNEL ENHANCEMENT MODE VERTICAL DMOS FET


ISSUE 2 - SEPT 93

## FEATURES

- \* 200 Volt  $V_{DS}$
- \*  $R_{DS(on)}=28\Omega$

# BS107PT

咨询"BS107PT"供应商



E-Line  
TO92 Compatible

## ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Drain-Source Voltage	$V_{DS}$	200	V
Continuous Drain Current at $T_{amb}=25^{\circ}C$	$I_D$	0.12	A
Pulsed Drain Current	$I_{DM}$	2	A
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Power Dissipation at $T_{amb}=25^{\circ}C$	$P_{tot}$	500	mW
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^{\circ}C$


## ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}C$ )

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Drain-Source Breakdown Voltage	$BV_{DSS}$	200	230		V	$I_D=100\mu A, V_{GS}=0V$
Gate Body Leakage	$I_{GSS}$			10	nA	$V_{GS}=15V, V_{DS}=0V$
Drain Cut-Off Current	$I_{DSS}$			30	nA	$V_{GS}=0V, V_{DS}=130V$
Drain Cut-Off Current	$I_{DSX}$			1	$\mu A$	$V_{GS}=-0.2V, V_{DS}=70V$
Static Drain-Source on-State Resistance	$R_{DS(on)}$		15	28	$\Omega$	$V_{GS}=2.6V, I_D=20mA^*$
				30	$\Omega$	$V_{GS}=2.7V, I_D=100mA^*$

\* Measured under pulsed conditions. Pulse width=300 $\mu s$ . Duty cycle  $\leq 2\%$

# BS107PT

## TYPICAL CHARACTERISTICS

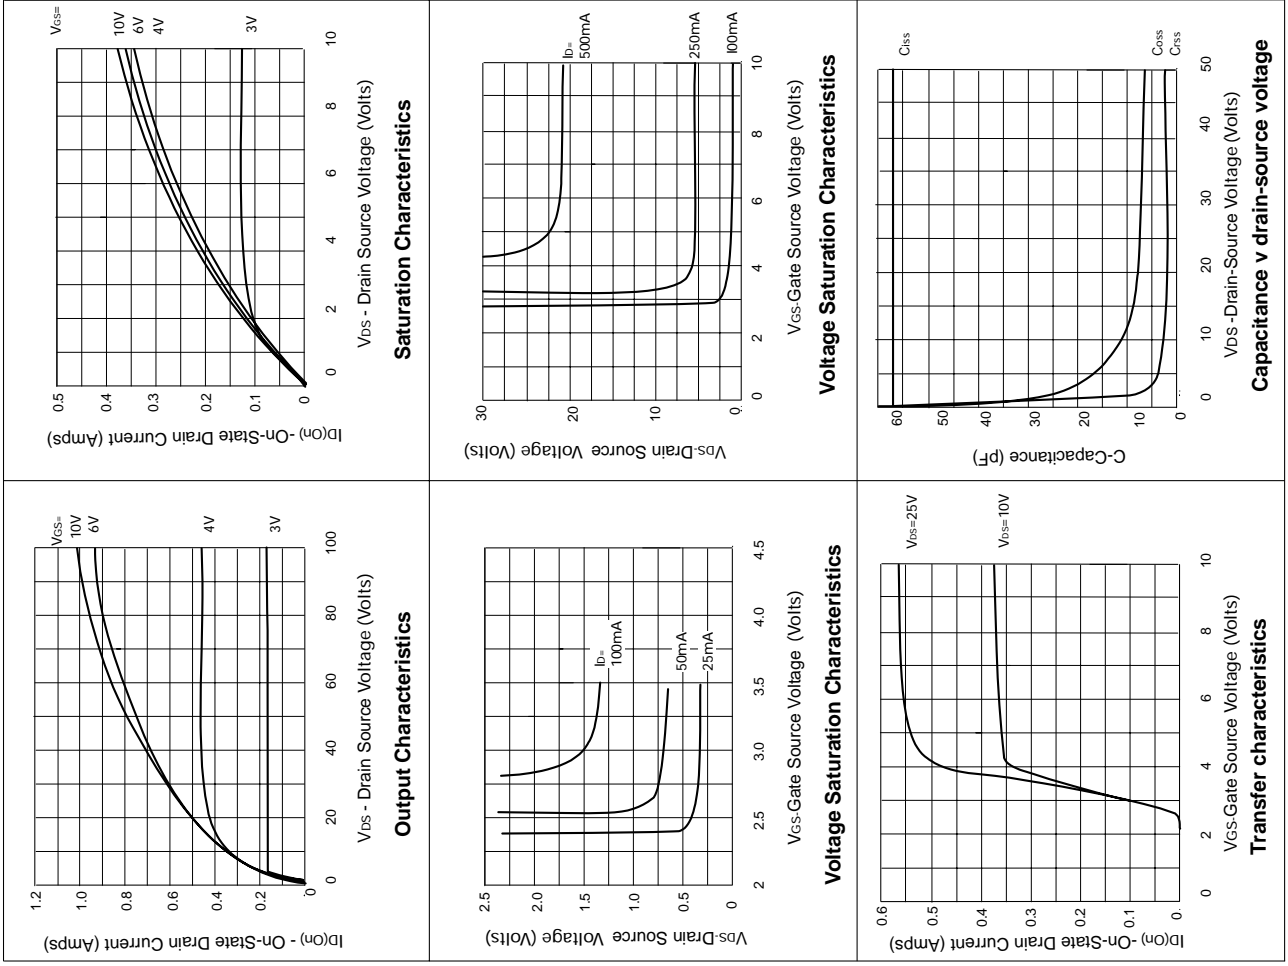

# N-CHANNEL ENHANCEMENT MODE VERTICAL DMOS FET


ISSUE 2 - SEPT 93

## FEATURES

- \* 200 Volt  $V_{DS}$
- \*  $R_{DS(on)}=28\Omega$

# BS107PT

咨询"BS107PT"供应商



E-Line  
TO92 Compatible

## ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Drain-Source Voltage	$V_{DS}$	200	V
Continuous Drain Current at $T_{amb}=25^{\circ}C$	$I_D$	0.12	A
Pulsed Drain Current	$I_{DM}$	2	A
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Power Dissipation at $T_{amb}=25^{\circ}C$	$P_{tot}$	500	mW
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^{\circ}C$


## ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}C$ )

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Drain-Source Breakdown Voltage	$BV_{DSS}$	200	230		V	$I_D=100\mu A, V_{GS}=0V$
Gate Body Leakage	$I_{GSS}$			10	nA	$V_{GS}=15V, V_{DS}=0V$
Drain Cut-Off Current	$I_{DSS}$			30	nA	$V_{GS}=0V, V_{DS}=130V$
Drain Cut-Off Current	$I_{DSX}$			1	$\mu A$	$V_{GS}=-0.2V, V_{DS}=70V$
Static Drain-Source on-State Resistance	$R_{DS(on)}$		15	28	$\Omega$	$V_{GS}=2.6V, I_D=20mA^*$
				30	$\Omega$	$V_{GS}=2.7V, I_D=100mA^*$

\* Measured under pulsed conditions. Pulse width=300 $\mu s$ . Duty cycle  $\leq 2\%$


# BS107PT

## TYPICAL CHARACTERISTICS

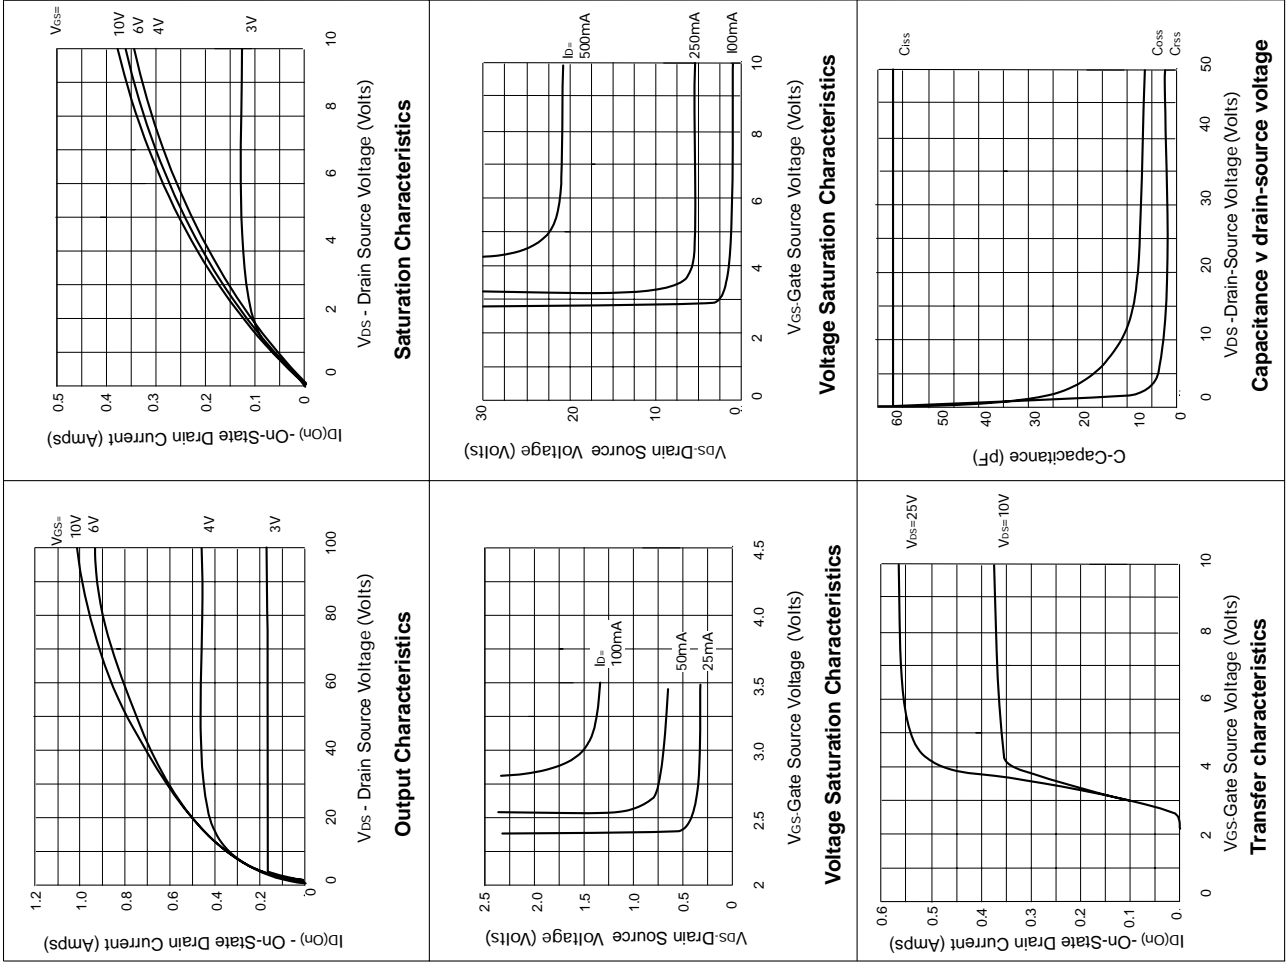


# BS107PT


## TYPICAL CHARACTERISTICS

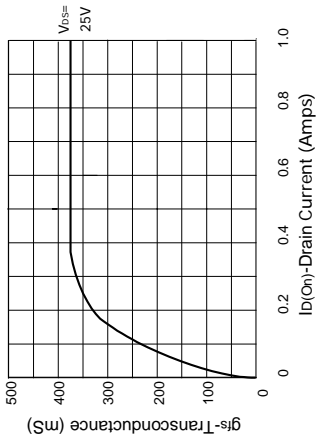


**Transconductance v drain current**

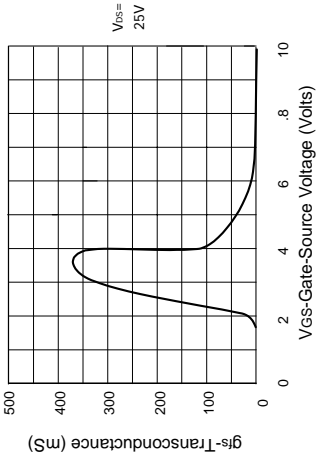


**Transconductance v gate-source voltage**

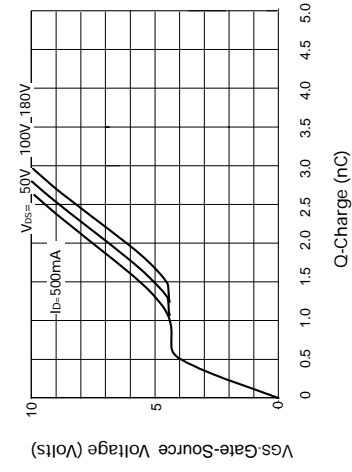


**Gate charge v gate-source voltage**

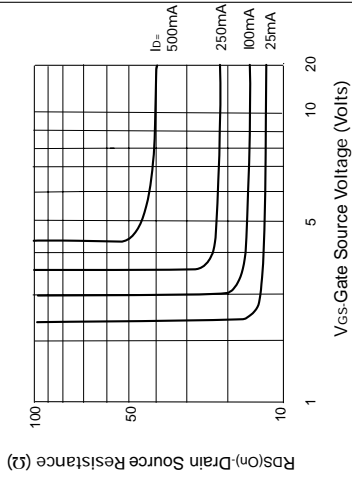

**Gate charge v gate-source voltage**

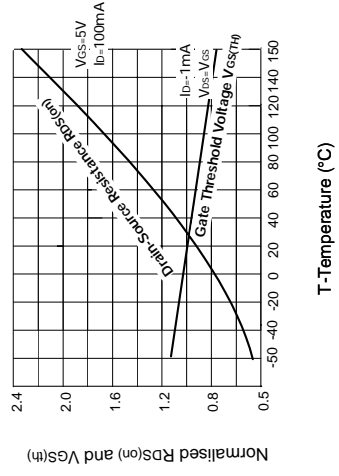

**Normalised RDS(on) and VGS(th) v Temperature**

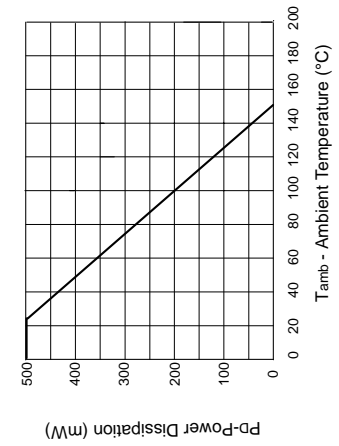

**Power v temperature derating curve**