

# 5-6 WATT 2:1 WIDE INPUT RANGE DC/DC POWER MODULES

Remote ON/OFF Option (Rectangle Package)

## FEATURES

- 5.0 to 6.0 Watt Isolated Output
- 2:1 Wide Input Range
- High Conversion Efficiency
- Continuous Short Circuit Protection
- Remote ON/OFF Option \*

## GENERAL SPECIFICATIONS

- Efficiency ..... Per Table
- Switching Frequency ..... 100KHz Min.
- Isolation Voltage: ..... 500 Vdc Min.
- Operating Temperature ..... -25 to +75°C  
Derate Linearly to no load @ 100°C max.
- Case Material:  
500Vdc.....Non-Conductive Black Plastic  
1.5kVdc & 3kVdc.....Black coated copper  
with non-conductive base
- EMI/RFI..... Conductive EMI meet  
EN55022 Class B

## INPUT SPECIFICATIONS

- Voltage .....12, 24, 48 Vdc
- Voltage Range .....9-18, 18-36 & 36-72Vdc
- Input Filter ..... Pi Type


## OUTPUT SPECIFICATIONS

- Voltage ..... Per Table
- Initial Voltage Accuracy .....  $\pm 2\%$  Max
- Voltage Stability .....  $\pm 0.05\%$  max
- Ripple&Noise ..3.3&5/12&15...100/150mV p-p
- Load Regulation (10 to 100% Load)  
Single Output Units:  $\pm 0.5\%$   
Dual Output Units:  $\pm 1.0\%$
- Line Regulation .....  $\pm 0.5\%$  typ.
- Temp Coefficient .....  $\pm 0.05\%$  /°C
- Short Circuit Protection ..... Continuous

## PACKAGE

## PIN ASSIGNMENTS

### PHYSICAL DIMENSIONS DIMENSIONS IN inches (mm)

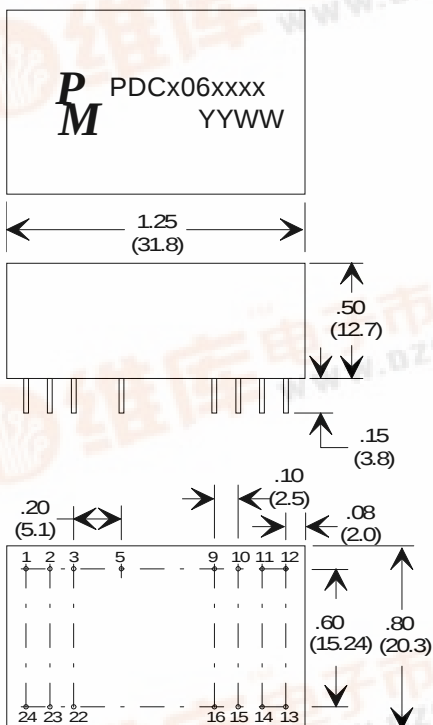

Note: Pin size is 0.02" Inch (0.5mm) DIA or 0.02x0.014 Inch

### REMOTE ON/OFF CONTROL

|                       |                            |
|-----------------------|----------------------------|
| Logic                 | CMOS or Open Collector TTL |
| Ec-On                 | >+5.5VDC or Open Circuit   |
| Ec-Off                | <1.8VDC                    |
| Shutdown Idle Current | 10mA                       |
| Input Resistance      | 100K Ohm                   |
| Control Common        | Referenced to Input Minus  |

| 500VDC |               |              | 1500VDC & 3000VDC |               |              |
|--------|---------------|--------------|-------------------|---------------|--------------|
| PIN #  | SINGLE OUTPUT | DUAL OUTPUTS | PIN #             | SINGLE OUTPUT | DUAL OUTPUTS |
| 1      | + INPUT       | +INPUT       | 1                 | NP            | NP           |
| 2      | NC            | -OUTPUT      | 2                 | -INPUT        | -INPUT       |
| 3      | NC            | COMMON       | 3                 | -INPUT        | -INPUT       |
| 5      | NP            | NP           | 5                 | NP            | R(ON/OFF)    |
| 9      | NP            | NP           | 9                 | NC            | COMMON       |
| 10     | -OUTPUT       | COMMON       | 10                | NC            | NC           |
| 11     | +OUTPUT       | +OUTPUT      | 11                | NC            | -OUTPUT      |
| 12     | -INPUT        | -INPUT       | 12                | NP            | NP           |
| 13     | -INPUT        | -INPUT       | 13                | NP            | NP           |
| 14     | +OUTPUT       | +OUTPUT      | 14                | +OUTPUT       | +OUTPUT      |
| 15     | -OUTPUT       | COMMON       | 15                | NC            | NC           |
| 16     | NP            | NP           | 16                | -OUTPUT       | COMMON       |
| 22     | NC            | COMMON       | 22                | +INPUT        | +INPUT       |
| 23     | NC            | -OUTPUT      | 23                | +INPUT        | +INPUT       |
| 24     | +INPUT        | +INPUT       | 24                | NP            | NP           |

\*NP-NO PIN

\*NC-NO CONNECTION WITH PIN

Specifications subject to change without notice.

PDCx0603x 02/01

20381 BARENTS SEA CIRCLE, LAKE FOREST, CA 92630 • TEL: (949) 452-0511 • FAX: (949) 452-0512 • <http://www.premiermag.com>

# 5-6 WATT 2:1 WIDE INPUT RANGE DC/DC POWER MODULES

## Remote ON/OFF Option (Rectangle Package)

**ELECTRICAL SPECIFICATIONS AT 25°C - OPERATING TEMPERATURE RANGE -25°C TO +75°C**

| PART<br>NUMBER<br>(Note #1) | Premier Magnetics<br>Old Part #<br>(Note #2) | INPUT VOLTAGE |       | OUTPUT<br>VOLTAGE<br>(Vdc) | OUTPUT<br>CURRENT<br>(mAdc) | INPUT<br>CURRENT |                 | TYPICAL<br>EFFICIENCY |
|-----------------------------|----------------------------------------------|---------------|-------|----------------------------|-----------------------------|------------------|-----------------|-----------------------|
|                             |                                              | NOMINAL       | RANGE |                            |                             | NO LOAD<br>mA    | FULL LOAD<br>mA |                       |
| PDCS06031                   | E2AS1203NX                                   | 12            | 9-18  | 3.3                        | 1000                        | 7.5              | 405             | 68 %                  |
| PDCS06032                   | E2AS1205NX                                   | 12            | 9-18  | 5                          | 1000                        | 7.5              | 545             | 76 %                  |
| PDCS06033                   | E2AS1212NX                                   | 12            | 9-18  | 12                         | 470                         | 7.5              | 585             | 80 %                  |
| PDCS06034                   | E2AS1215NX                                   | 12            | 9-18  | 15                         | 400                         | 7.5              | 625             | 80 %                  |
| PDCD06032                   | E2AD1205NX                                   | 12            | 9-18  | ±5                         | ±500                        | 12               | 545             | 76 %                  |
| PDCD06033                   | E2AD1212NX                                   | 12            | 9-18  | ±12                        | ±230                        | 12               | 575             | 80 %                  |
| PDCD06034                   | E2AD1215NX                                   | 12            | 9-18  | ±15                        | ±190                        | 12               | 590             | 80 %                  |
| PDCS06041                   | E2AS2403NX                                   | 24            | 18-36 | 3.3                        | 1000                        | 5                | 195             | 70 %                  |
| PDCS06042                   | E2AS2405NX                                   | 24            | 18-36 | 5                          | 1000                        | 5                | 265             | 78 %                  |
| PDCS06043                   | E2AS2412NX                                   | 24            | 18-36 | 12                         | 470                         | 5                | 285             | 82 %                  |
| PDCS06044                   | E2AS2415NX                                   | 24            | 18-36 | 15                         | 400                         | 5                | 305             | 82 %                  |
| PDCD06042                   | E2AD2405NX                                   | 24            | 18-36 | ±5                         | ±500                        | 7.5              | 265             | 78 %                  |
| PDCD06043                   | E2AD2412NX                                   | 24            | 18-36 | ±12                        | ±230                        | 7.5              | 285             | 81 %                  |
| PDCD06044                   | E2AD2415NX                                   | 24            | 18-36 | ±15                        | ±190                        | 7.5              | 295             | 81 %                  |
| PDCS06051                   | E2AS4803NX                                   | 48            | 36-72 | 3.3                        | 1000                        | 2                | 98              | 70 %                  |
| PDCS06052                   | E2AS4805NX                                   | 48            | 36-72 | 5                          | 1000                        | 2                | 133             | 78 %                  |
| PDCS06053                   | E2AS4812NX                                   | 48            | 36-72 | 12                         | 470                         | 2                | 145             | 81 %                  |
| PDCS06054                   | E2AS4815NX                                   | 48            | 36-72 | 15                         | 400                         | 2                | 154             | 81 %                  |
| PDCD06052                   | E2AD4805NX                                   | 48            | 36-72 | ±5                         | ±500                        | 3                | 265             | 78 %                  |
| PDCD06053                   | E2AD4812NX                                   | 48            | 36-72 | ±12                        | ±230                        | 3                | 142             | 81 %                  |
| PDCD06054                   | E2AD4815NX                                   | 48            | 36-72 | ±15                        | ±190                        | 3                | 147             | 81 %                  |

### NOTE #1:

**PDCx06xxx\_** : FOR STANDARD PART WITH ISOLATION = 500VDC

**PDCx06xxxK** : ADD "K" FOR PART WITH ISOLATION = 1500VDC

**PDCx06xxxQ** : ADD "Q" FOR PART WITH ISOLATION = 3000VDC

**PDCx06xxxR** : ADD "R" FOR PART WITH ISOLATION = 3000VDC AND REMOTE ON/OFF

### NOTE #2: (FOR PREMIER MAGNETICS OLD PART #)

**E2AXXXXXNX** : FOR STANDARD PART WITH ISOLATION = 500VDC

**E2AXXXXXNM** : FOR PART WITH ISOLATION = 1500VDC

**E2AXXXXXNT** : FOR PART WITH ISOLATION = 3000VDC

**E2AXXXXXTR** : FOR PART WITH ISOLATION = 3000VDC AND REMOTE ON/OFF