


## Model 6551 Microline Passive Oscilloscope Probe w/RO



**Model 6551**  
**Microline Passive Oscilloscope Probe with Readout**  
**Actuator**

### Accessories included with Probe:

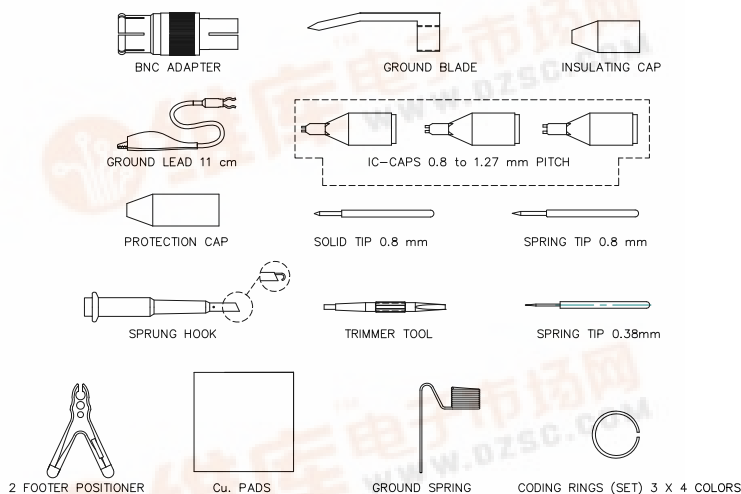

### Features

- This probe is recommended for high performance probing applications and is adjustable for low and high frequencies.
- The probe's entire core is made of a high quality ceramic hybrid.
- Pure coaxial design and laser trimmed resistors ensure highest signal fidelity along the signal path offering high bandwidth and fast risetimes for accurate impulse measurements.
- Probe tips are interchangeable and can be replaced easily.
- Accessories (one of each) included with Probe are:
  - BNC Adapter
  - Ground Blade
  - Ground Spring
  - Ground Lead with Alligator Clip 11 cm (4.33")
  - IC Caps: 0.8mm, 1.0mm, and 1.27mm pitch
  - Insulating Cap
  - Protection Cap
  - Solid Tip 0.8mm (0.0315")
  - Spring Tips 0.8mm (0.0315") & 0.38mm (0.015")
  - Sprung Hook
  - Trimmer Tool
  - 2 Footer Positioner
  - Coding Rings (Set) 3 X 4 colors
  - Copper (Cu) Pads

- Our passive probes are spring loaded, with needle sharp tips to support precise and safe measurements.

### Specifications

<b>Attenuation Ratio</b>	10:1
<b>Maximum Input Voltage CAT II<sup>1</sup></b>	300 Vrms
<b>Scope Bandwidth MHz</b>	500
<b>System Bandwidth MHz (-3 dB)</b>	500
<b>System Rise time (ns)</b>	< 0.7
<b>Probe Input Resistance (MΩ)</b>	10
<b>Probe Input Capacitance (pF)</b>	< 11
<b>Compensation Range (pF)</b>	10 - 20
<b>Readout Actuator<sup>2</sup></b>	Yes
<b>Cable Length</b>	4 ft. (1.2 m)

<sup>1</sup> Rating: Per IEC 61010-031. Maximum voltage allowed on the low or ground connection including shell and housing must not exceed 30 V.

<sup>2</sup> Any oscilloscope that uses the Tektronix® style range actuator.

### Ordering Information

Model: 6551  
500 MHz 0-Scope Probe w/RA

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

USA: Sales: 800-490-2361  
Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 International: 425-446-5500  
Where to Buy: [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

