


# Silicon Controlled Rectifier/Inverter Series 035

查询"03508GWF"供应商

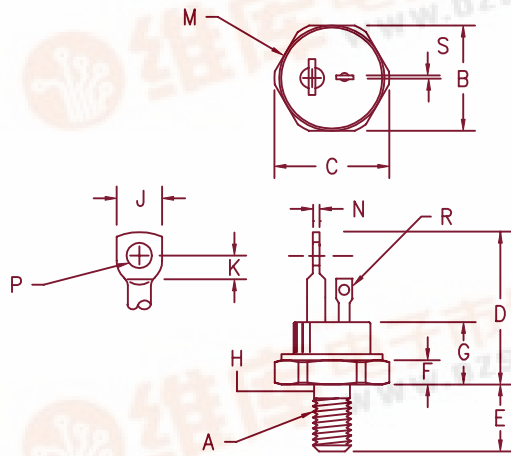

Note 1: 1/4-28 UNF-3A  
Note 2: Full thread within 2 1/2 threads

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	---	---	---	---	1
B	.677	.685	17.20	17.40	
C	---	.770	---	19.56	
D	1.200	1.250	30.48	31.75	
E	.427	.447	10.84	11.35	
F	.115	.155	2.92	3.94	
G	---	.515	---	13.08	
H	---	.249	---	6.32	2
J	.200	.300	5.08	7.62	
K	.120	---	3.05	---	
M	---	.667	---	16.94	Dia.
N	.065	.085	1.65	2.15	
P	.145	.155	3.68	3.93	Dia.
R	.055	.065	1.40	1.65	Dia.
S	.025	.030	.64	.76	

## TO-208AC (TO-65)

Microsemi  
Catalog Number

03508G(2)F  
03510G(2)F  
03512G(2)F

Note 1: To specify dv/dt other than 200V/usec., enter appropriate letter in place of "G": K 300V/usec.

H 500V/usec.  
Note 2: To specify tq, enter appropriate letter in (2)  
W-30 usec  
X-40 usec

Forward & Reverse  
Repetitive Blocking  
VDRM, VRRM

800V  
1000V  
1200V

- dv/dt-200 V/usec
- 1000 amperes surge current
- Low forward on-state voltage
- Blocking voltages up to 1200 volts
- Primarily for forced commutated applications

### Electrical Characteristics

Max. RMS on-state current	$I_T(\text{RMS})$ 63 Amps	$T_C = 100^\circ\text{C}$ , half sine wave, $R_{\theta\text{JC}} = 0.35^\circ\text{C/W}$
Max. average on-state cur.	$I_T(\text{AV})$ 40 Amps	$T_C = 100^\circ\text{C}$ , half sine wave, $R_{\theta\text{JC}} = 0.35^\circ\text{C/W}$
Max. peak on-state voltage	$V_{\text{TM}}$ 2.8 Volts	$I_{\text{TM}} = 120 \text{ A(peak)}$
Max. holding current	$I_{\text{H}}$ 500 mA	
Max. peak one cycle surge current	$I_{\text{TSM}}$ 800 A	$T_C = 100^\circ\text{C}$ , 60Hz
Max. $I^2t$ capability for fusing	$I^2t$ 2650A <sup>2</sup> S	$t = 8.3 \text{ ms}$

$T_C = 25^\circ\text{C}$  unless otherwise noted

### Thermal and Mechanical Characteristics

Operating junction temp range	$T_J$	-65°C to 125°C
Storage temperature range	$T_{\text{STG}}$	-65°C to 150°C
Maximum thermal resistance	$R_{\theta\text{JC}}$	0.35°C/W Junction to case
Typical thermal resistance (greased)	$R_{\theta\text{CS}}$	0.20°C/W Case to sink
Mounting torque		25-30 inch pounds
Weight		0.56 ounces (16 grams) typical

12-14-00 Rev. IR



COLORADO

**Microsemi**

800 Hoyt Street  
Broomfield, CO. 80020  
PH: (303) 469-2161  
FAX: (303) 466-3775  
www.microsemi.com

## Switching

Critical rate of rise of on-state current (note 1)	$di/dt$	200A/usec.	$T_J = 125^\circ\text{C}$
Typical delay time (note 1)	$t_d$	2.0 usec.	
Maximum circuit commuted turn-off time (note 2)	$t_q (W)$	30 usec.	$T_J = 125^\circ\text{C}$
	$t_q (X)$	40 usec.	$T_J = 125^\circ\text{C}$

Note 1:  $I_{TM} = 50\text{A}$ ,  $V_D = V_{DRM}$ ,  $V_{GT} = 12\text{V}$  open circuit, 20 ohm-0.1 usec. rise time  
 Note 2:  $I_{TM} = 50\text{A}$ ,  $di/dt = -5\text{A/usec.}$ ,  $V_R$  during turn-off interval = 50V min.,  
 reapplied  $dv/dt = 20\text{V/usec.}$ ,  $V_{GT} = 0\text{V}$

## Triggering

Max. gate voltage to trigger	$V_{GT}$	2.0V	$T_J = 25^\circ\text{C}$
Max. nontriggering gate voltage	$V_{GD}$	0.15V	$T_J = 125^\circ\text{C}$
Max. gate current to trigger	$I_{GT}$	150mA	$T_J = 25^\circ\text{C}$
Max. peak gate power	$P_{GM}$	10W	
Average gate power	$P_{G(AV)}$	2.0W	$t_p = 10 \text{ usec.}$
Max. peak gate current	$I_{GM}$	3.0A	
Max. peak gate voltage (forward)	$V_{GM}$	20V	
Max. peak gate voltage (reverse)	$V_{GM}$	10V	

## Blocking

Max. leakage current	$I_{RRM}, I_{DRM}$	20mA	$T_J = 125^\circ\text{C} \ \& \ V_{DRM}, V_{RRM}$
Max. reverse leakage	$I_{RRM}, I_{DRM}$	500 $\mu\text{A}$	$T_J = 25^\circ\text{C} \ \& \ V_{RRM}, V_{RRM}$
Critical rate of rise of off-state voltage	$dv/dt$	200V/usec.	$T_J = 125^\circ\text{C}$

Figure 1  
Typical Forward On-State Characteristics

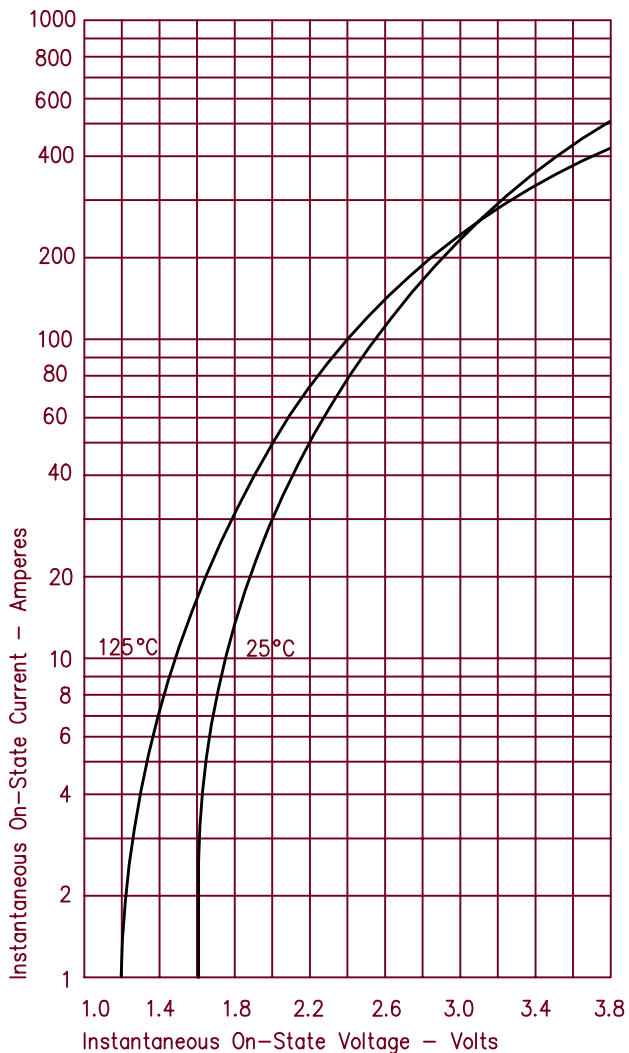


Figure 3  
Maximum Power Dissipation

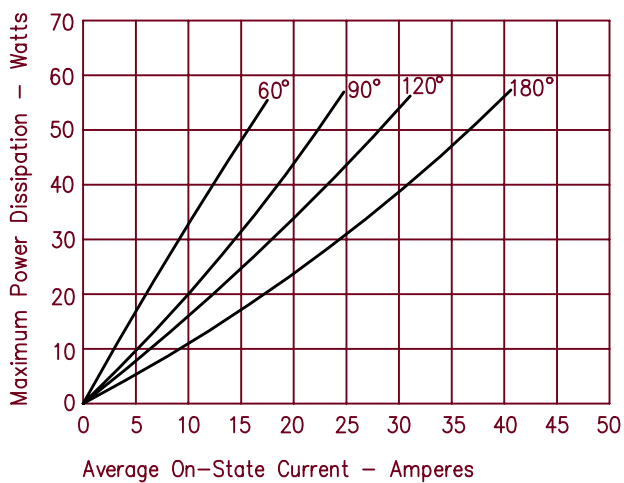


Figure 4  
Transient Thermal Impedance

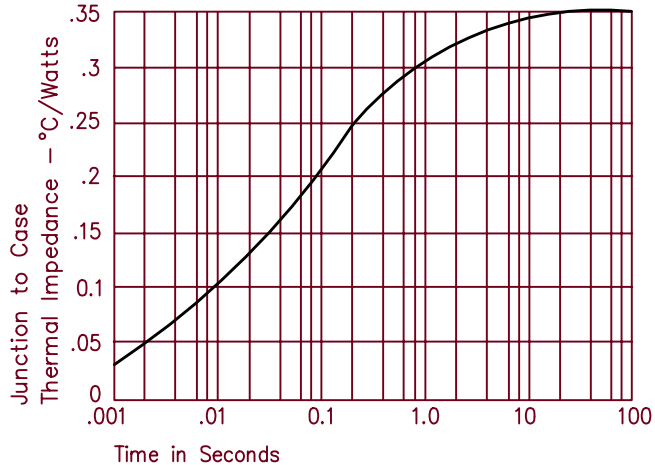


Figure 2  
Forward Current Derating

