


# **Model 4995** CE **Binding Post, Spring** Loaded, Per MIL-P-55149/8

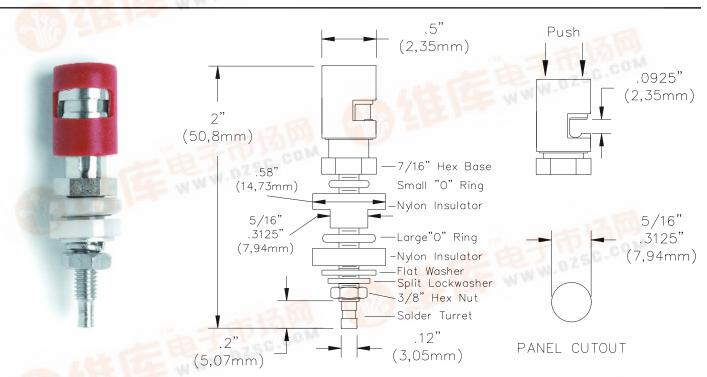

## **FEATURES:**

- Spring-loaded cap captures wire securely for fast connection and release.
- Mounts in panels from .062" (1.57mm) to .125" (3.18mm) thick.
- Accepts wire size up to .0925" (2,35mm) diameter.
- Complies with MIL-P-55149/8.

## **MATERIALS:**

Body: Nickel Plated Brass "O" Rings: Silicon Rubber

Cap: Silicon Rubber, Red or Black over body

Hardware: Hex Nut, Split Lockwasher, Brass Washer, Nylon Washer, "O" Rings, Body, Cap

# **RATINGS:**

Voltage: Hands free usage in controlled voltage environments: 1200 Vrms Max. For CE compliance: not intended for WWW.DZSC.GOM

hand-held use at voltage above 33 Vrms/70 Vdc.

Current: 15 Amperes

Temperature: +239°F (+115°C) Max.

## **ORDERING INFORMATION:**

Model 4995-0 (Black) Model 4995-2 (Red)

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technical support@pomonatest.com) For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com