

查询"SMQ-C12"供应商

90° HYBRID SURFACE MOUNT MODEL: SMQ-C12

OPTIMIZED BANDWIDTH

127.72 MHz

FEATURES:


- ▶ Excellent Performance
- ▶ Ultra Wide Bandwidth
- ▶ Building Block For:
 - Power Amplifier
 - Image Rejection Mixers
 - I & Q / SSB Modulators
 - Phase Shifters & More...



SPECIFICATIONS (Rev. A 09/28/06)

Frequency	127.72 MHz	
Insertion Loss (dB)	Typ.	Max.
	0.2	0.4
Amplitude Unbalance	0.2 dB (Max.)	
Phase Unbalance	2° (Max.)	
Isolation (dB)	Typ.	Min.
	20	17
Power Rating	100 mW (Max.)	
Impedance	50 Ohms (Nom.)	
VSWR	1.3:1 (Typ.)	
Operating Temperature Range	-30 to +85 °C	

Package #	129
-----------	-----

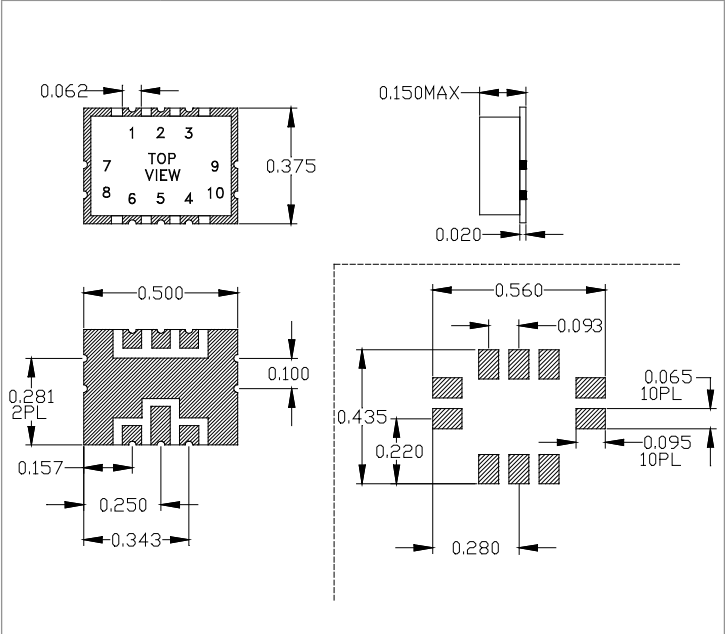

Pin-Out				
Input	Isolated*	+90° Output	0° Output	GND.
1	4	6	3	All Others

* Terminate ISOLATED port in 50 Ohms EXTERNALLY





[查询"SMQ-C12"供应商](#)

90° HYBRID SURFACE MOUNT MODEL: SMQ-C12

OPTIMIZED BANDWIDTH

127.72 MHz

Data @ 25°C

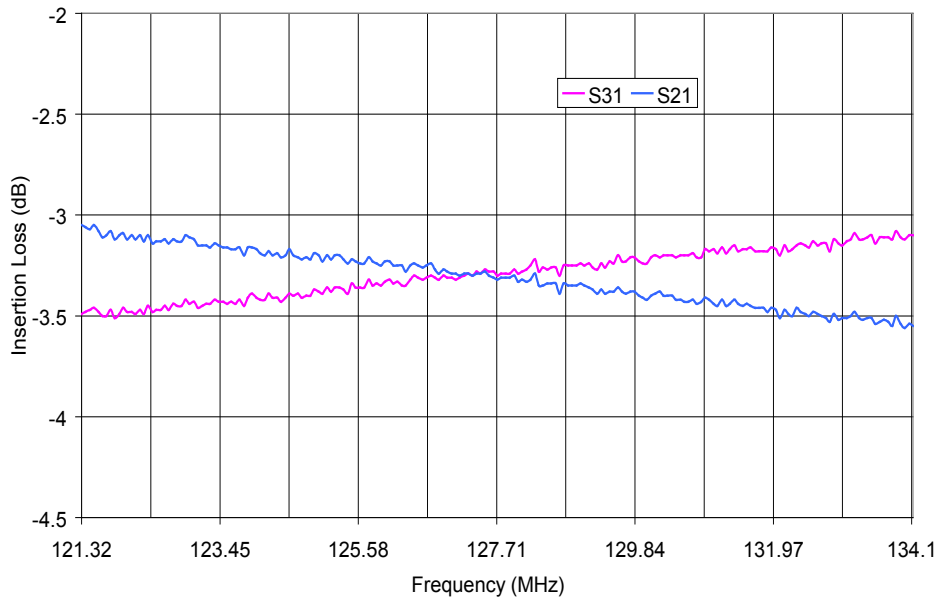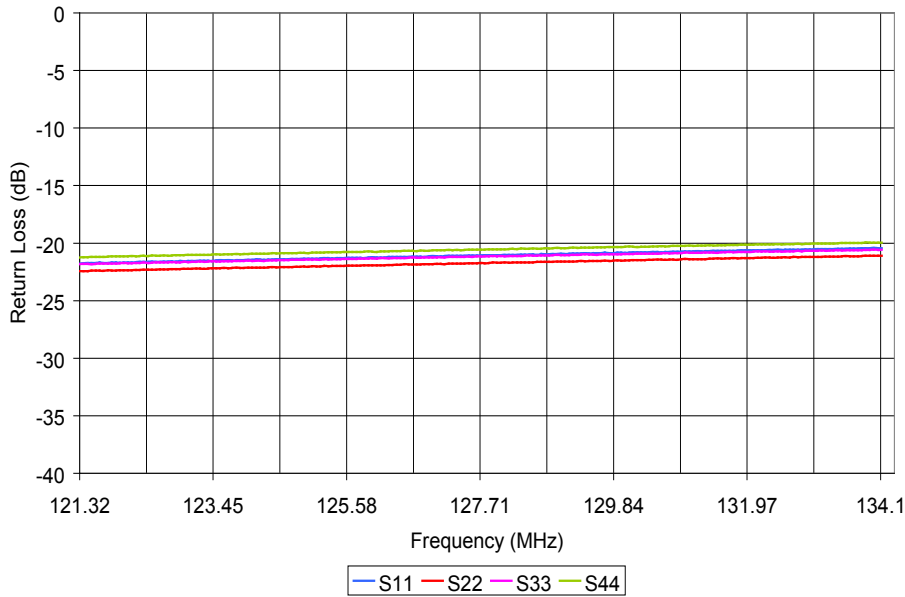

PERFORMANCE PLOTS



[查询"SMQ-C12"供应商](#)

90° HYBRID SURFACE MOUNT MODEL: SMQ-C12

OPTIMIZED BANDWIDTH

127.72 MHz

Data @ 25°C

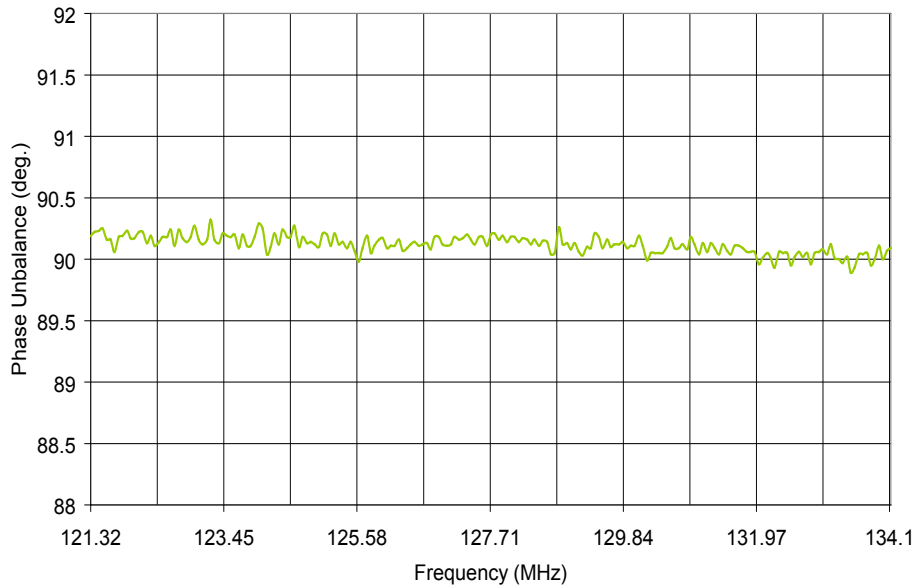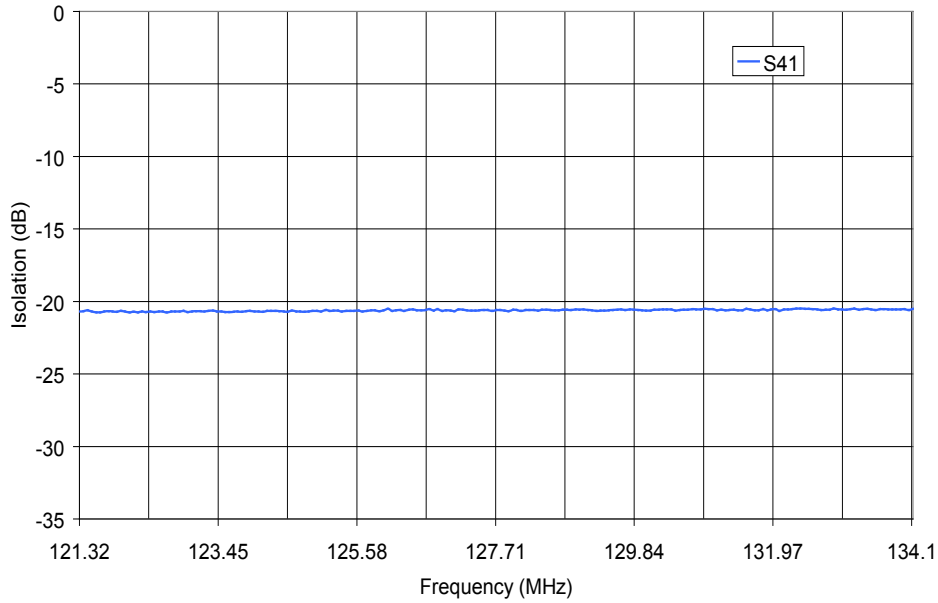

PERFORMANCE PLOTS


[查询"SMQ-C12"供应商](#)

90° HYBRID SURFACE MOUNT MODEL: SMQ-C12

OPTIMIZED BANDWIDTH

127.72 MHz

Data @ 25°C

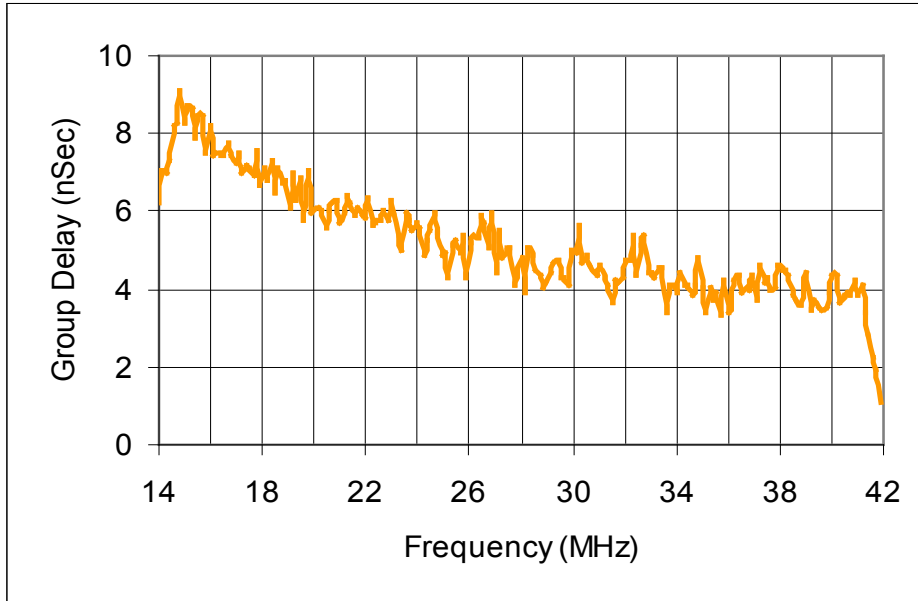

PERFORMANCE PLOTS