
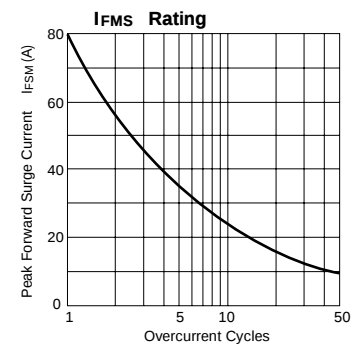
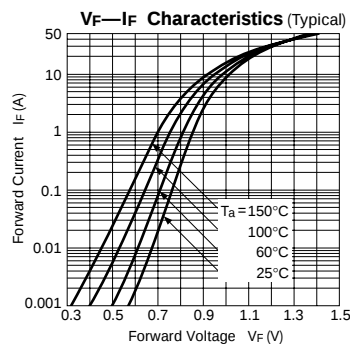


Rectifier Diodes




查询"EM2"供应商

Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)					Others					
	V _{RM} (V)	I _F (AV) (A)	I _{FSM} (A)	T _J (°C)	Tstg (°C)	V _F (V)		I _R (μA)	I _R (H) (μA)	Rth (j-ℓ)	Mass	Fig.				
			50Hz Half-cycle Sinewave Single Shot					I _F (A)	V _R =V _{RM} max	V _R =V _{RM} Ta=100°C max	(°C/W)		(g)			
EM 2	400	1.2	80	-40 to +150		0.92	1.2	10	50	17	0.3	Ⓐ				
EM 2A	600															
EM 2B	800															
RM 1Z	200	1.0	50			0.95	1.0	5	50	15	0.4	Ⓑ				
RM 1	400															
RM 1A	600															
RM 1B	800	0.8	40			1.2										
RM 1C	1000															
RM 11A	600	1.2	100			0.92	1.5	10								
RM 11B	800															
RM 11C	1000															




EM 2 series



RM 1 series

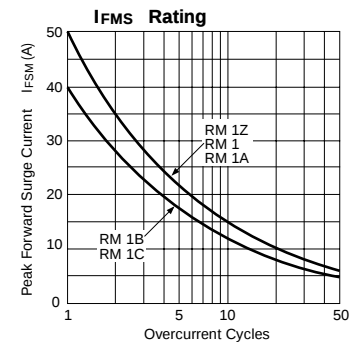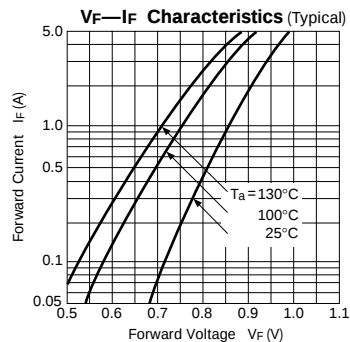

RM 11 series

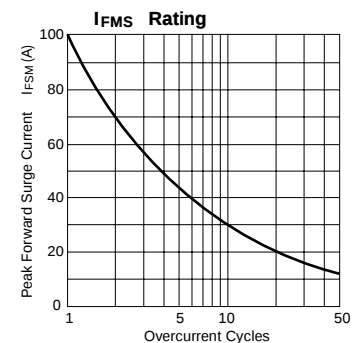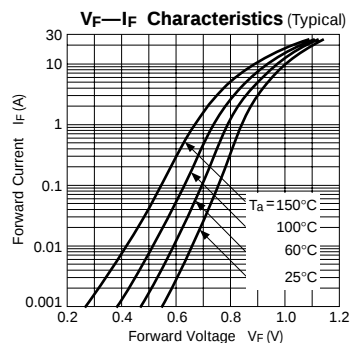

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

