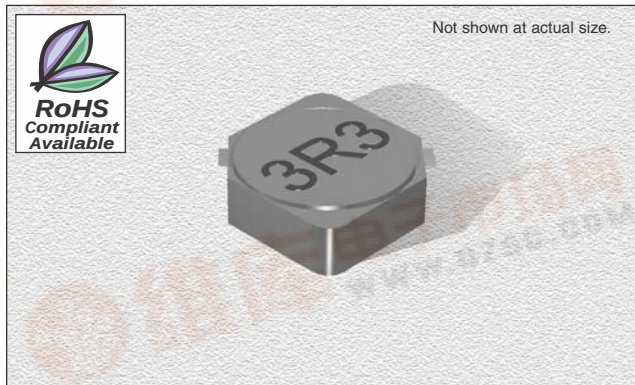


查询"CTCDRH6D38F-6R2N"供应商

CTCDRH6D38 Series

From 3.3 μH to 100 μH 

CHARACTERISTICS

Description: SMD (shielded) power inductor**Applications:** Power supplies for VTR, OA equipment, LCD televisions, PC notebooks, portable communication equipment, DC/DC converters, etc.**Operating Temperature:** -30°C to +110°C**Inductance Tolerance:** $\pm 30\%$ **Testing:** Tested on a HP4284A at 10 KHz, 0.25Vrms, 0Adc**Packaging:** Tape & Reel**Marking:** Parts are marked with inductance code**Rated DC Current:** Indicates the current when the inductance decreases to 65% of its initial value or D.C. current when the temperature of coil is increased by 30% the smaller one is defined as rated current.**Miscellaneous:** RoHS Compliant available**Additional Information:** Additional electrical & physical information available upon request**Samples available. See website for ordering information.**

SPECIFICATIONS


Parts are available in $\pm 30\%$ tolerance only.

CTCDRH6D38F Please specify "F" for RoHS Compliant


Part Number	Inductance ($\mu\text{H} \pm 30\%$)	L Test Freq. (kHz)	DCR Max. (m Ω)	Rated DC Current (A)
CTCDRH6D38_-3R3N	3.3	10	20	3.5
CTCDRH6D38_-5R0N	5.0	10	24	2.9
CTCDRH6D38_-6R2N	6.2	10	27	2.5
CTCDRH6D38_-7R4N	7.4	10	31	2.3
CTCDRH6D38_-8R7N	8.7	10	34	2.2
CTCDRH6D38_-100N	10	10	38	2.0
CTCDRH6D38_-120N	12	10	53	1.7
CTCDRH6D38_-150N	15	10	57	1.6
CTCDRH6D38_-180N	18	10	92	1.5
CTCDRH6D38_-220N	22	10	96	1.3
CTCDRH6D38_-270N	27	10	109	1.2
CTCDRH6D38_-330N	33	10	124	1.1
CTCDRH6D38_-390N	39	10	138	1.0
CTCDRH6D38_-470N	47	10	155	.95
CTCDRH6D38_-560N	56	10	202	.85
CTCDRH6D38_-680N	68	10	234	.75
CTCDRH6D38_-820N	82	10	324	.70
CTCDRH6D38_-101N	100	10	358	.65

PHYSICAL DIMENSIONS

Size	A	B	C	D	E	F Max.	G Max.
mm	6.7 ± 0.3	6.7 ± 0.3	6.5	2.0	6.5	9.5	4.0
inches	0.26 ± 0.01	0.26 ± 0.01	0.255	0.08	0.255	0.37	0.16

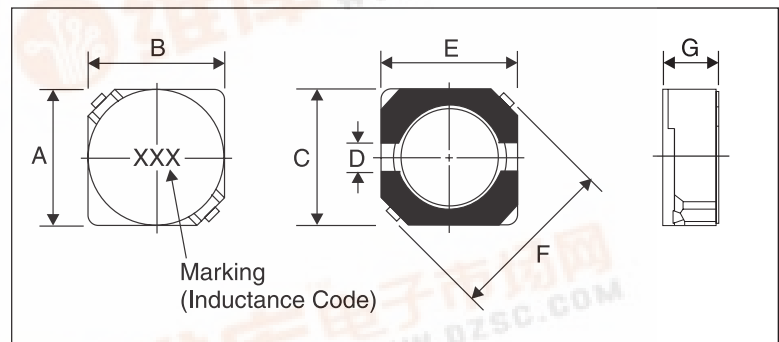

PAD LAYOUT

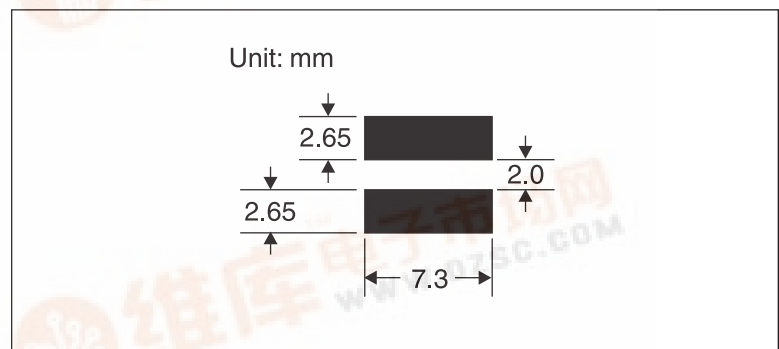

01.14.05

Manufacturer of Inductors, Chokes, Coils, Beads, Transformers & Toroids

800-684-5322 Inside US

949-453-1811 Outside US

Copyright © 2005 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice

