


查询"7212N"供应商

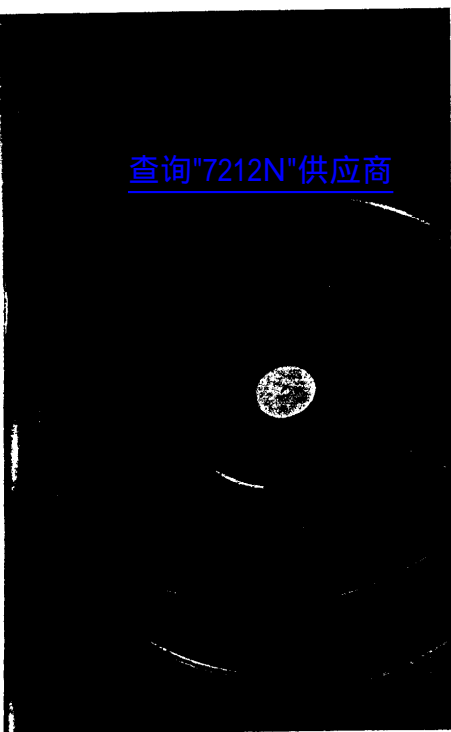

- DC fans with electronically commutated external rotor motor. Fully integrated commutation electronics. With electronic protection against reverse polarity and blocking.
- Metal fan housing, Series 7100 impellers of metal, Series 7200 of fibreglass

- reinforced plastic PA.
- Air exhaust over struts. Rotational direction CCW looking at rotor.
- Electrical connection via 2 leads AWG 22, TR 64. Stripped and tinned ends. Housing with ground lug for screw M4.
- Mass 620/725 g.

## SERIES 7100/7200

150 $\varnothing$ x38mm / 150 $\varnothing$ x55mm

| Air flow           | Air flow | Nominal Voltage | Voltage Range | Noise |      | Sinter-Sleeve Bearings | Power Input | Nominal Speed     | Temperature Range | Service Life L <sub>10</sub> | Service Life L <sub>10</sub> | Curve | Type   |
|--------------------|----------|-----------------|---------------|-------|------|------------------------|-------------|-------------------|-------------------|------------------------------|------------------------------|-------|--------|
| m <sup>3</sup> /h  | CFM      | V DC            | V DC          | dB(A) | bels | O/●                    | Watt        | min <sup>-1</sup> | °C                | Hours                        | Hours                        |       |        |
| <b>Series 7100</b> |          |                 |               |       |      |                        |             |                   |                   |                              |                              |       |        |
| 360                | 211.9    | 12              | 6...15        | 55    | 6.5  | ●                      | 12          | 2850              | -25...+72         | 80000 / 37500                |                              | 1     | 7112N  |
| 360                | 211.9    | 24              | 12...30       | 55    | 6.5  | ●                      | 12          | 2850              | -25...+72         | 80000 / 37500                |                              | 1     | 7114N  |
| 420                | 247.2    | 24              | 12...26.5     | 59    | 7.0  | ●                      | 19          | 3350              | -25...+72         | 75000 / 35000                |                              | 3     | 7114NH |
| 360                | 211.9    | 48              | 24...60       | 55    | 6.5  | ●                      | 12          | 2850              | -25...+72         | 80000 / 37500                |                              | 1     | 7118N  |
| <b>Series 7200</b> |          |                 |               |       |      |                        |             |                   |                   |                              |                              |       |        |
| 360                | 211.9    | 12              | 6...15        | 50    | 6.2  | ●                      | 12          | 3050              | -25...+72         | 80000 / 37500                |                              | 2     | 7212N  |
| 360                | 211.9    | 24              | 12...30       | 50    | 6.2  | ●                      | 12          | 3050              | -25...+72         | 80000 / 37500                |                              | 2     | 7214N  |
| 360                | 211.9    | 48              | 24...60       | 50    | 6.2  | ●                      | 12          | 3050              | -25...+72         | 80000 / 37500                |                              | 2     | 7218N  |

⊕ 48V Type with grounding screw M4x8 (TORX).

