


# Mercury Cadmium Telluride

SPECIFICATIONS FOR STANDARD DETECTOR

查询"16A"供应商

InfraRed ASSOCIATES, Inc.

1000 Route 130, Cranbury, NJ 08512 (609) 395-7600, Telex 642282

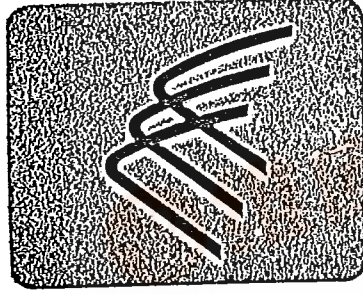

## 14-16 microns

MODEL	SIZE (inches)	D* (cm Hz <sup>1/2</sup> /watt)	TIME CONSTANT (nanoseconds)
16 A	.002 to .040	≥2.0 × 10 <sup>10</sup>	~200
16 B	.060 to .100	≥1.5 × 10 <sup>10</sup>	~200
16 C	.002 to .040	≥1.0 × 10 <sup>10</sup>	~100
16 D	.060 to .100	≥1.0 × 10 <sup>10</sup>	~100
16 E	.002 to .100	≥5.0 × 10 <sup>9</sup>	~100

These photoconductive HgCdTe detectors have peak response in the 14-16 micron region. The high signal-to-noise ratio of these devices make them ideal for applications in which liquid Helium cooled detectors were required in the past. They have found extensive use in analytical instruments, spectroscopy, research, etc.

Custom packaging and detector geometries are available in addition to our standard dewars and sizes. Low noise matched preamplifiers are available for optimum detector performance.

- ... Tolerance on sizes under .040, ± 10% to a minimum of .0003
- ... Tolerance on sizes over .040, ± 5%
- ... All D\* Values are shown D\* (10 KHz, 1, 60°)
- ... Packaging options include flatpaks, side or endlooking metal dewars

The above specifications represent IRA's standard product line only. Information on custom detectors and arrays is available upon request.

