



[查询"DEV-51MF"供应商](#)

P/N: DEV-51MF DATA SHEET

Feature





- Design to meet, UL94v-0.
- Operating temperature range: -10°C to +60°C.
- Storage temperature range: -25°C to +75°C.

Electrical Specifications @ 25°C		
Passband Frequency		DC to 3.4KHz
		0.3KHz to 3.4KHz
Insertion Loss		-1.0dB Max@1004Hz
Attenuation Distortion		±1.5dB @200Hz~3.4KHz
		±2.0dB @3.4KHz~4KHz
Return Loss	@ERL	-6.0dB Min
	@SRL-L	-5.0dB Min
	@SRL-H	-3.0dB Min
DCR		25Ω Max
ADSL Band Attenuation		-25dB Min @25KHz
		-30dB Min @30KHz

Schematic

Mechanical

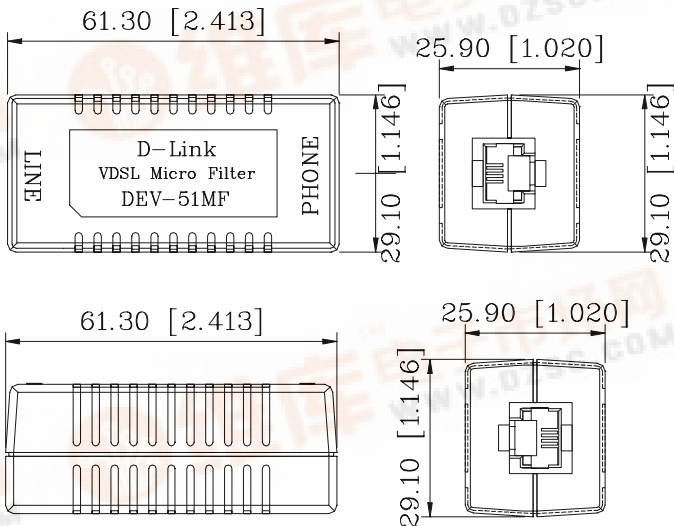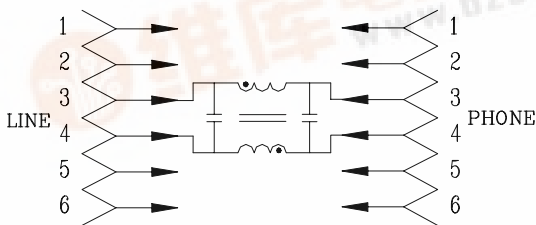

Units: mm Tolerances: xx.x0±0.25[0.010]
0.xx±0.05[0.002]